



PR2 -
V_{PP} 9.9849V
V_{RMS} 3.5355V
V_{AV} 24.886pV
f_V 1.0000kHz
REF1 -
PR1 -
V_{PP} 554.72mV
V_{RMS} 196.42mV
V_{AV} 1.3826pV
f_V 1.0000kHz
REF1 -
1
2
V1
5V
1kHz
0°
REF1
Fouad Aladhami


PR2 -
V_{PP} 9.9849V
V_{RMS} 3.5355V
V_{AV} -11.900pV
f_V 1.0000kHz
REF1 -
PR1 -
V_{PP} 312.03mV
V_{RMS} 110.49mV
V_{AV} -371.87fV
f_V 1.0000kHz
REF1 -
1
2
V1
5V
1kHz
0°
REF1
0
Fouad Aladhami

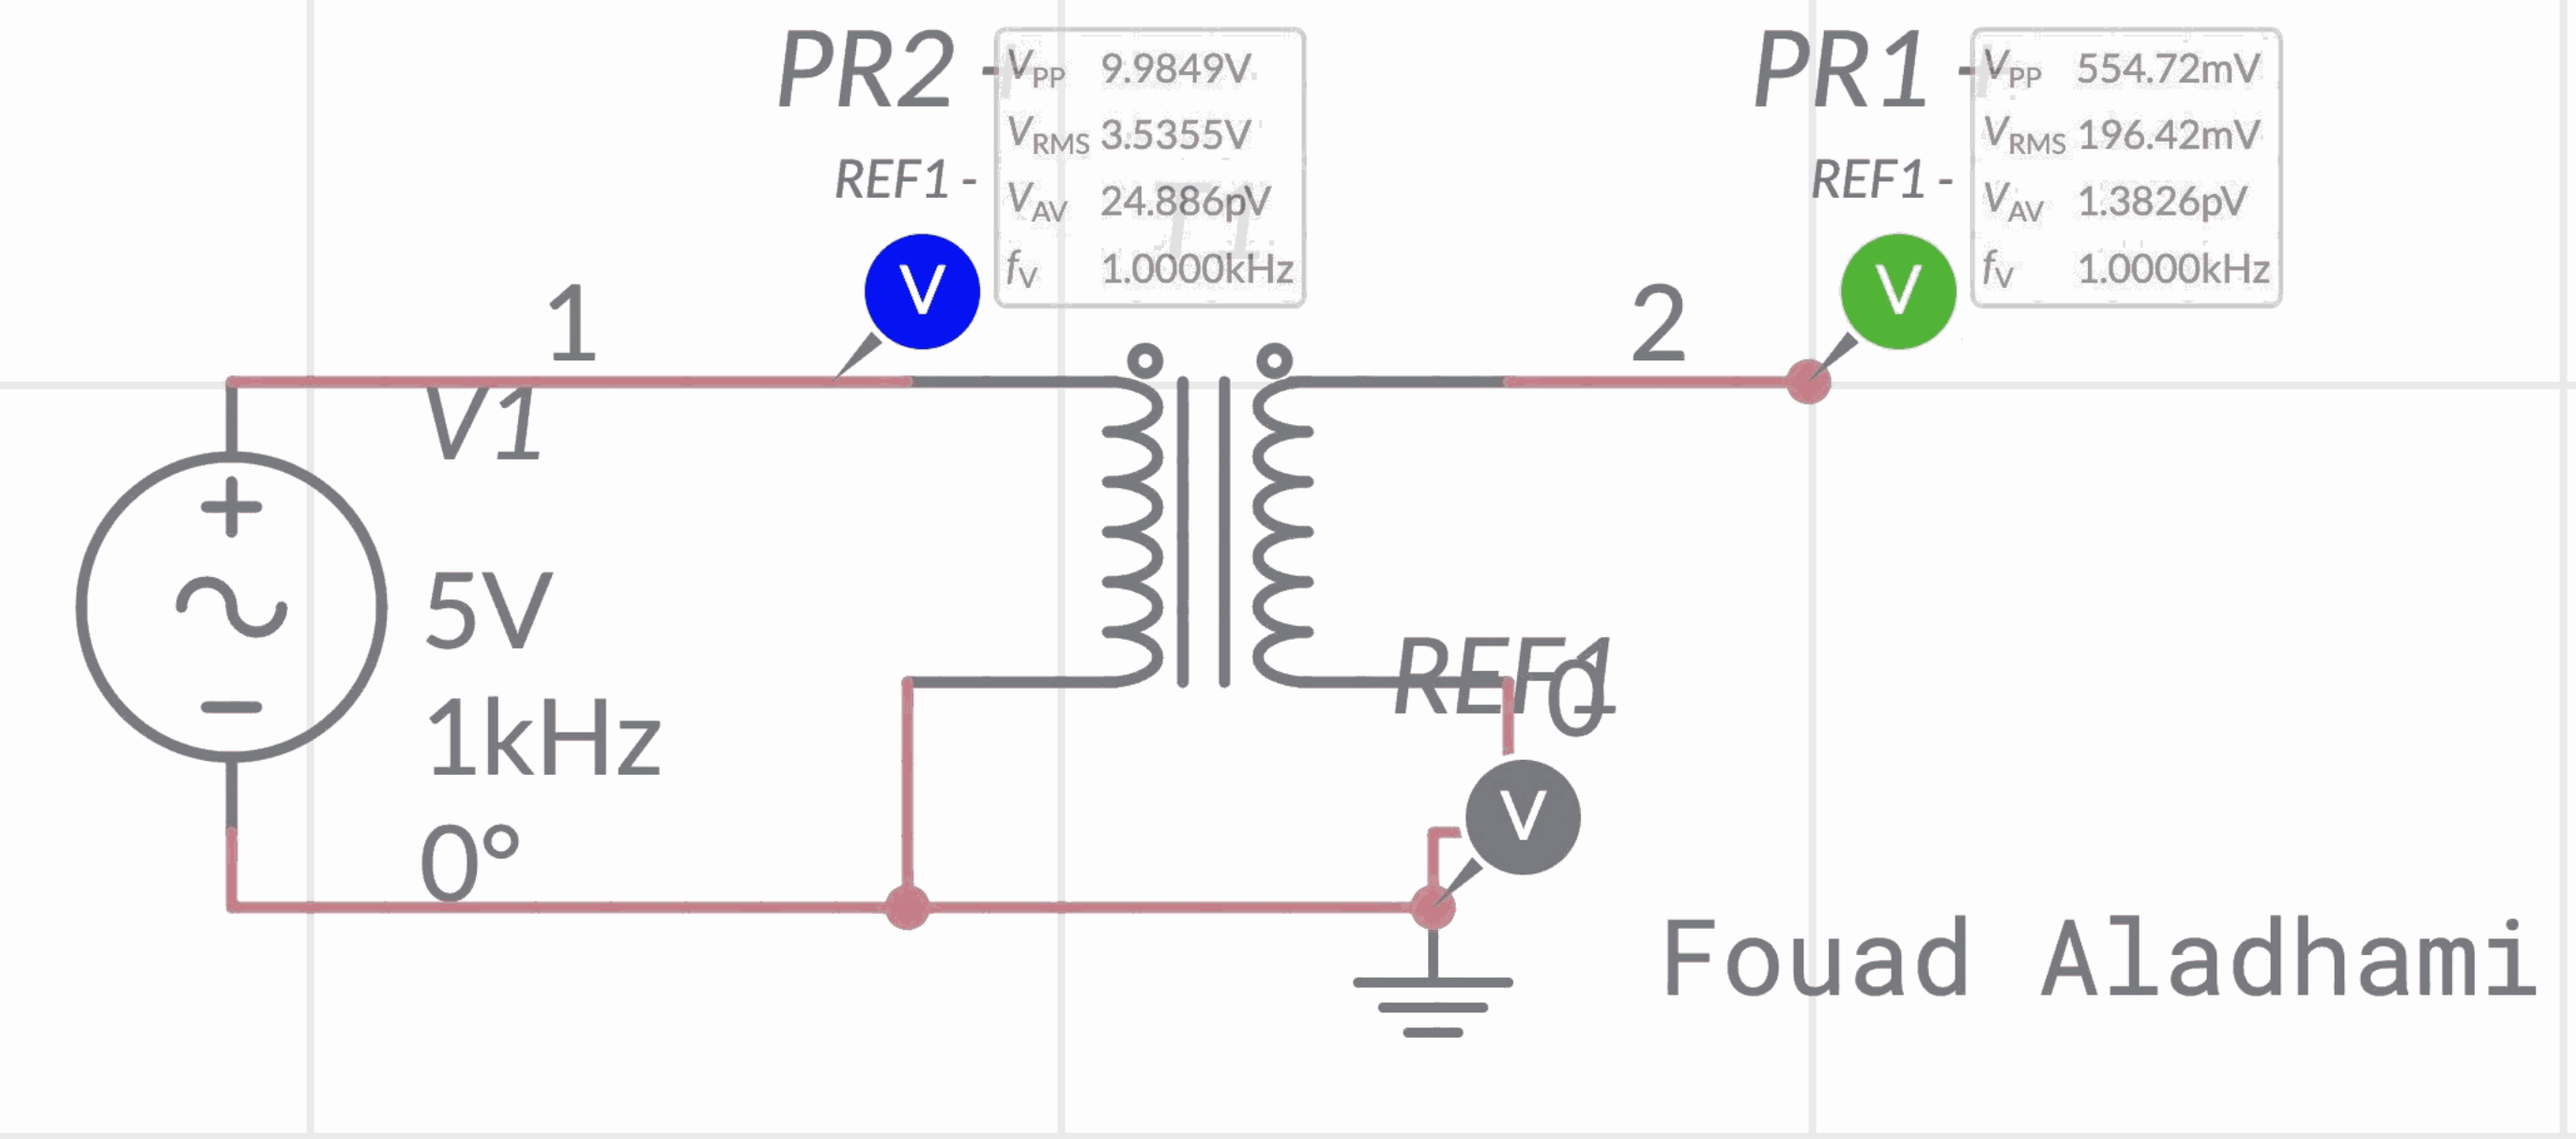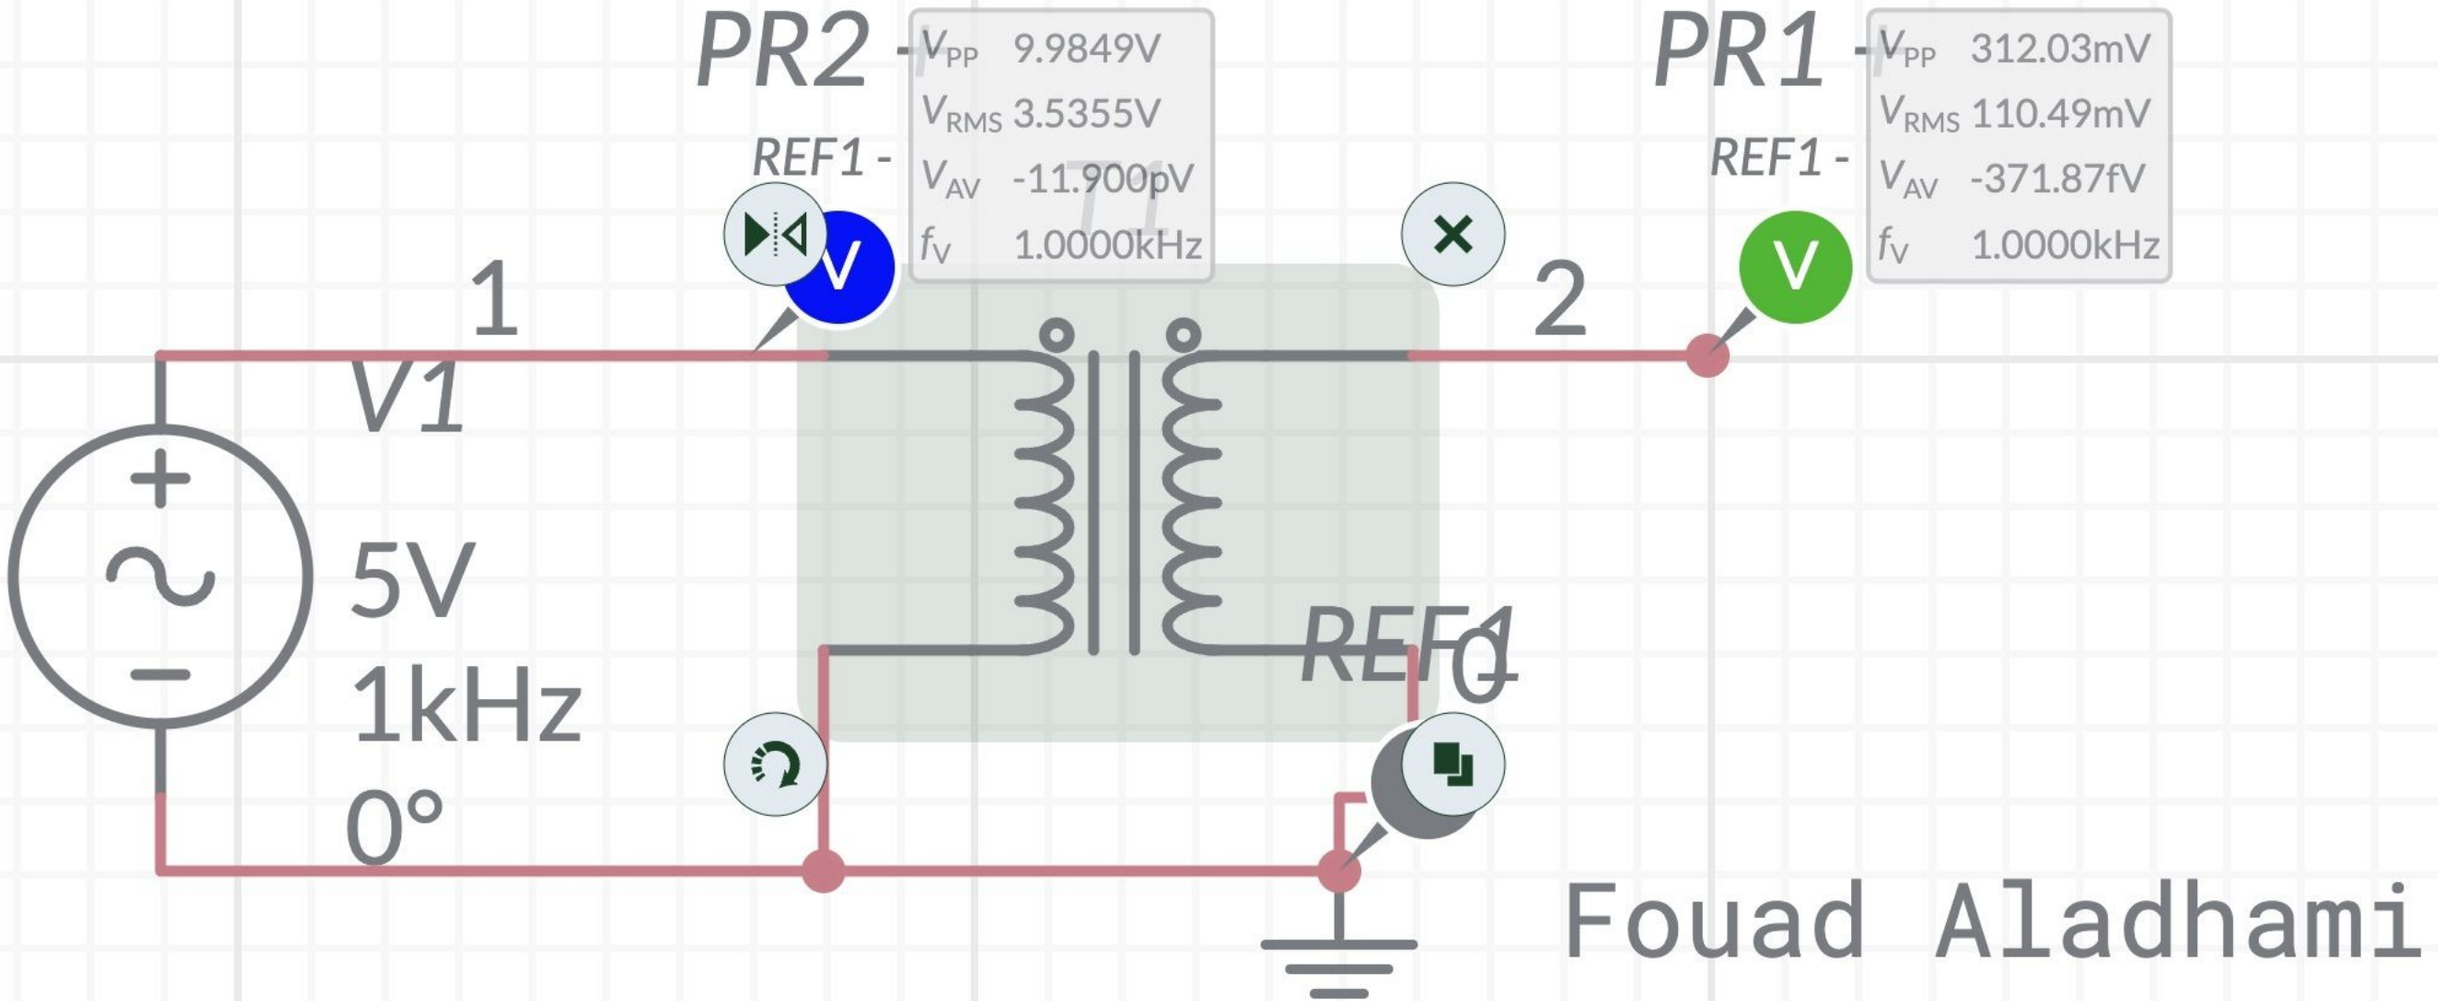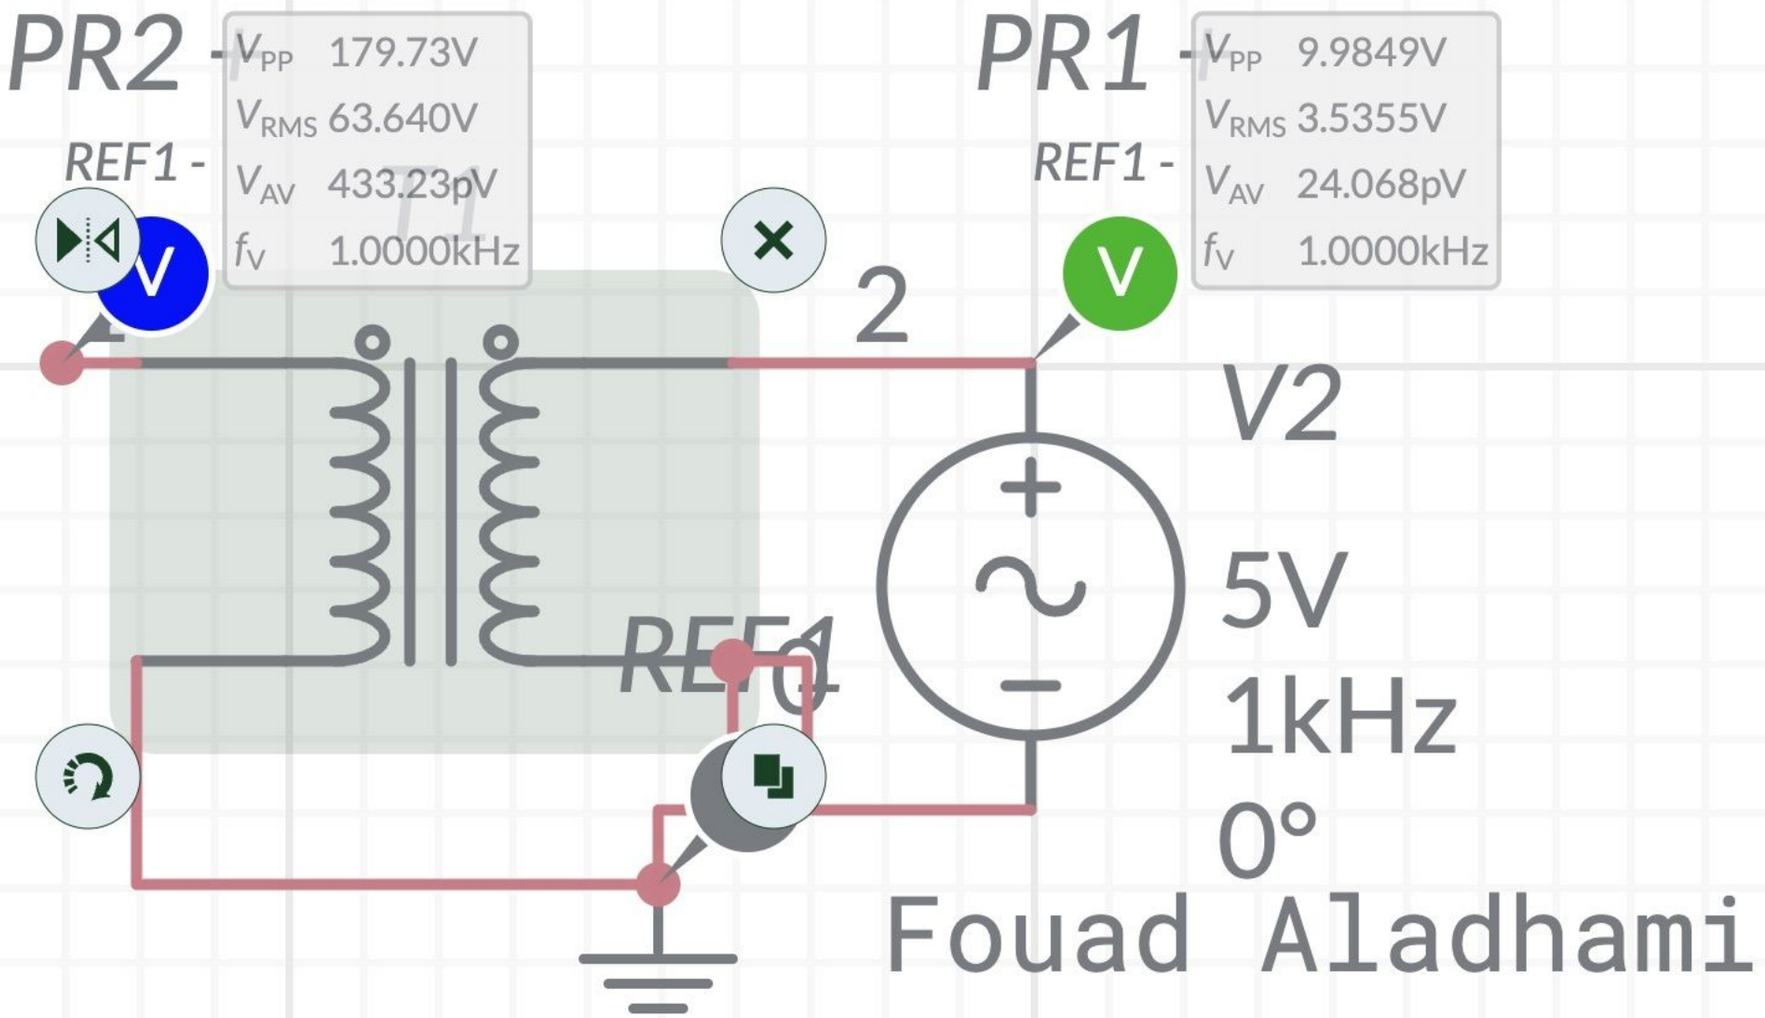

Configurable transformer, 1 primary, 1 secondary. See Configurable transformer for more information.

Model [?]

1P1S

See Configurable transformer model for more information.

PTurns 18

Primary coil turns

PNegativePolarity

Use negative polarity for primary coil

STurns 1


Secondary coil turns

SNegativePolarity

Use negative polarity for secondary coil

Symbol

Details

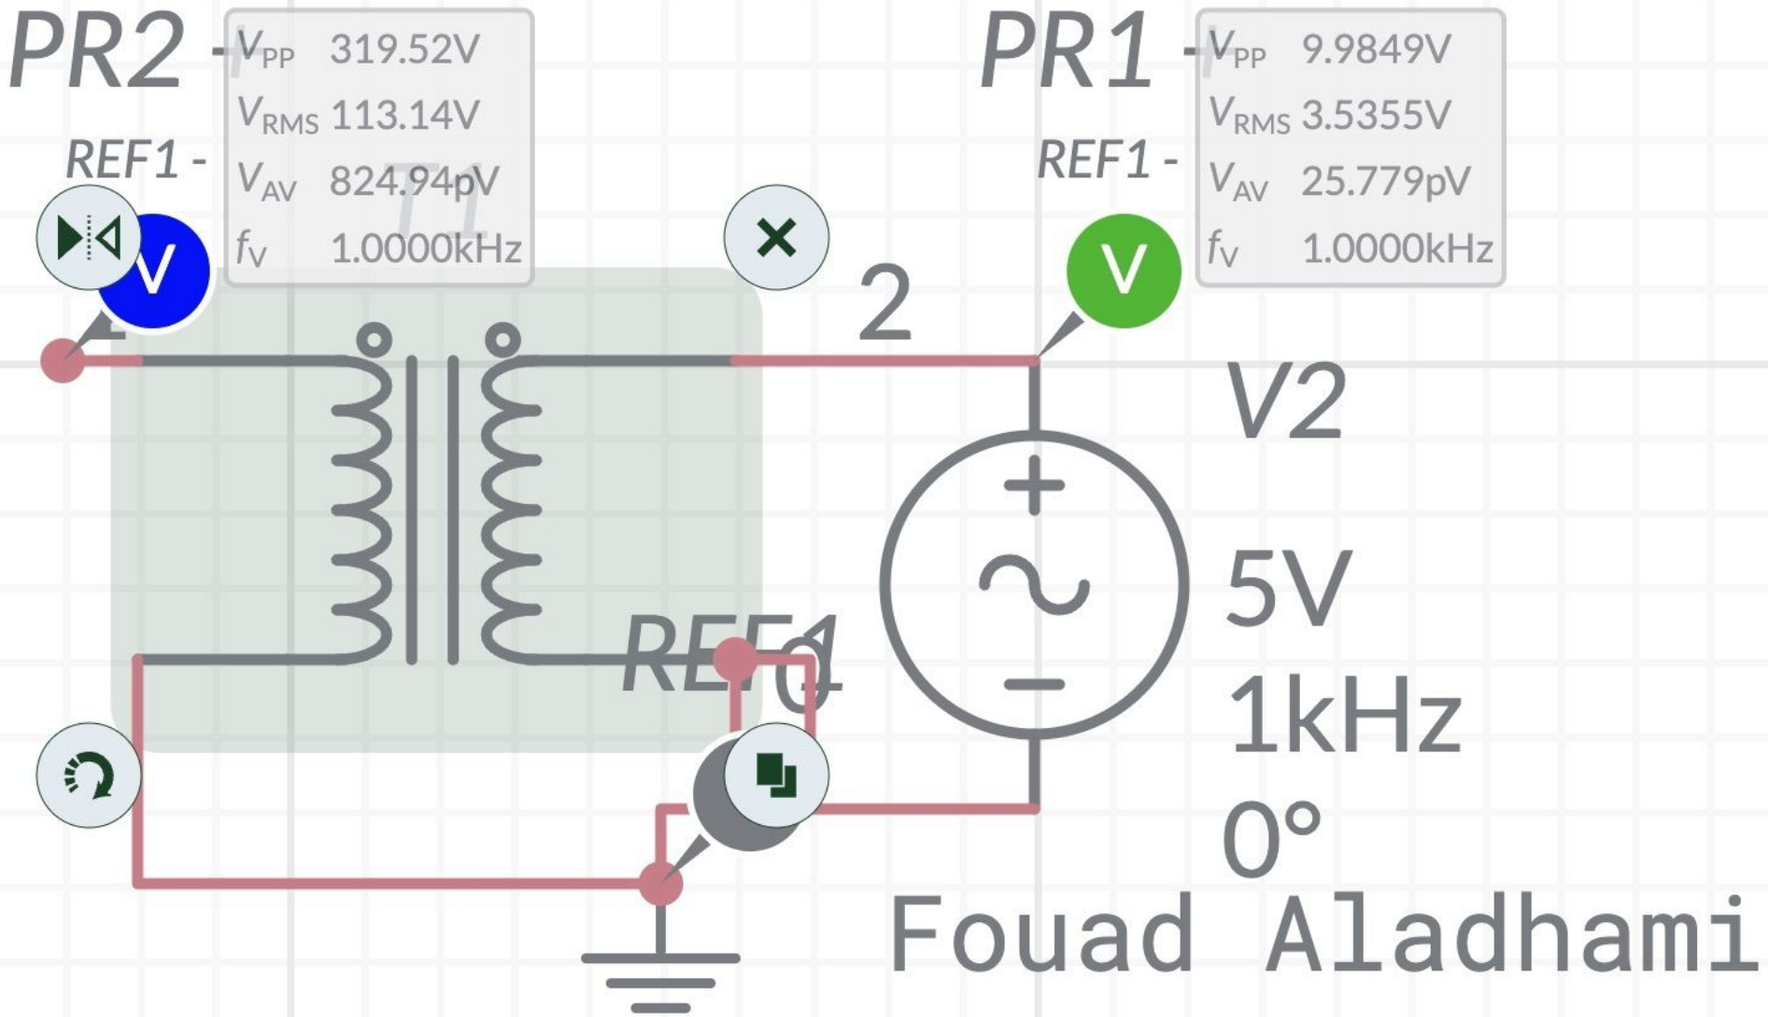

Configurable transformer, 1 primary, 1 secondary. See Configurable transformer for more information.

▼ Model

1P1S

See Configurable transformer model for more information.

PTurns 32

Primary coil turns

PNegativePolarity

Use negative polarity for primary coil

STurns 1


Secondary coil turns


SNegativePolarity

Use negative polarity for secondary coil


▶ Symbol

▶ Details

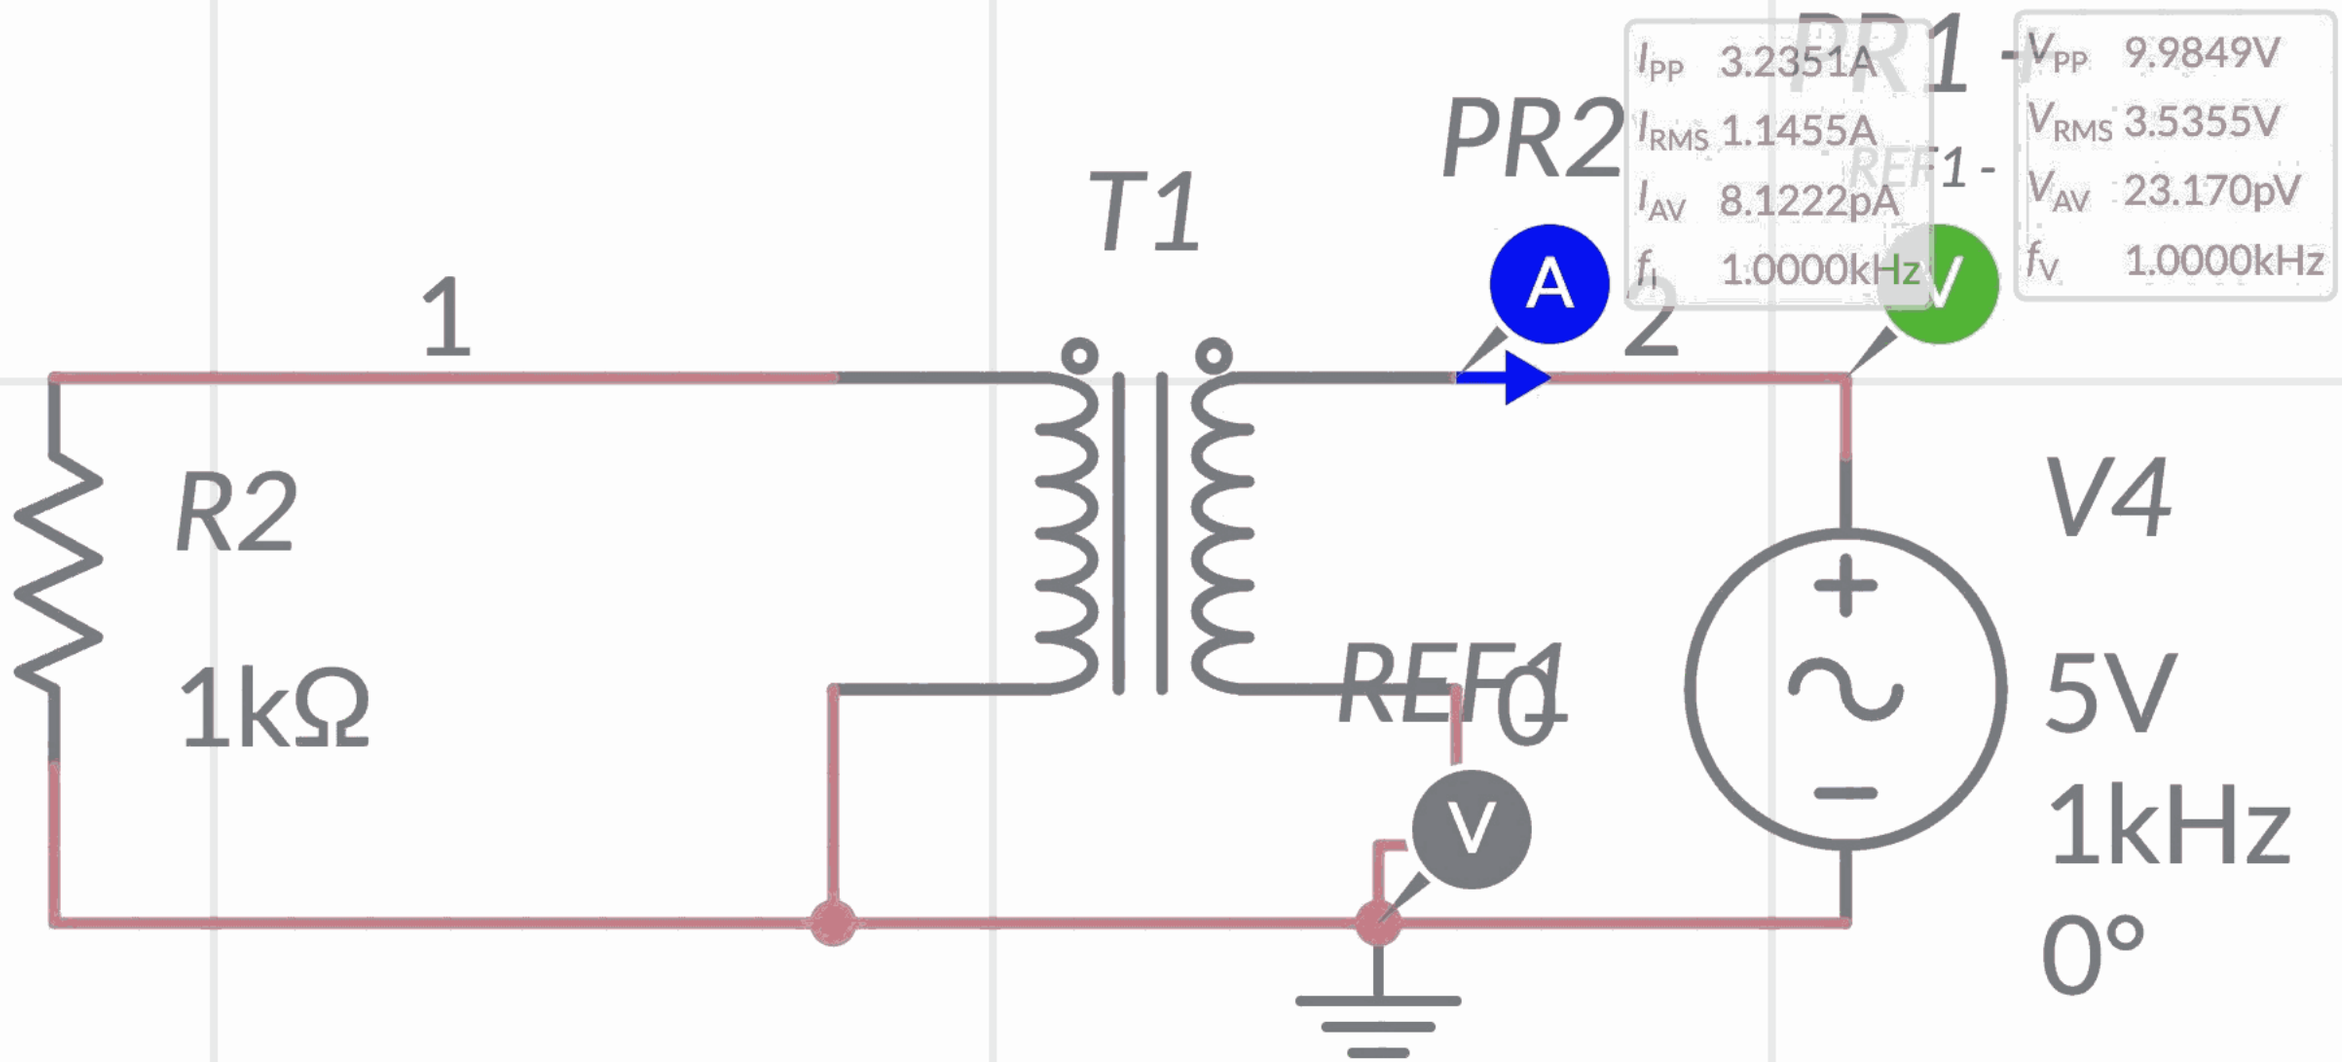
PR1
I_{PP} 3.2351A
I_{RMS} 1.1455A
I_{AV} 8.1222pA
f_I 1.0000kHz
V_{PP} 9.9849V
V_{RMS} 3.5355V
V_{AV} 23.170pV
f_V 1.0000kHz
PR2
T1
1
2
A
V
R2
1kΩ
REF1
V4
5V
1kHz
0°
Fouad Aladhami

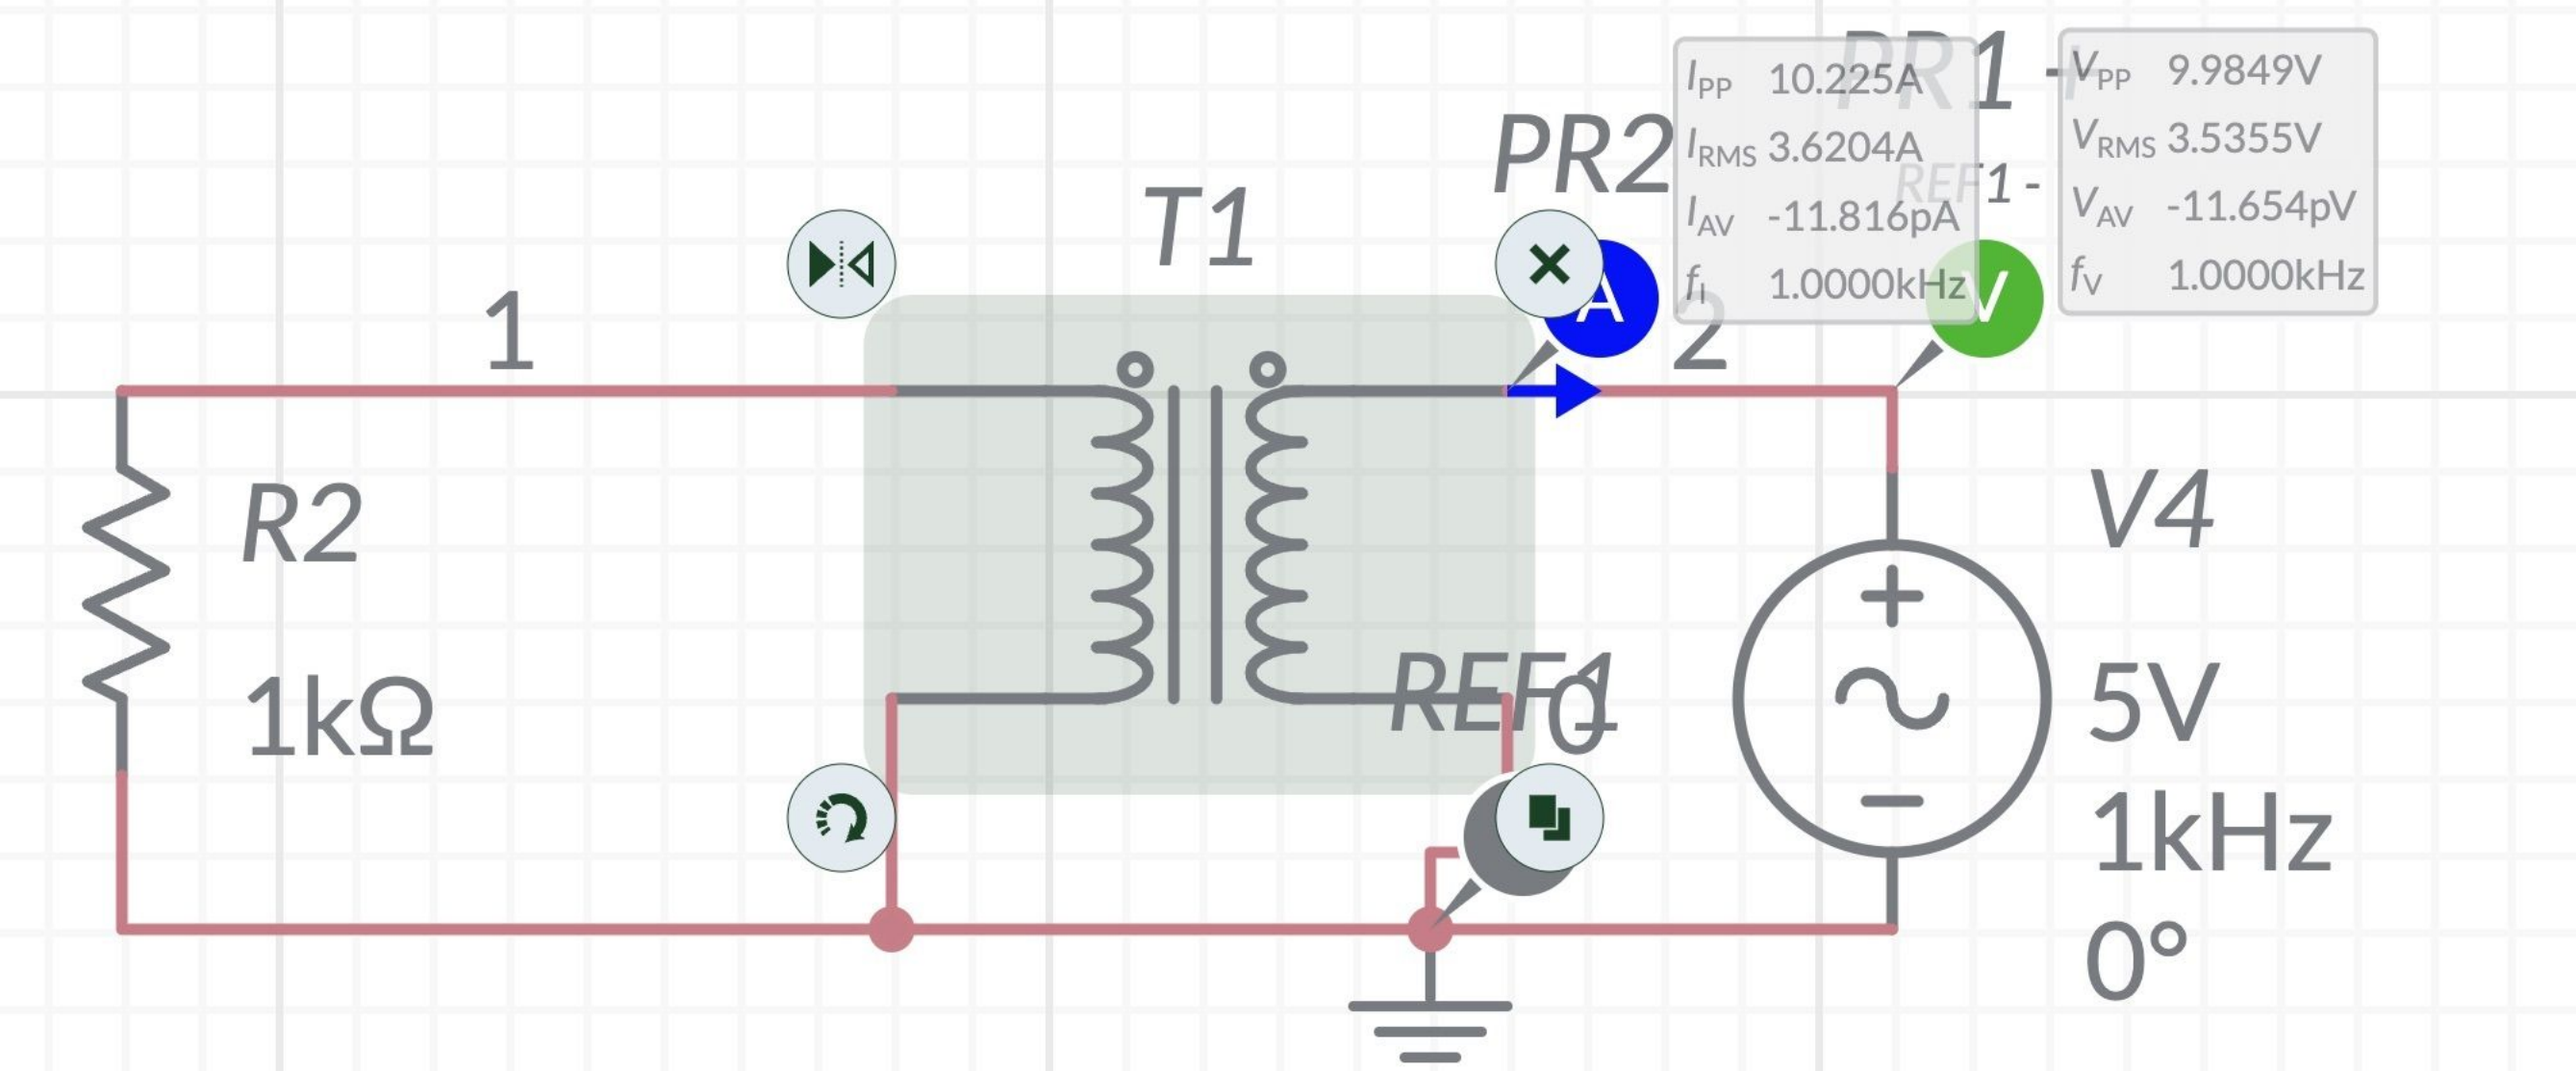

Fouad Aladhami

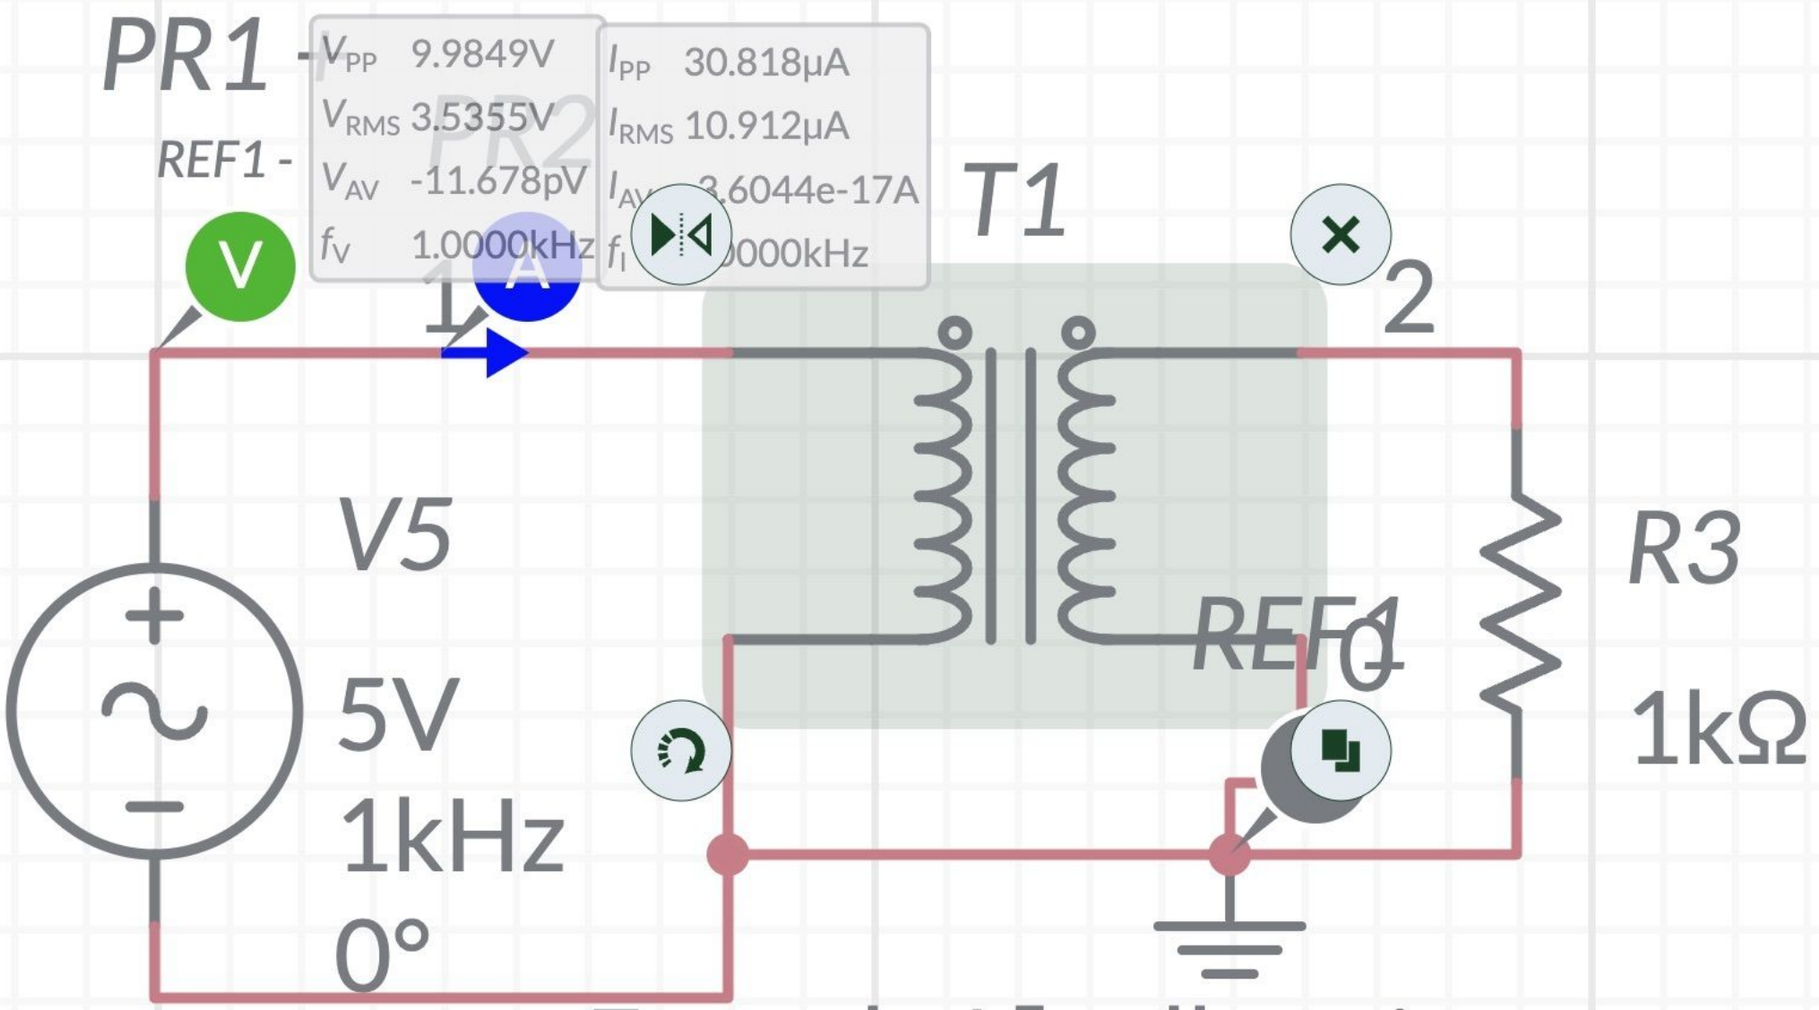

Configurable transformer, 1 primary, 1 secondary. See Configurable transformer for more information.

Model [?]

1P1S

See Configurable transformer model for more information.

PTurns 18
Primary coil turns


PNegativePolarity
Use negative polarity for primary coil

STurns 1
Secondary coil turns

SNegativePolarity
Use negative polarity for secondary coil

Symbol

Details

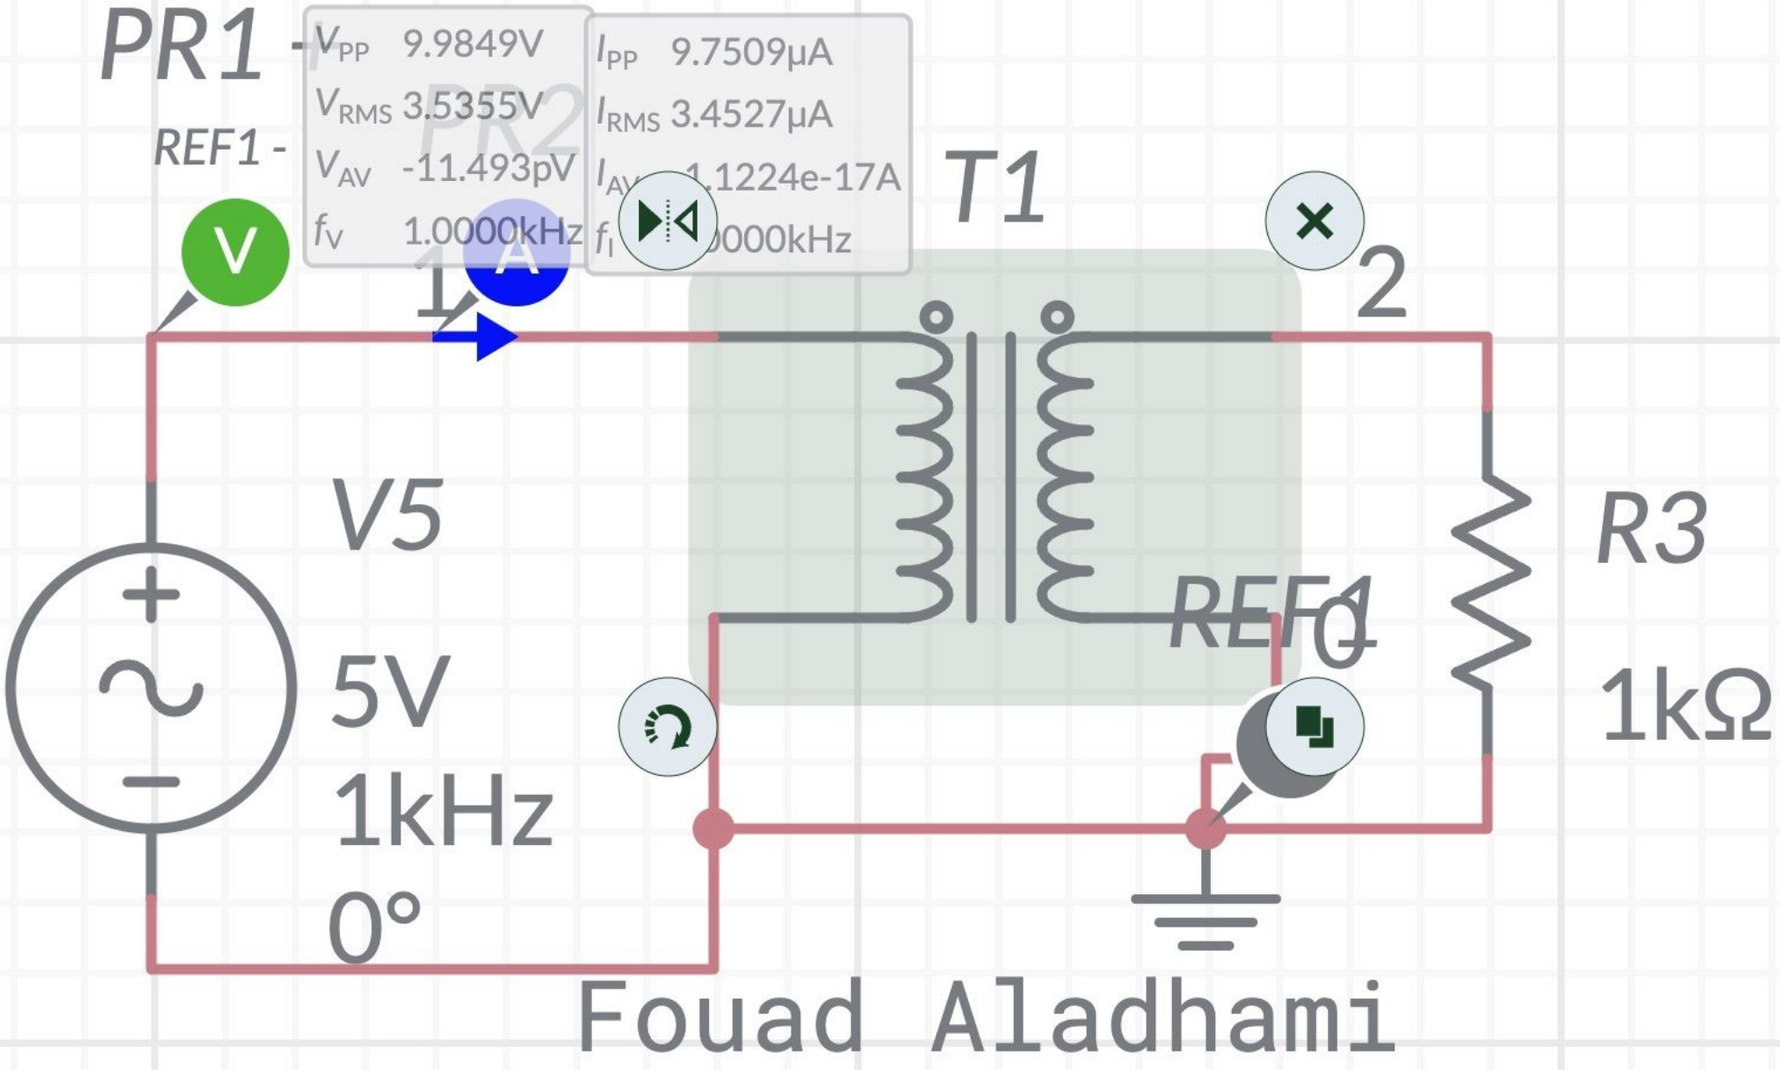

Configurable transformer, 1 primary, 1 secondary. See Configurable transformer for more information.

Model [?]

1P1S

See Configurable transformer model for more information.

PTurns 32

Primary coil turns

PNegativePolarity

Use negative polarity for primary coil

STurns 1

Secondary coil turns

SNegativePolarity

Use negative polarity for secondary coil

Symbol

Details