


Python → generated C++ → ESP8266 validation pipeline

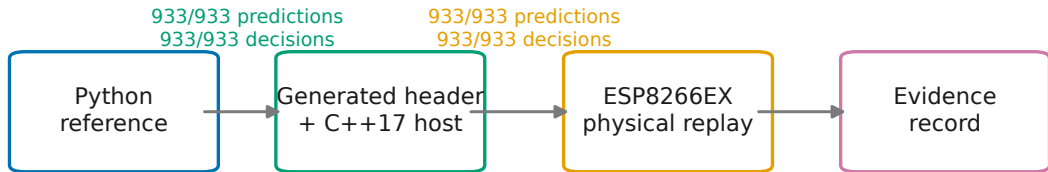

Pre-flash compiled-host parity → complete physical held-out-vector parity

This validates numerical portability of frozen vectors; it does not validate live sensing.