[7] Connectors

MR60PW stat :

- **Current: 35 A max (with specified temperature rise < 85°C)**
- **Voltage: 600 V DC**
- **Insulation resistance: ≥ 2000 MΩ**
- **Contact resistance: ≤ 1.0 mΩ**
- **Mating cycles (lifetime): 100 cycles**
- **Salt spray: 48 h**
- **Ingress protection rating: IP40**
- **Operating temperature: -20°C to 120°C**
- **Flammability rating: UL94 V-0 (0.8 mm wall thickness)**

MR60PW


DESIGN NOTE:
Gain A1->A5 (INA241)
INA241A1 : 10V/V
INA241A2 : 20V/V
(fitted)
INA241A3 : 50V/V
INA241A4 : 100V/V
INA241A5 : 200V/V

DESIGN NOTE:
Capacitor Découplage
0603
Ceramique X7R
>16V

LAYOUT NOTE:
blabla

Vout≈Vref+(Gain)×(I×Rshunt)

Shouse your INA240A...

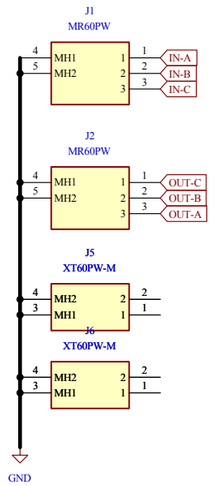

CONNECTEUR

FILTRE

Test Point

Comments: **References:** Flexible I/O worked examples; Flexible I/O source configuration	Company: **OPEN THRUST LAB**		Variant:	Git Hash: 7703dc5
	Board Name: **PHASETRACKER**		Project Name: **OPEN_PHASE**	
Sheet Title: Connectors	File Name: Connectors.kicad_sch	Designer: SIEBERT DIMITRY	Date: 2026-10-05	Revision: + (Unreleased)
Sheet Path: /Project Architecture/Connectors/		Reviewer:	Size: **A3**	Sheet: **7** of **10**