

[2] Block Diagram

SCHÉMA BLOC · CHAÎNE DE MESURE (BATTERIE, PHASES) ET ALIMENTATION

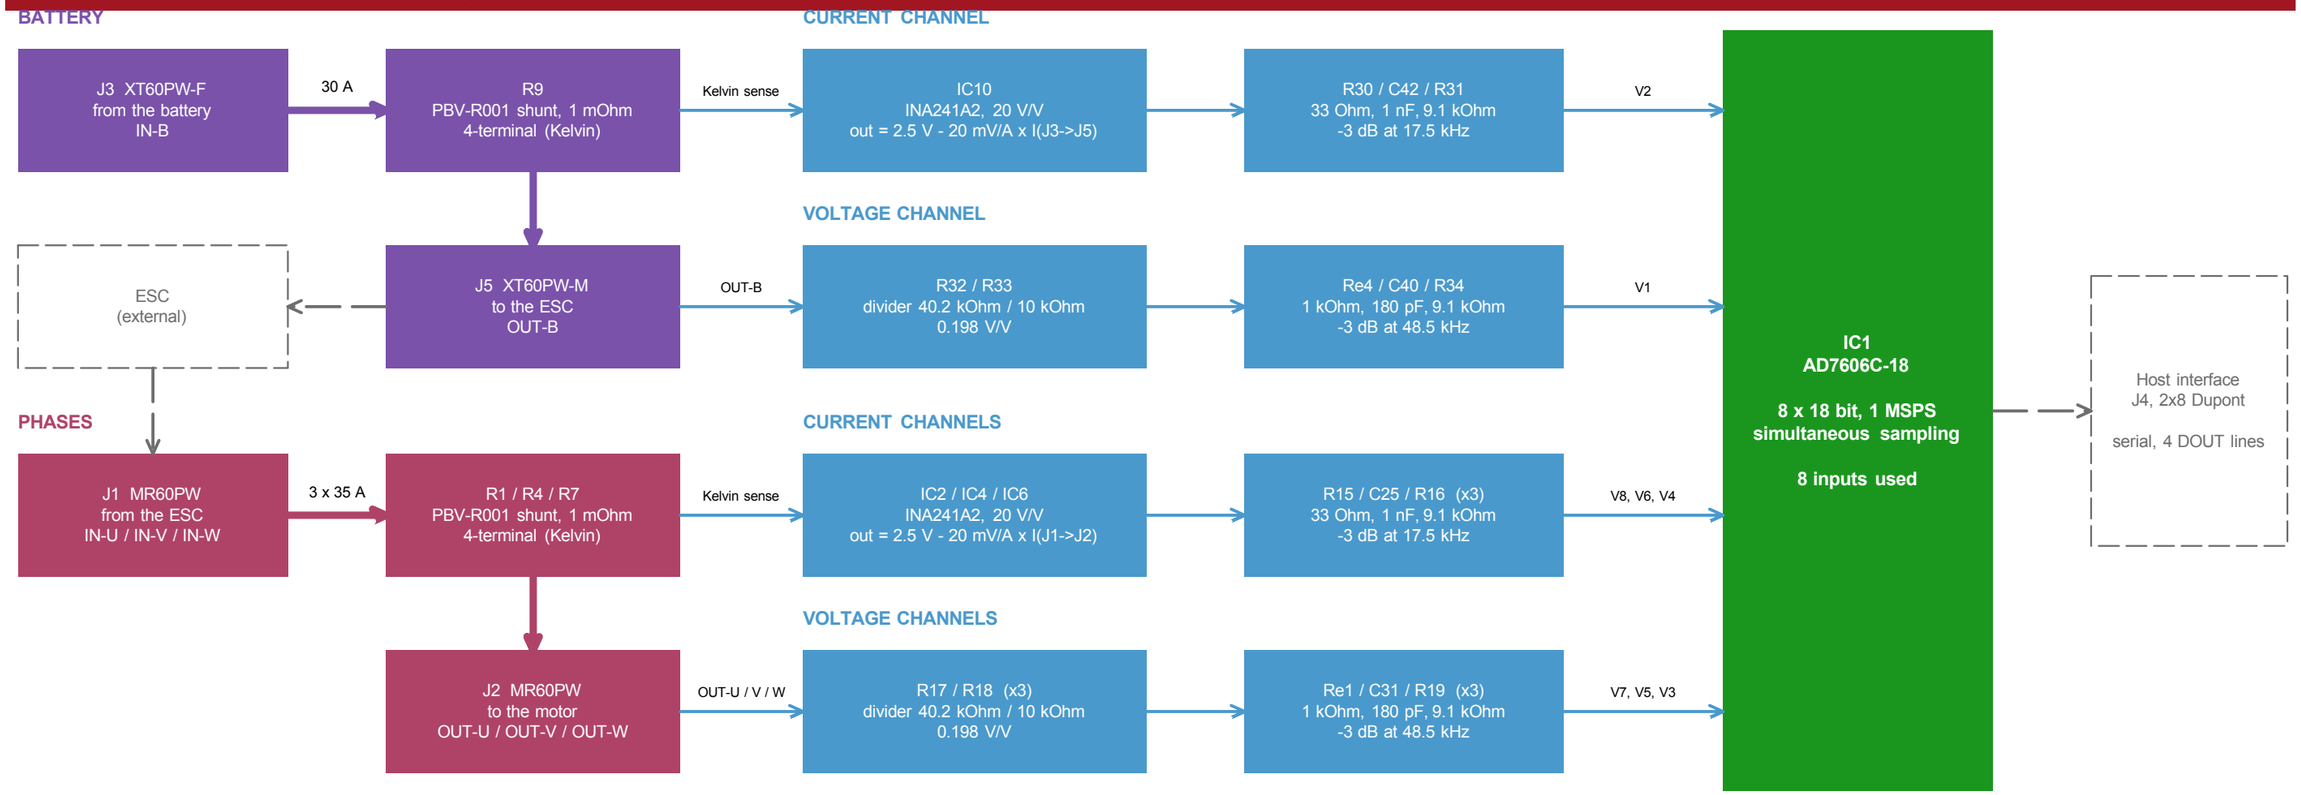

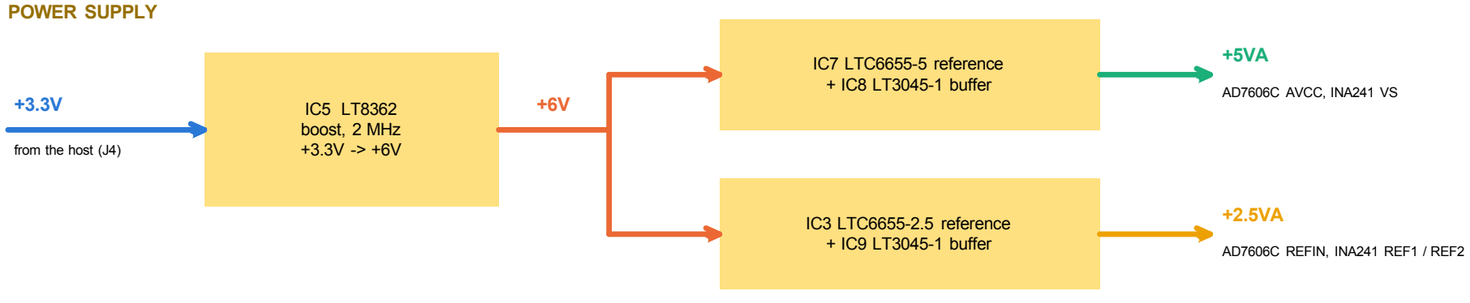

SPÉCIFICATIONS CIBLES

Supply:	3.3 V, 130 mA
Phase current:	35 A continuous (MR60PW)
Phase current max:	60 A peak (MR60PW)
Battery current:	30 A continuous (XT60PW)
Current range:	+/-115 A, 20 mV/A
Voltage range:	0 - 50 V, 0.198 V/V
Bandwidth:	17.5 kHz (I), 48.5 kHz (V)
ADC:	8 x 18 bit, 1 MSPS

Comments:	Company: OPEN THRUST LAB		Variant:	Git Hash: 04dd92c
	Board Name: PHASETRACKER		Project Name: OPEN_PHASE	
Sheet Title: Block Diagram	File Name: Block Diagram.kicad_sch	Designer: SIEBERT DIMITRY	Date: 2026-10-11	Revision: + (Unreleased)
Sheet Path: /Block Diagram/		Reviewer:	Size: A3	Sheet: 2 of 10