[6] Power Supply
- Analog Rails

DESIGN NOTE:
Gain A1->A5 (INA241)
INA241A1 : 10V/V
INA241A2 : 20V/V
(fitted)
INA241A3 : 50V/V
INA241A4 : 100V/V
INA241A5 : 200V/V


DESIGN NOTE:
Capacitor Découplage
0603
Ceramique X7R
>16V


LAYOUT NOTE:
blabla

Description


Vout≈Vref+(Gain)×(I×Rshunt)

Shouse your INA240A...

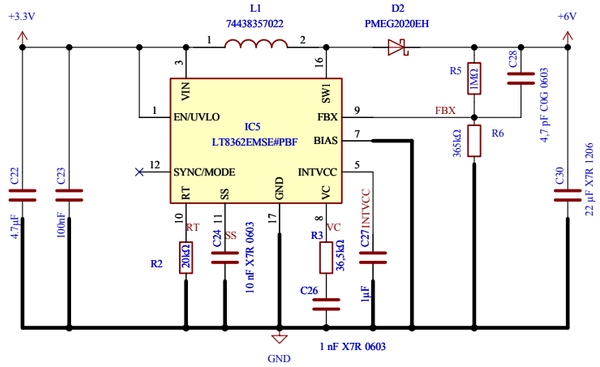

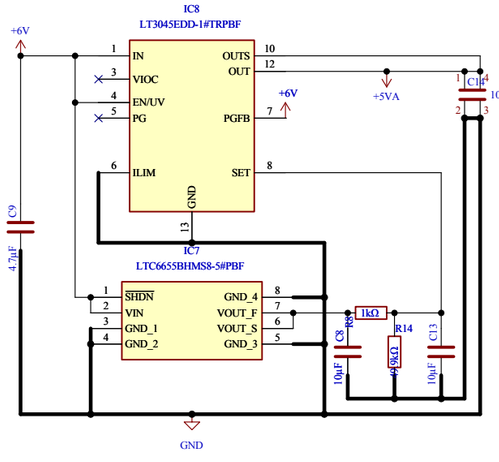

5VA précision Alimentation

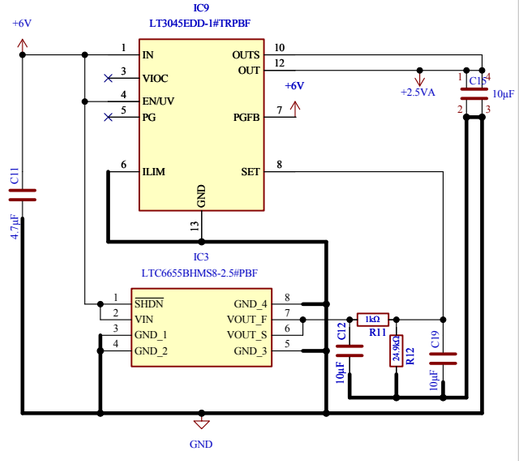

2.5VA précision Alimentation

Don't panic

it's just a regular capacitor with a slightly modified footprint to better cover the 1 MHz and higher bands.

Non-critical detail.

Test Point

Comments: **References:** Flexible I/O worked examples Flexible I/O source configuration	Company: **OPEN THRUST LAB**		Variant:	Git Hash: 7703dc5
	Board Name: **PHASETRACKER**		Project Name: **OPEN_PHASE**	
Sheet Title: Power Supply - Analog Rails	File Name: Power Supply - Analog Rails.kicad_sch	Designer: SIEBERT DIMITRY	Date: 2026-10-06	Revision: + (Unreleased)
Sheet Path: /Project Architecture/Power_Supply/		Reviewer:	Size: **A3**	Sheet: **6** of **10**