

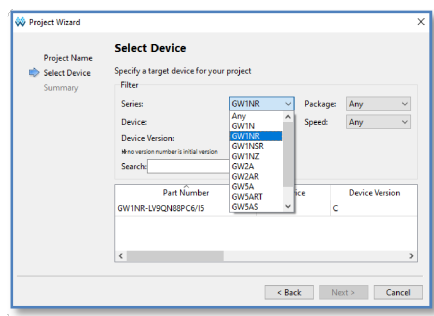
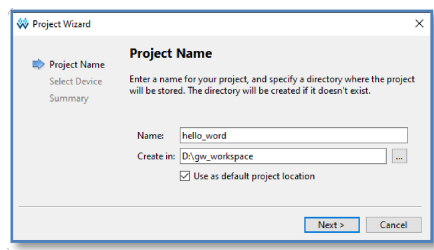


Setup Gowin for TangNano9K

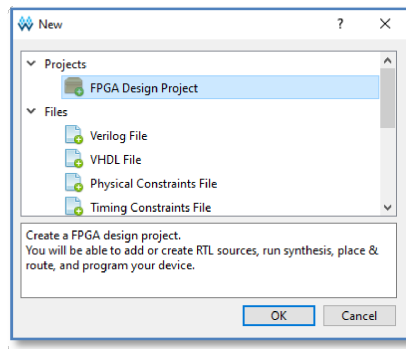

https://gowinsemi.com/en/support/download_eda/



Tang Nano 9K





Series: GW1NR
Device: GW1NR -9C
Part Number: GW1NR-LV9QN88PC6/I5

Tang Nano 20K

Series: GW2AR
Device: GW2AR-18
Part Number: GW2AR-LV18QN88C8/I7

Tang Primer 20K

Series: GW2A
Device: GW2A-18
Part Number: GW2A-LV18PG256C8/I7

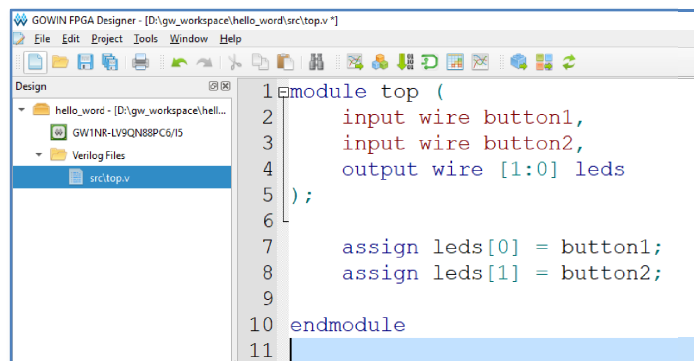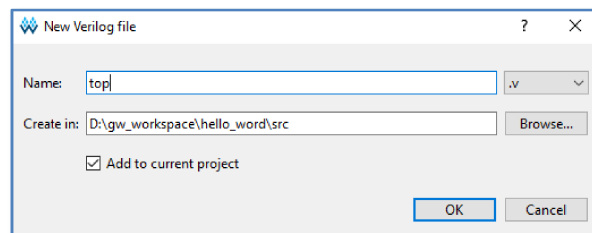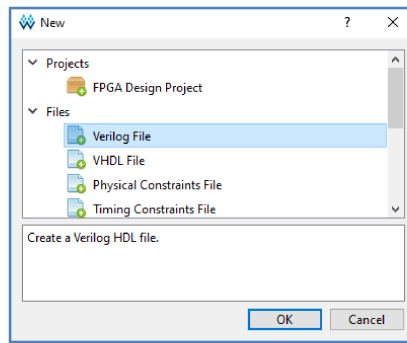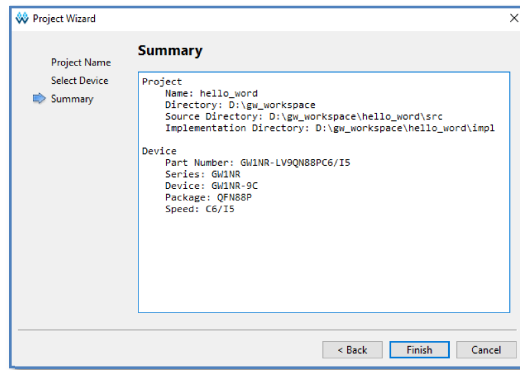

top.v






```

module top (
    input wire button1,
    input wire button2,
    output wire [1:0] leds
);

    assign leds[0] = button1;
    assign leds[1] = button2;




endmodule

```

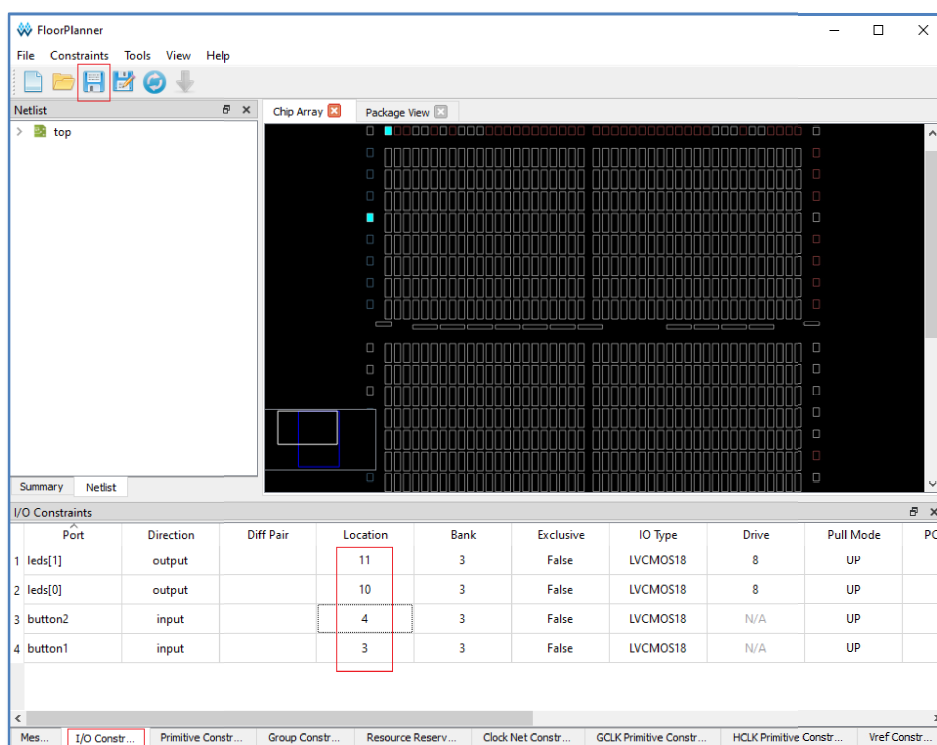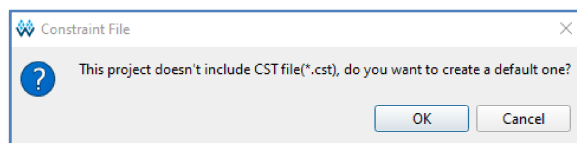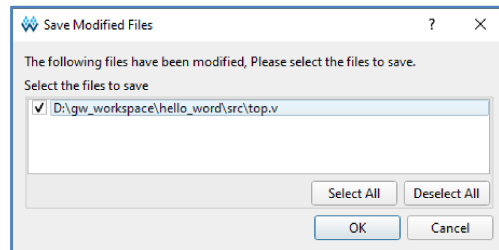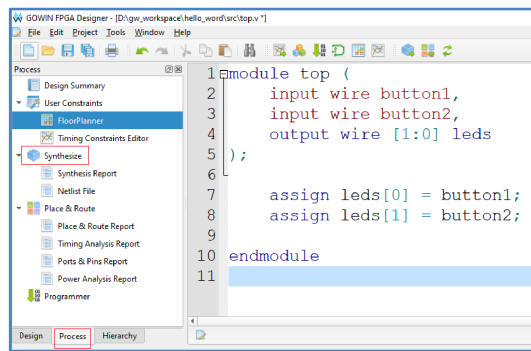

Hardware Schematic

<https://wiki.sipeed.com/hardware/en/tang/Tang-Nano-9K/Nano-9K.html>

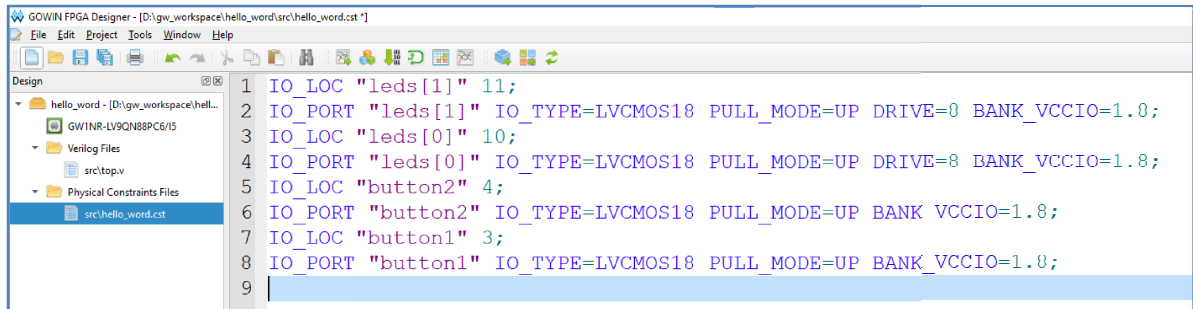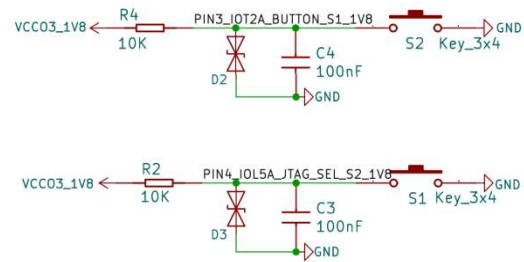
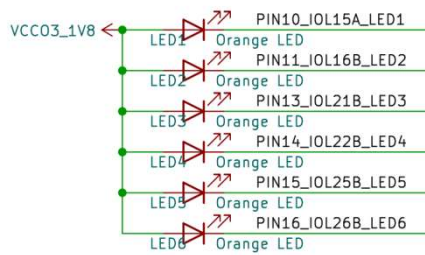





hello_word.cst

```

IO_LOC "leds[1]" 11;
IO_PORT "leds[1]" IO_TYPE=LVC MOS18 PULL_MODE=UP DRIVE=8 BANK_VCCIO=1.8;
IO_LOC "leds[0]" 10;
IO_PORT "leds[0]" IO_TYPE=LVC MOS18 PULL_MODE=UP DRIVE=8 BANK_VCCIO=1.8;
IO_LOC "button2" 4;
IO_PORT "button2" IO_TYPE=LVC MOS18 PULL_MODE=UP BANK_VCCIO=1.8;
IO_LOC "button1" 3;
IO_PORT "button1" IO_TYPE=LVC MOS18 PULL_MODE=UP BANK_VCCIO=1.8;

```

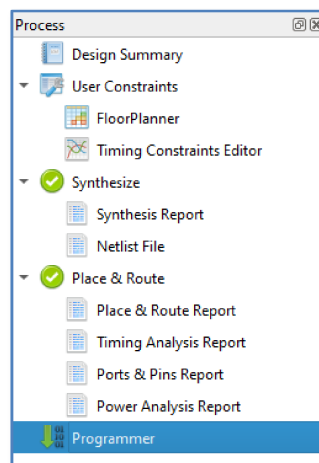

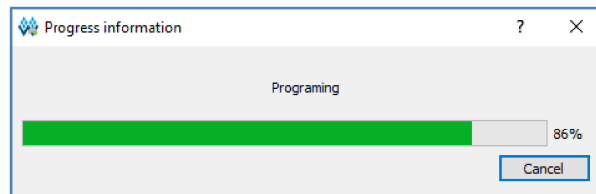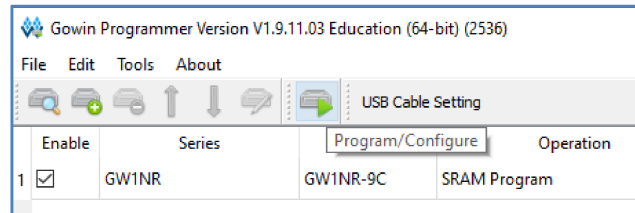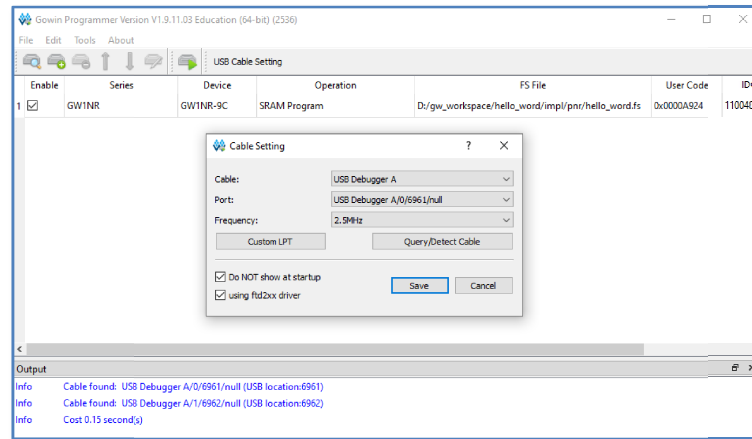

Tang Nano 9K

