
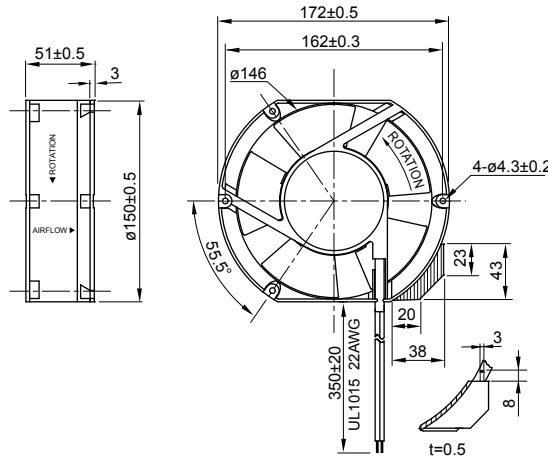


UF15P Series

Size: 172 x 150 x 51
Unit : mm

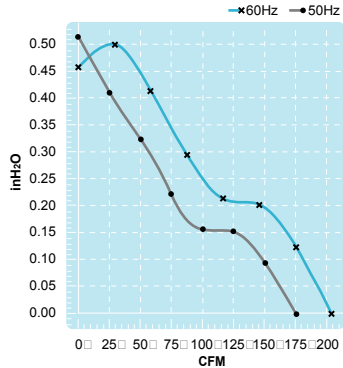

Terminal or Lead Wire Type

Impedance Protection

Spec. Model	Rated Voltage V	Frequency Hz	Input Power W	Rated Current A	Locked Current A	Speed RPM	Maximum Air Flow m ³ /min.	Maximum Air Flow CFM	Maximum Pressure mmH ₂ O	Maximum Pressure InchH ₂ O	Noise dB	Weight kg
UF15P11-H	115V	50	32	0.43	0.51	2750	4.8	170	10.5	0.42	50	0.9
		60	28	0.36	0.45	3100	5.5	195	9.5	0.38	55	
UF15P23-H	230V	50	35	0.23	0.29	2750	4.8	170	10.5	0.42	50	0.9
		60	30	0.18	0.25	3100	5.5	195	9.5	0.38	55	

AC TUBE AXIAL FAN

GENERAL DATA

Model No : UF15P Series

Size : 172 * 150 * 51 (Unit : mm)

Operating Temperature : Ball Bearing : -40℃ ~ 70℃

Life Expectancy : Ball Bearing : over 40,000hr. (At40℃)

Protection : Impedance Protection

Motor : Shaded Pole

Frame : Aluminum die-casting

Impeller : Plastic PBT PC

Safety Approval : UL , CE , TUV

Insulation Resistance : Above 100MΩ , DC500V

Dielectric withstand voltage : AC 1500V (50/60Hz) one minute

Connection : Lead wire or Terminal type

Insulation Class : B class (Temperature Rating : 130℃)

Feature :

RoHS COMPLIANT

MADE IN TAIWAN (FULLTECH ELECTRIC CO., LTD.)