



The connector which attaches the card to the computer main board.

Sheet: /Connector/ File: Connector.sch		
<b>Title:</b>		
Size: A4	Date:	Rev:
KiCad E.D.A. kicad (5.1.0-0)		Id: 2/7

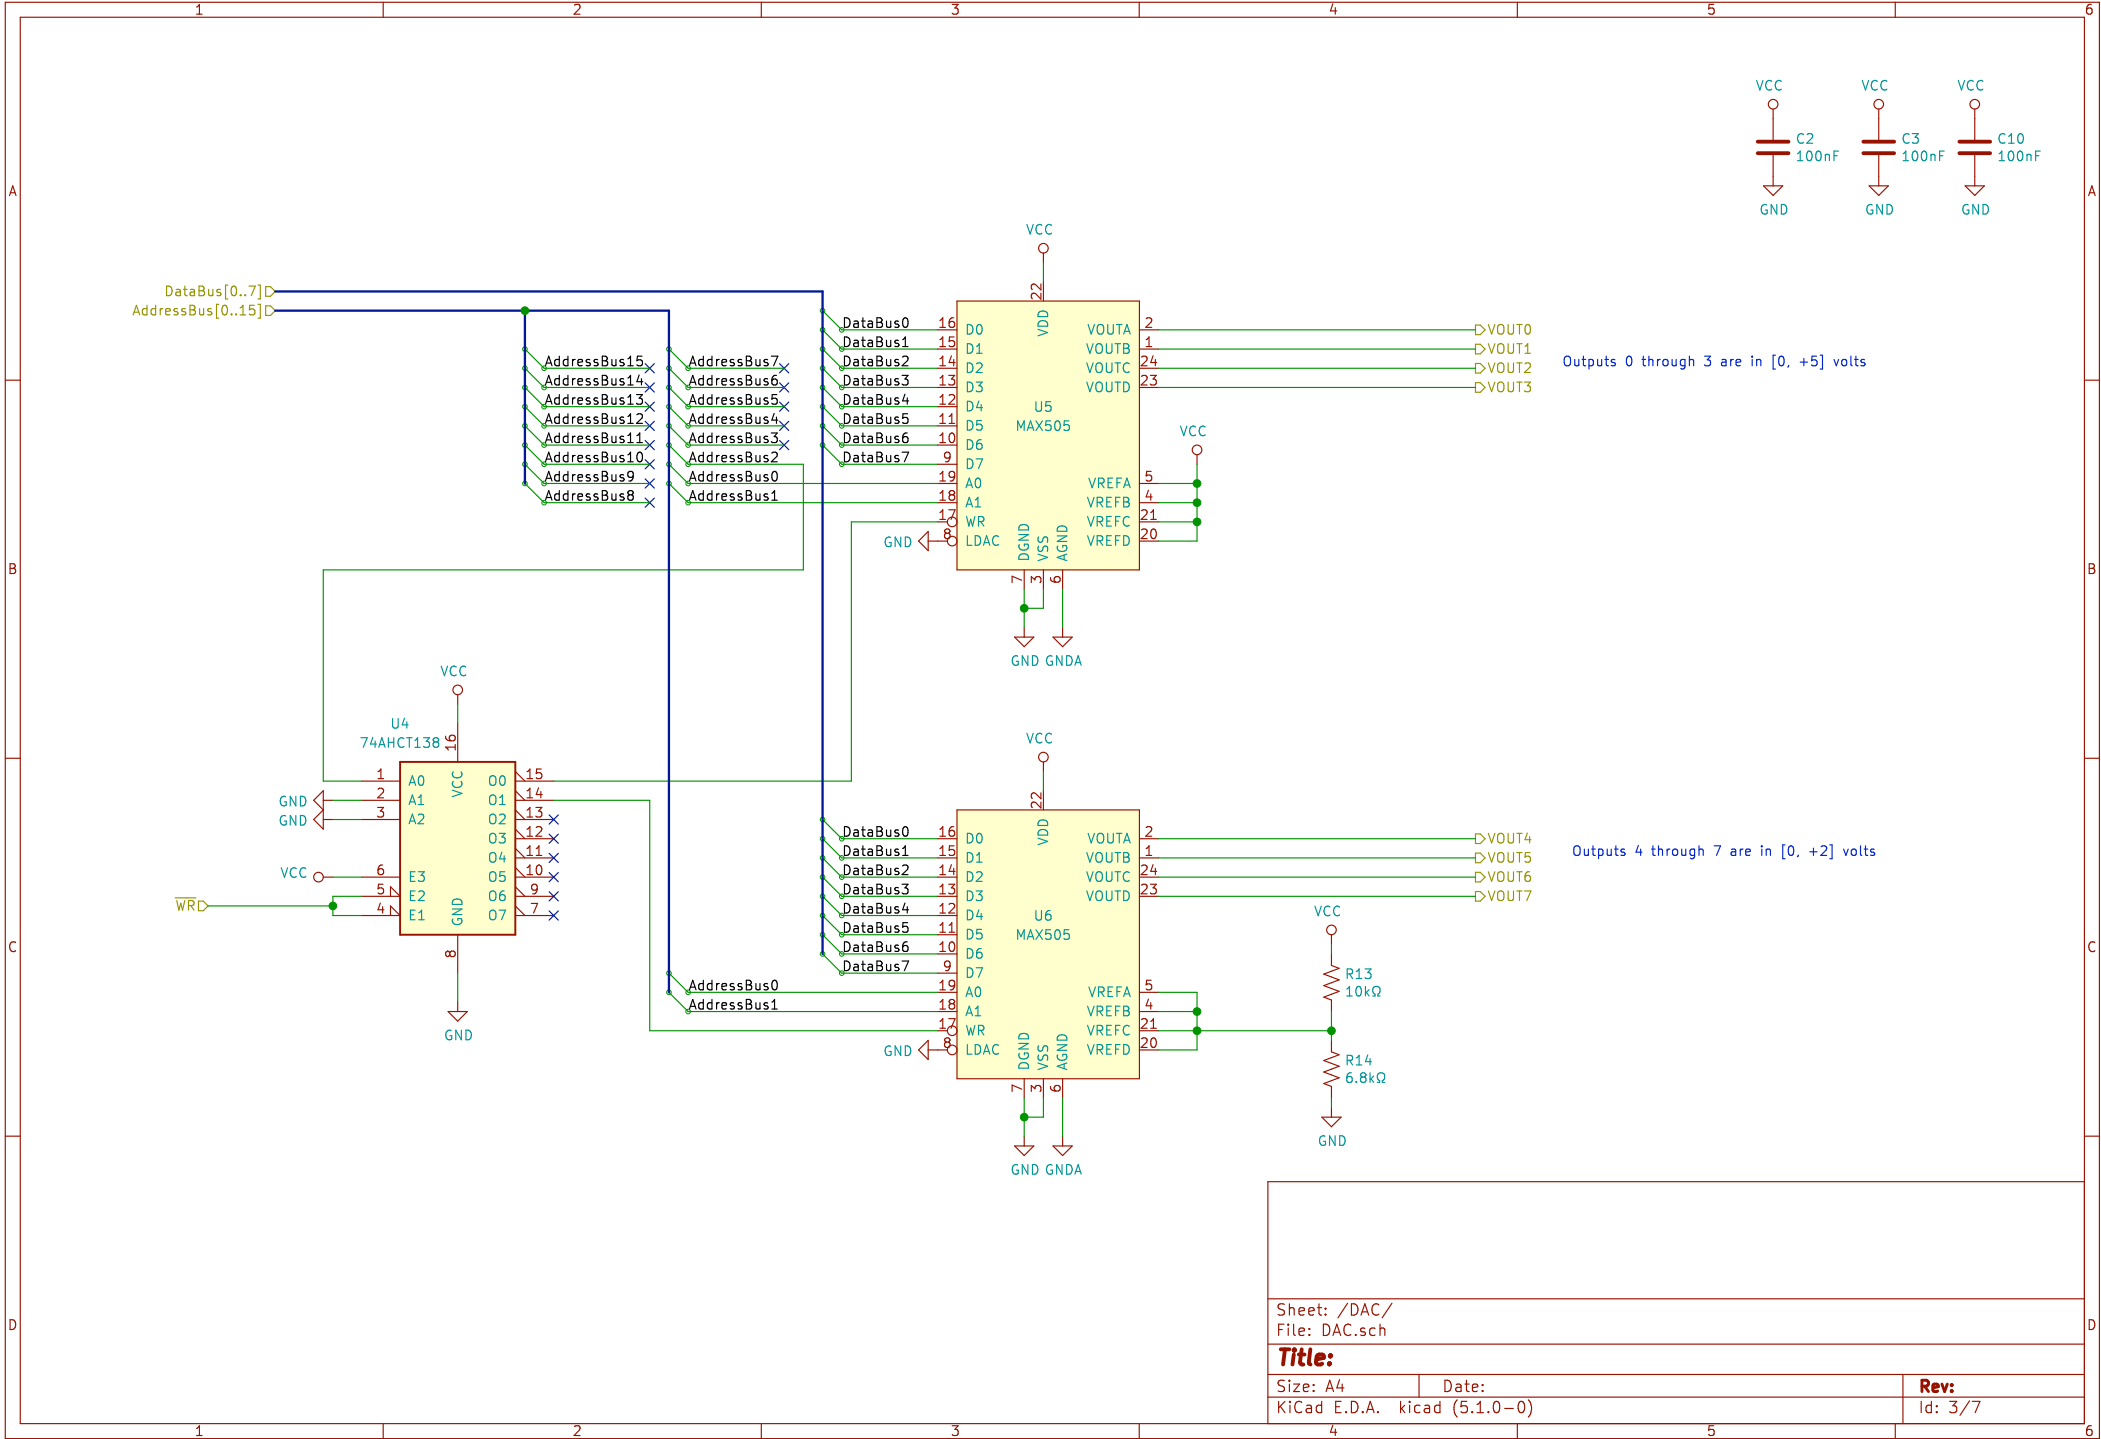

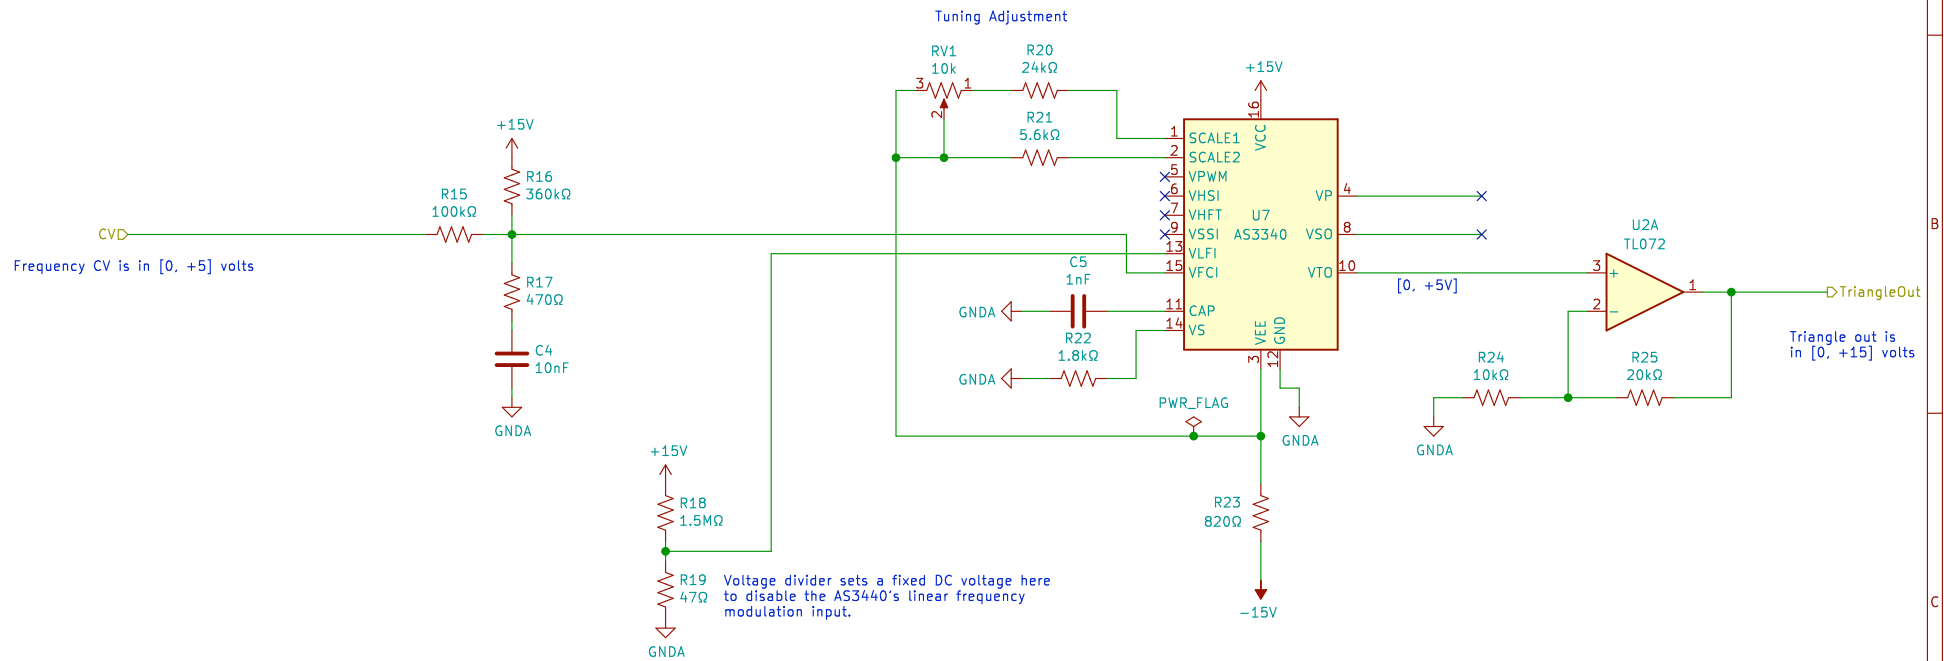

Sheet: /VCO-Triangle/  
File: VCO-Triangle.sch

**Title:**


Size: A4

Date:


KiCad E.D.A. kicad (5.1.0-0)

**Rev:**

Id: 4/7

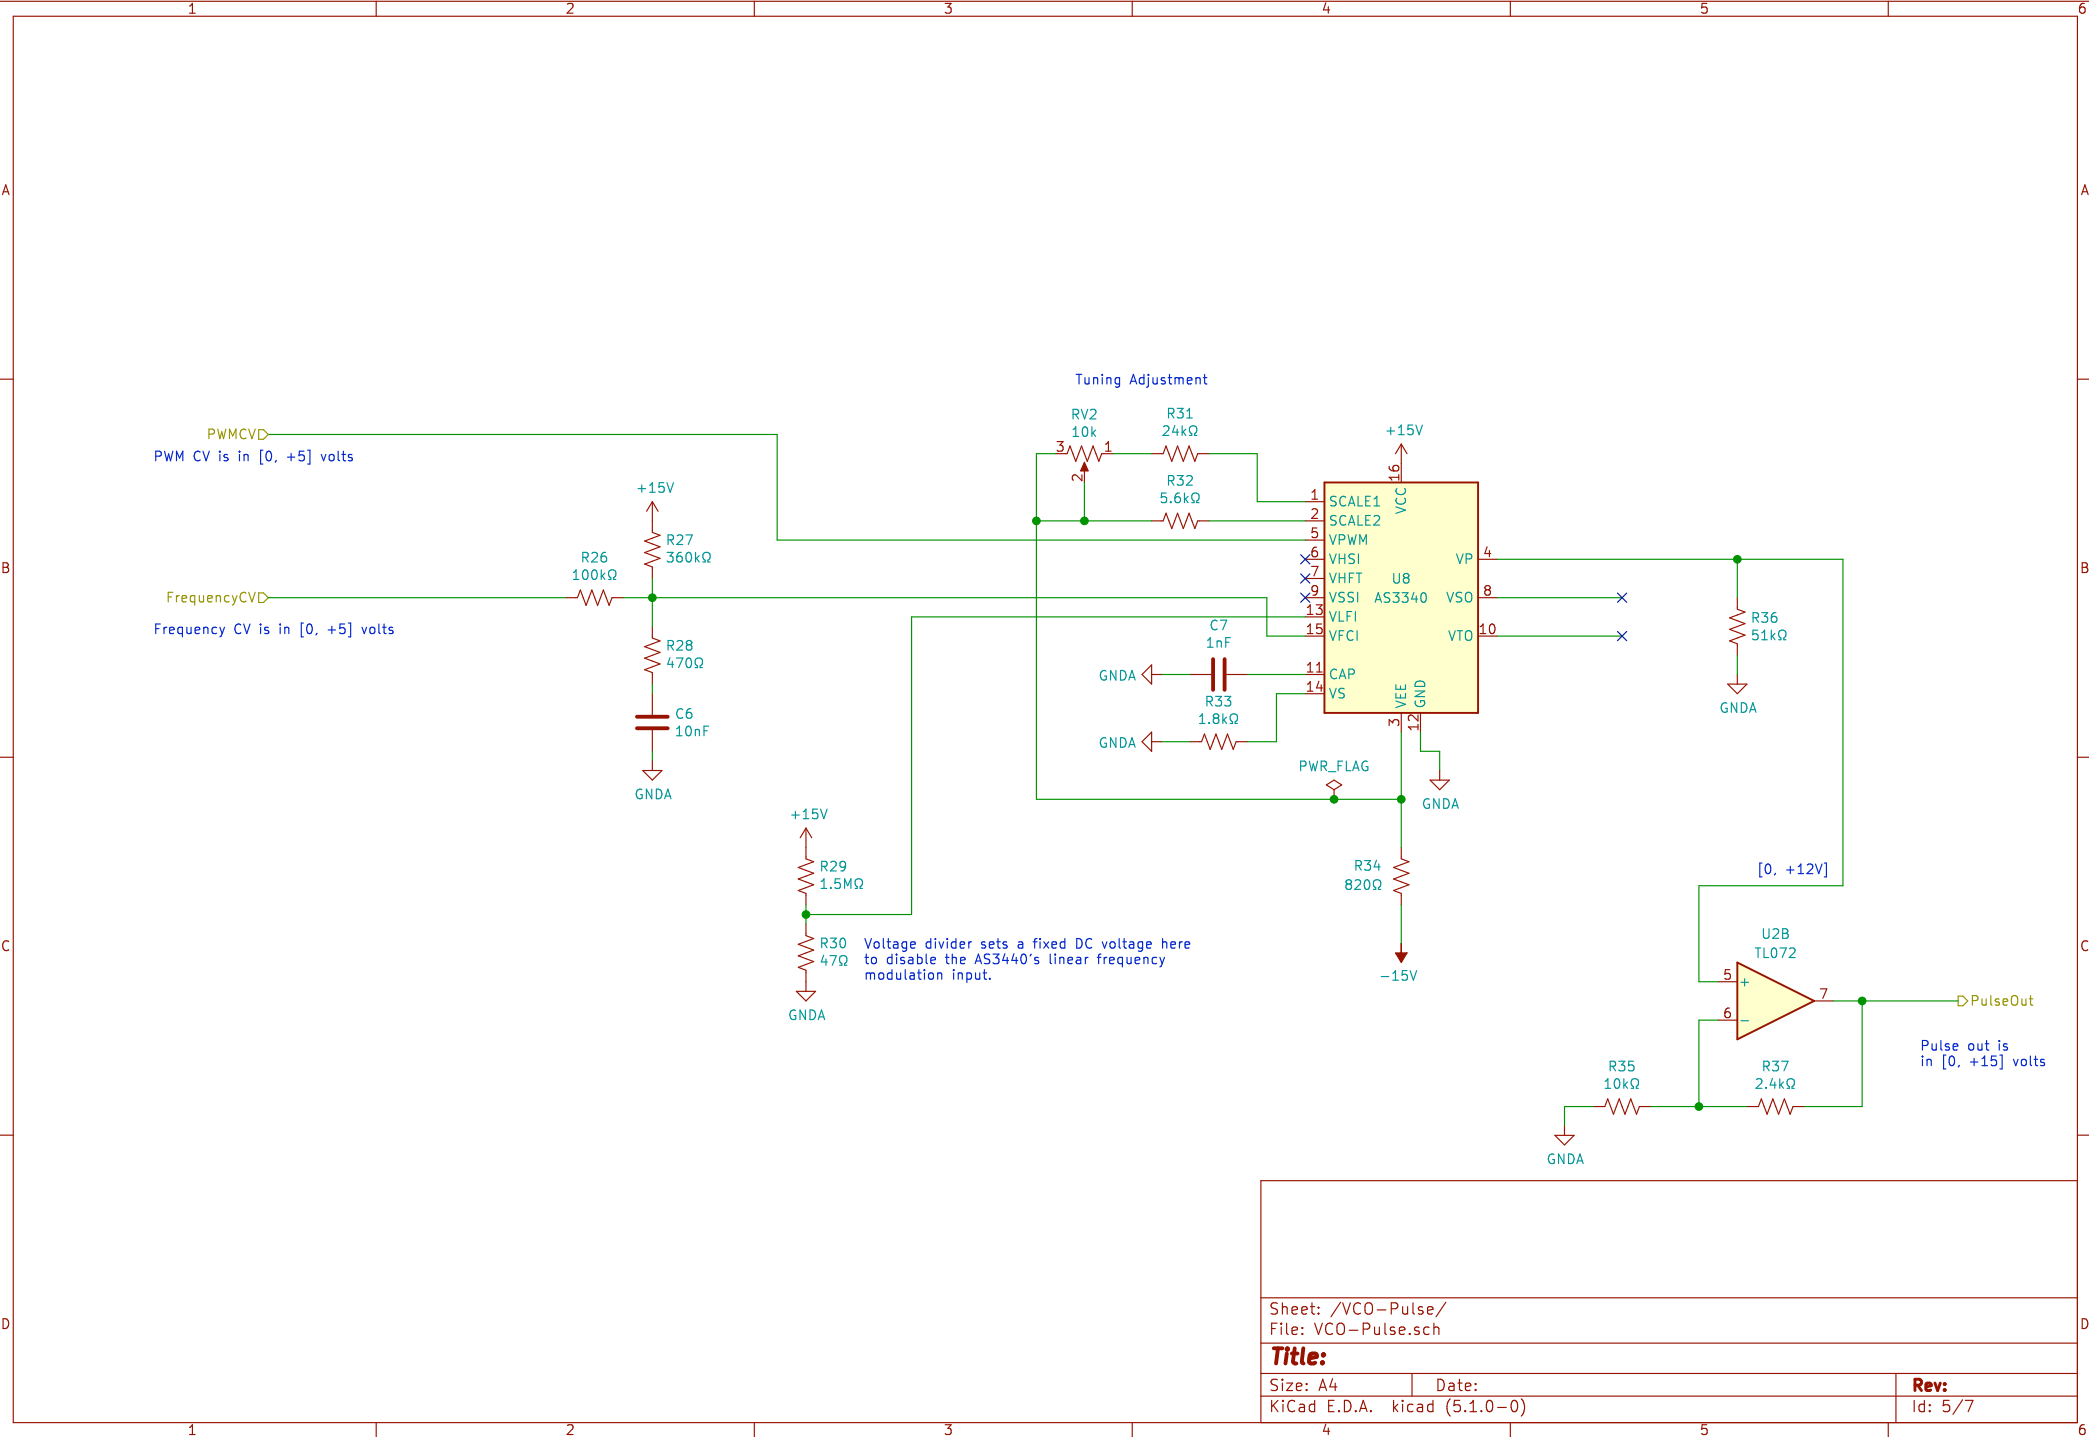


VIN1 needs 47k series resistor  
before entering this subcircuit.

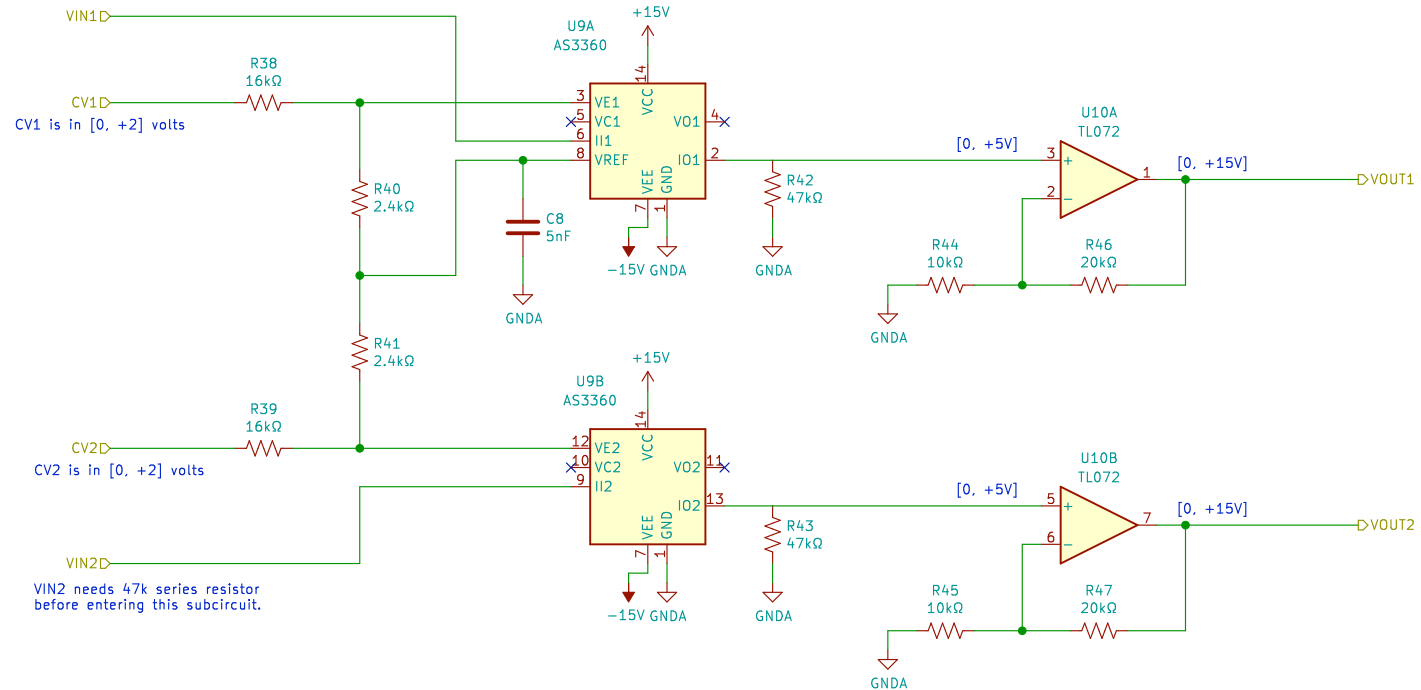

Voltage-controlled amplifier based on the AS3360		
Sheet: /VCA/		
File: VCA.sch		
Title: VCA		
Size: A4	Date:	Rev:
KiCad E.D.A. kicad (5.1.0-0)		Id: 6/7

VIN1 needs 47k series resistor  
before entering this subcircuit.

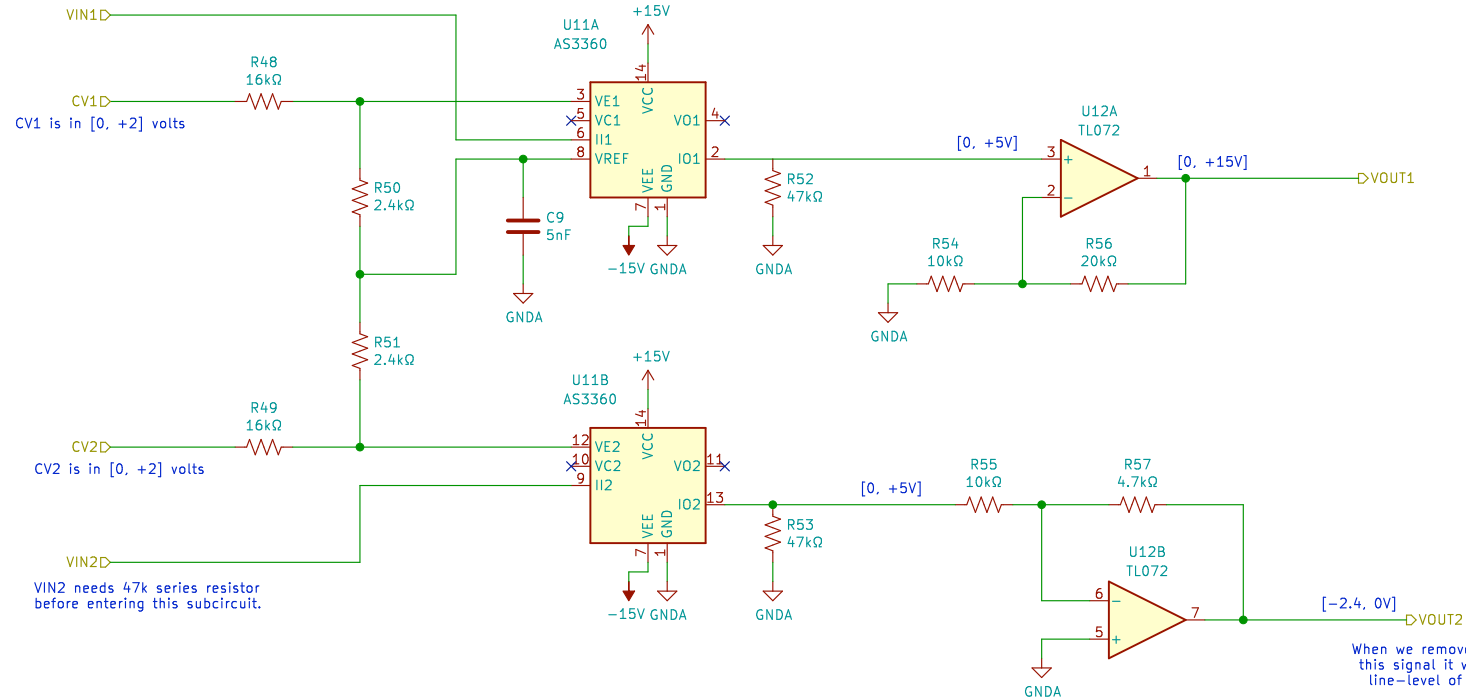

The second dual VCA in the sound card.  
The output levels on VOUT2 are tailored to be easy to shift to line-level.

Sheet: /VCA2/  
File: VCA2.sch

**Title:**

Size: A4  
KiCad E.D.A. kicad (5.1.0-0)

Date:

**Rev:**  
Id: 7/7