


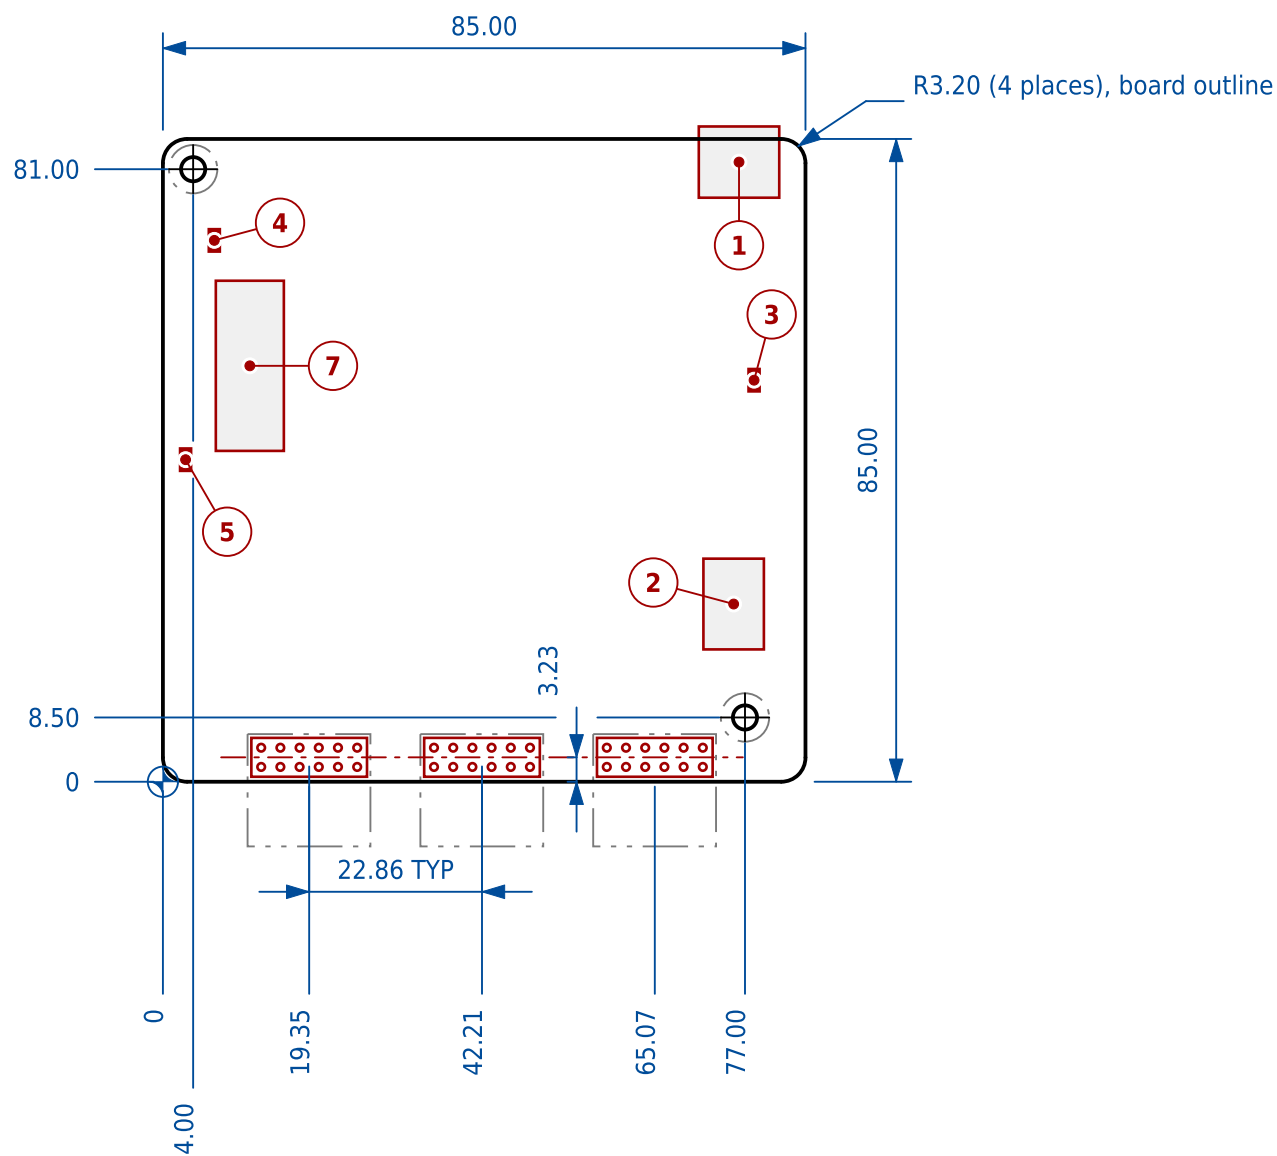

NOTES

- Viewed from the component side.
- Hole IDs are the KiCad reference designators.
- Not in Tiny Tapeout's board revision spreadsheet, so no shuttle or kit is known to have shipped on it; the name follows the v3.2 ID.
- Pmod host pitch, 22.86 mm (0.9 in), is the Digilent Pmod Interface Specification 1.2.0 figure and is the same on every revision; the mounting plate, TT-MP-PLATE, registers against it.
- Assembled envelope, connector overhang included: 85.00 x 86.65 mm.

SOURCES

- KiCad board file: <https://github.com/TinyTapeout/tt-demo-pcb> tinytapeout-demo.kicad_pcb @ ecb636ace - title block: Tiny Tapeout Demoboard v3 rev 3.3, dated 2026-06-23
- Shuttle mapping: <https://mith.ro/tt-demoboards/> - no row: this revision is not in the board revision spreadsheet, so no shuttle is recorded for it.

HOLE SCHEDULE

ID	X mm	Y mm	DIA mm	KEEPOUT mm
MT1	4.00	81.00	3.20	6.40
MT2	77.00	8.50	3.20	6.40

PMOD HOST HEADERS

PORT	REF	EDGE	CX mm	CY mm	PIN1 X mm	PIN1 Y mm
INPUT	J11	bottom	19.350	3.230	25.700	4.500
BIDIR	J12	bottom	42.210	3.230	48.560	4.500
OUTPUT	J13	bottom	65.070	3.230	71.420	4.500

FEATURE SCHEDULE

#	FEATURE	X EXTENT mm	Y EXTENT mm
1	USB-C power / control	70.89 to 81.53	77.23 to 86.65
2	7-segment display	71.50 to 79.50	17.50 to 29.50
3	LED D3	77.47 to 78.93	51.62 to 54.58
4	LED D4	6.07 to 7.53	70.11 to 73.07
5	LED D5	2.27 to 3.73	41.11 to 44.07
6	Fourth indicator LED - not on this board	-	-
7	8-way input DIP switch	7.00 to 16.00	43.75 to 66.25
8	Second DIP switch - not on this board	-	-
9	Side Pmod, first position - not on this board	-	-
10	Side Pmod, second position - not on this board	-	-
11	Side Pmod, third position - not on this board	-	-

LEGEND

- Board outline
- Component body, scheduled
- Pmod connector body, hole keep-out
- Dimension, extension and leader

DB ETR V3.3

tinytapeout-demo rev 3.3

DRAWN generated		VERSION v0.0-164-g0fb4543		UNITS mm		SCALE 1:1	
SIZE A3	SHEET 1 OF 1		DRAWING NO TT-DB-V3P3				REV A
MATERIAL PCB, 1.6 nominal			GENERAL TOLERANCE edge +/-0.20 hole pos +/-0.10 hole dia +/-0.08				