


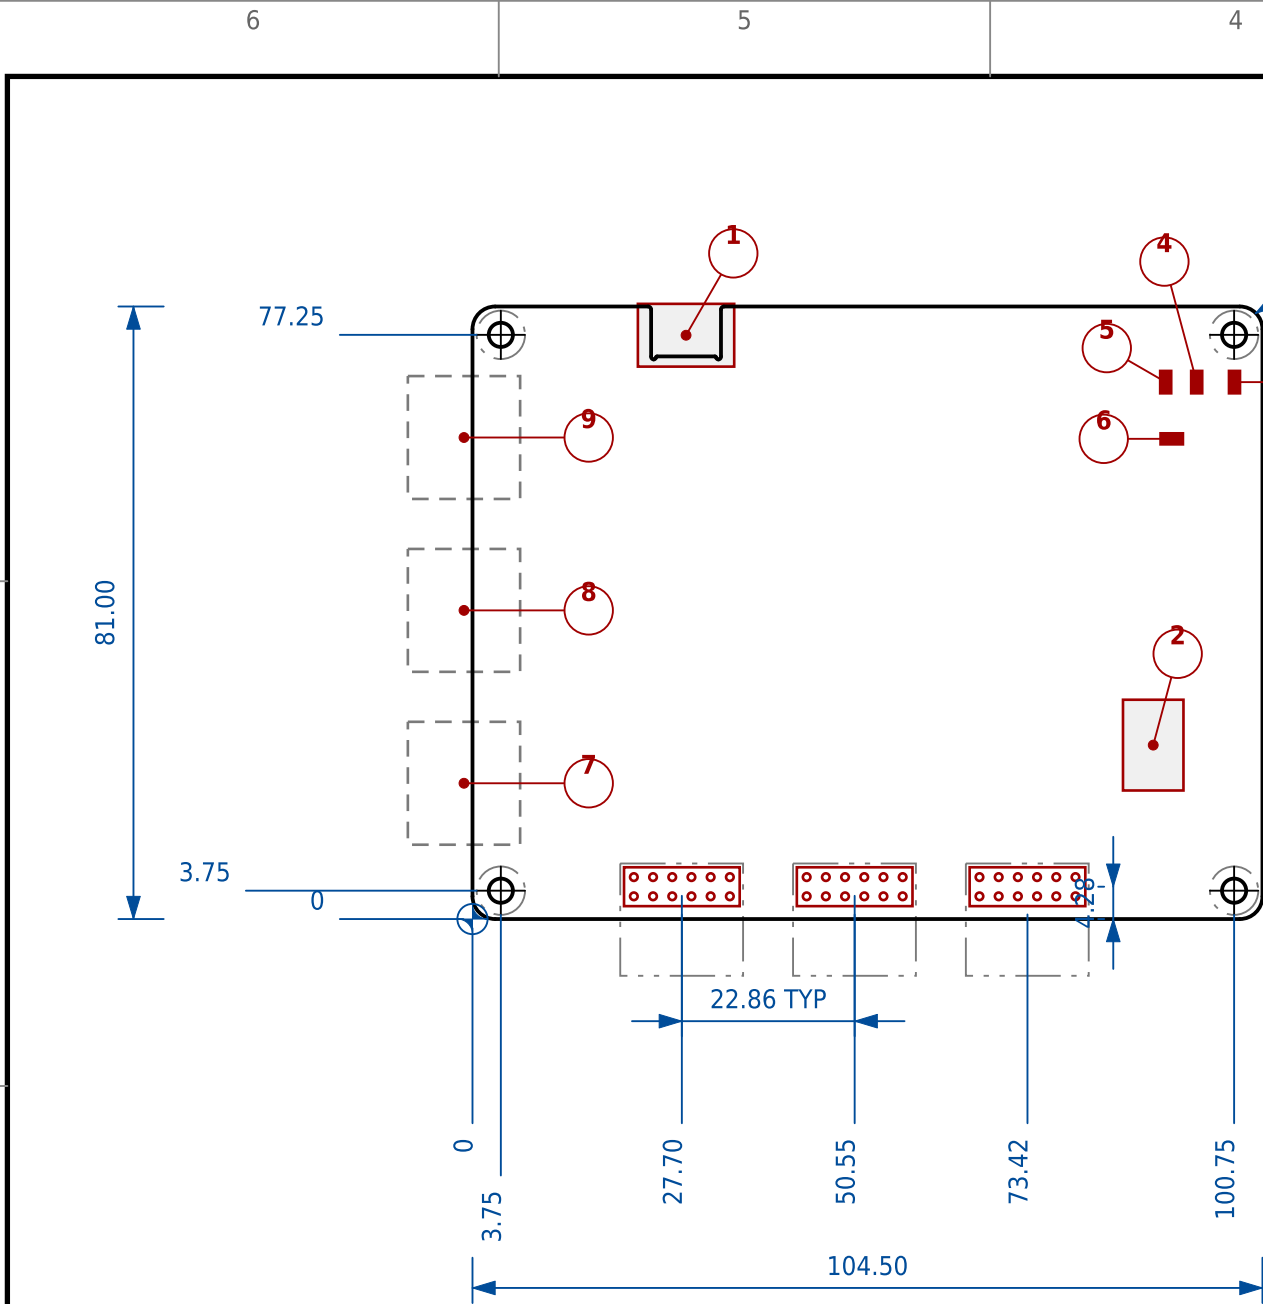

## NOTES

1. All dimensions in millimetres. The datum symbol marks the origin: the lower-left corner of the board outline, X right, Y up, viewed from the component side.
2. Geometry is design nominal, read from the KiCad board file.
3. Hole IDs are the board's own reference designators, taken from the KiCad file, not assigned by this drawing. They are not in any particular positional order.
4. Geometrically identical to revision v1.2.2: the outline, mounting holes, Pmod hosts and every feature on this sheet are in the same place. Only the electrical design and the shuttle differ.
5. Pmod host headers are on a 22.86 mm (0.9 in) pitch, per the Digilent Pmod Interface Specification 1.2.0.

## NOTES (continued)

6. The Pmod host headers along the lower edge are what a mounting plate has to register against. Their 22.86 mm pitch is identical on every Tiny Tapeout demo board revision, but their distance from the lower board edge and their absolute position along it are not.
7. Upper edge carries a shallow recess for the USB-C shell, contributed by the connector footprint's own edge cuts (fillet radii 0.136 mm, 0.303 mm, 0.364 mm, 0.4 mm).

## SOURCES

1. KiCad board file: [https://github.com/TinyTapeout/tt-demo-pcb/tinytapeout-demo.kicad\\_pcb](https://github.com/TinyTapeout/tt-demo-pcb/tinytapeout-demo.kicad_pcb) @ a88cbc08b - title block: TinyTapeout 4+ Demoboard rev 1.2.3, dated 2024-06-11
2. Shuttle mapping: <https://github.com/TinyTapeout/tt-demo-pcb/blob/main/doc/historic/README.md> - used by: TT05

## HOLE SCHEDULE

| ID  | X mm   | Y mm  | DIA mm | KEEPOUT mm |
|-----|--------|-------|--------|------------|
| MT1 | 3.75   | 3.75  | 3.20   | 6.40       |
| MT2 | 100.75 | 3.75  | 3.20   | 6.40       |
| MT3 | 3.75   | 77.25 | 3.20   | 6.40       |
| MT4 | 100.75 | 77.25 | 3.20   | 6.40       |

## PMOD HOST HEADERS

| PORT   | REF | EDGE   | CX mm  | CY mm | PIN1 X mm | PIN1 Y mm |
|--------|-----|--------|--------|-------|-----------|-----------|
| INPUT  | J3  | bottom | 27.695 | 4.275 | 34.045    | 5.545     |
| BIDIR  | J5  | bottom | 50.555 | 4.275 | 56.905    | 5.545     |
| OUTPUT | J6  | bottom | 73.415 | 4.275 | 79.765    | 5.545     |

## FEATURE SCHEDULE

| # | FEATURE                    | X EXTENT mm      | Y EXTENT mm    |
|---|----------------------------|------------------|----------------|
| 1 | USB-C power / control      | 21.88 to 34.62   | 73.05 to 81.35 |
| 2 | 7-segment display          | 86.05 to 94.05   | 17.00 to 29.00 |
| 3 | LED D1                     | 100.07 to 101.53 | 69.52 to 72.48 |
| 4 | LED D2                     | 95.07 to 96.53   | 69.52 to 72.48 |
| 5 | LED D3                     | 90.97 to 92.43   | 69.52 to 72.48 |
| 6 | LED D4                     | 91.02 to 93.98   | 62.77 to 64.23 |
| 7 | Side Pmod J12 (not fitted) | -8.55 to 6.30    | 9.83 to 26.08  |
| 8 | Side Pmod J13 (not fitted) | -8.55 to 6.30    | 32.69 to 48.94 |
| 9 | Side Pmod J14 (not fitted) | -8.55 to 6.30    | 55.55 to 71.80 |

## TINY TAPEOUT 4+ DEMO BOARD

tinytapeout-demo rev 1.2.3

|                 |            |                                                |       |
|-----------------|------------|------------------------------------------------|-------|
| DRAWN           | DATE       | UNITS                                          | SCALE |
| generated       | 2026-09-10 | mm                                             | 1:1   |
| SIZE            | SHEET      | DRAWING NO                                     | REV   |
| A3              | 1 OF 1     | TT-DB-03                                       | A     |
| MATERIAL        |            | GENERAL TOLERANCE                              |       |
| PCB, 1.56 thick |            | edge +/-0.20 hole pos +/-0.10 hole dia +/-0.08 |       |