

1

2

3

4

5

6

A

B

C

D

A

B

C

D

ENVELOPE


DIMENSION	mm
Overall length	102.50
Overall width	29.60
Overall height	24.80

FEATURES (PLAN VIEW)

FEATURE	X EXTENT mm	Y EXTENT mm
RJ45 PoE input, in the end plate	86.50 to 102.50	6.30 to 23.30
Output cable exit	0.00 to 3.00	11.80 to 17.80

LEGEND

- Body envelope
- Aperture or cable exit
- Dimension, extension and leader

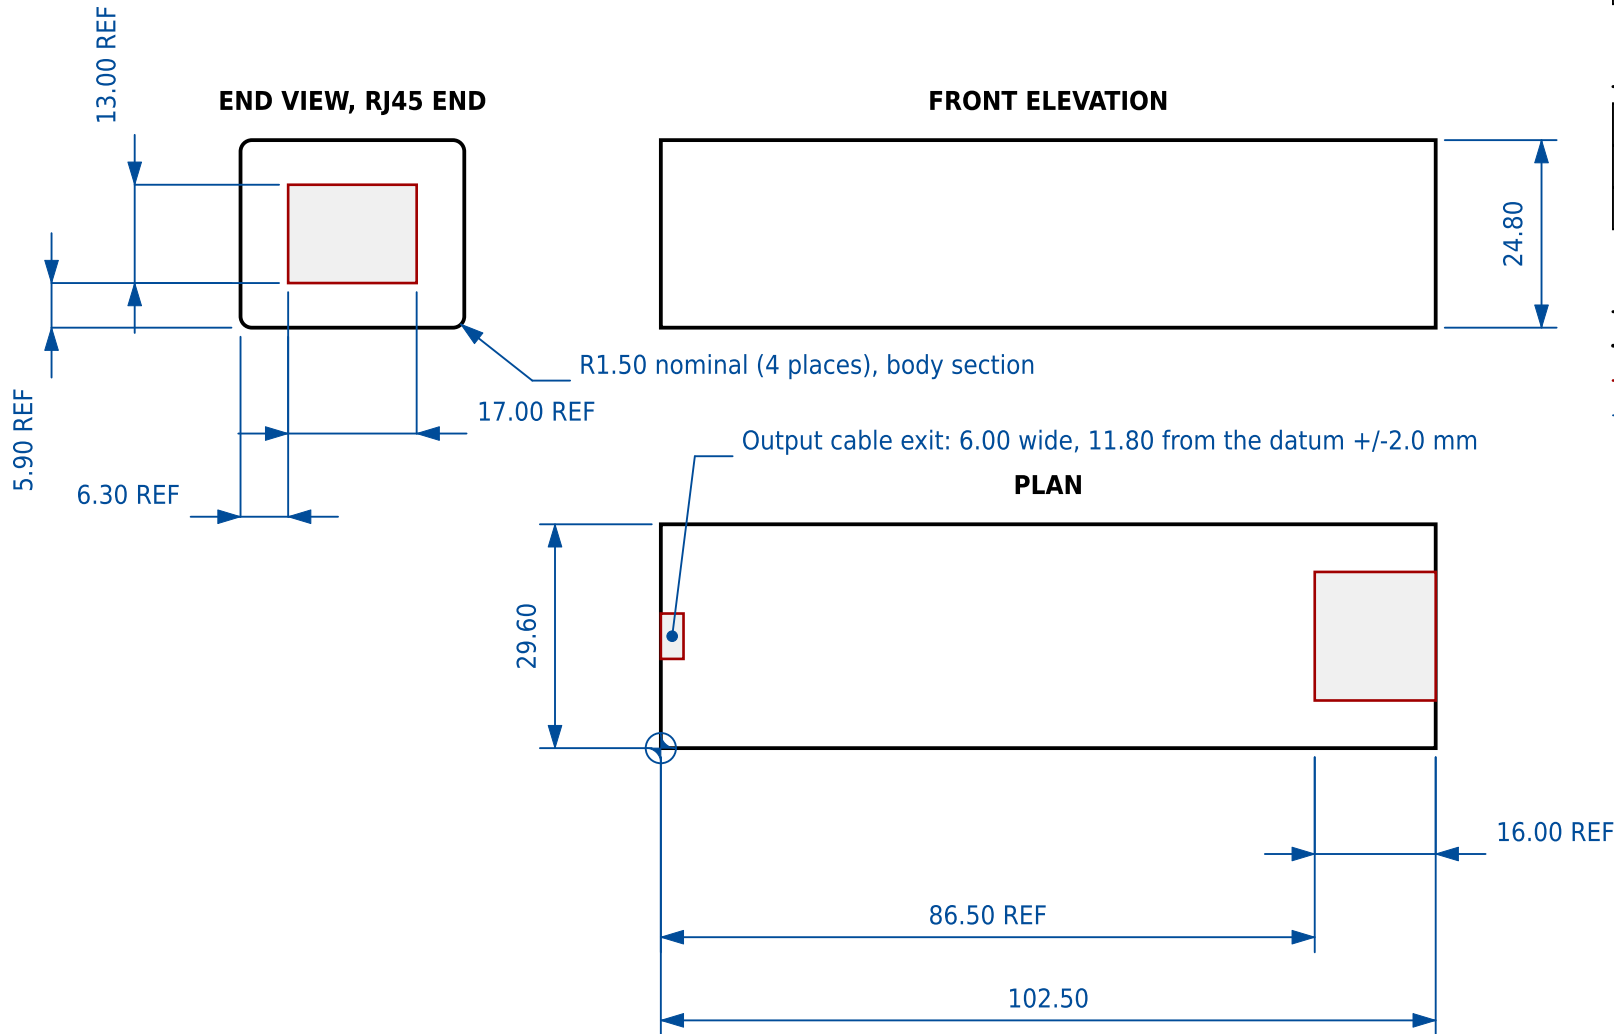

NOTES

- Origin at the datum on the plan: X along the length, Y across the width, Z up.
- Dimensions marked REF are scaled from vendor photographs, good to about +/-1.5 mm, and are not for inspection. The RJ45 aperture is a standard 8P8C envelope placed centrally, as the vendor does not dimension it.
- Output is a USB-C male plug on a captive lead from the cable exit, not a receptacle. Lead length is not published; allow for the plug and its bend radius.
- No mounting holes: a bracket has to clamp or strap the body. The end-plate corner screws are not published.
- Finned extrusion; the fins are not drawn and the outline is the overall envelope.

SOURCES

- Product page:
<https://www.waveshare.com/poe-splitter-25w-type-c.htm> - Specification table: "DIMENSIONS 102.5 x 29.6 x 24.8mm (L x W x H)"; "POE INPUT VOLTAGE 37V ~ 57V"; "POWER OUTPUT 5V 5A (MAX)"; IEEE 802.3af/at.
- Dimension drawing:
<https://www.waveshare.com/img/devkit/accBoard/POE-SPLITTER-25W-TYPE-C/POE-SPLITTER-25W-TYPE-C-details-size.jpg> - Annotated 102.50 / 29.60 / 24.80, unit mm, matching the specification table.

WAVESHARE POE SPLITTER 25 W, TYPE-C

POE-SPLITTER-25W-TYPE-C, extruded aluminium body

DRAWN generated	VERSION v0.0-160-g6011fbd	UNITS mm	SCALE 1:1
SIZE A3	SHEET 1 OF 1	DRAWING NO ACC-WAVESHARE-POE-USBC	REV A
MATERIAL aluminium extrusion	GENERAL TOLERANCE envelope +/-1.0 unless noted		PROJECTION

1

2

3

4

5

6