


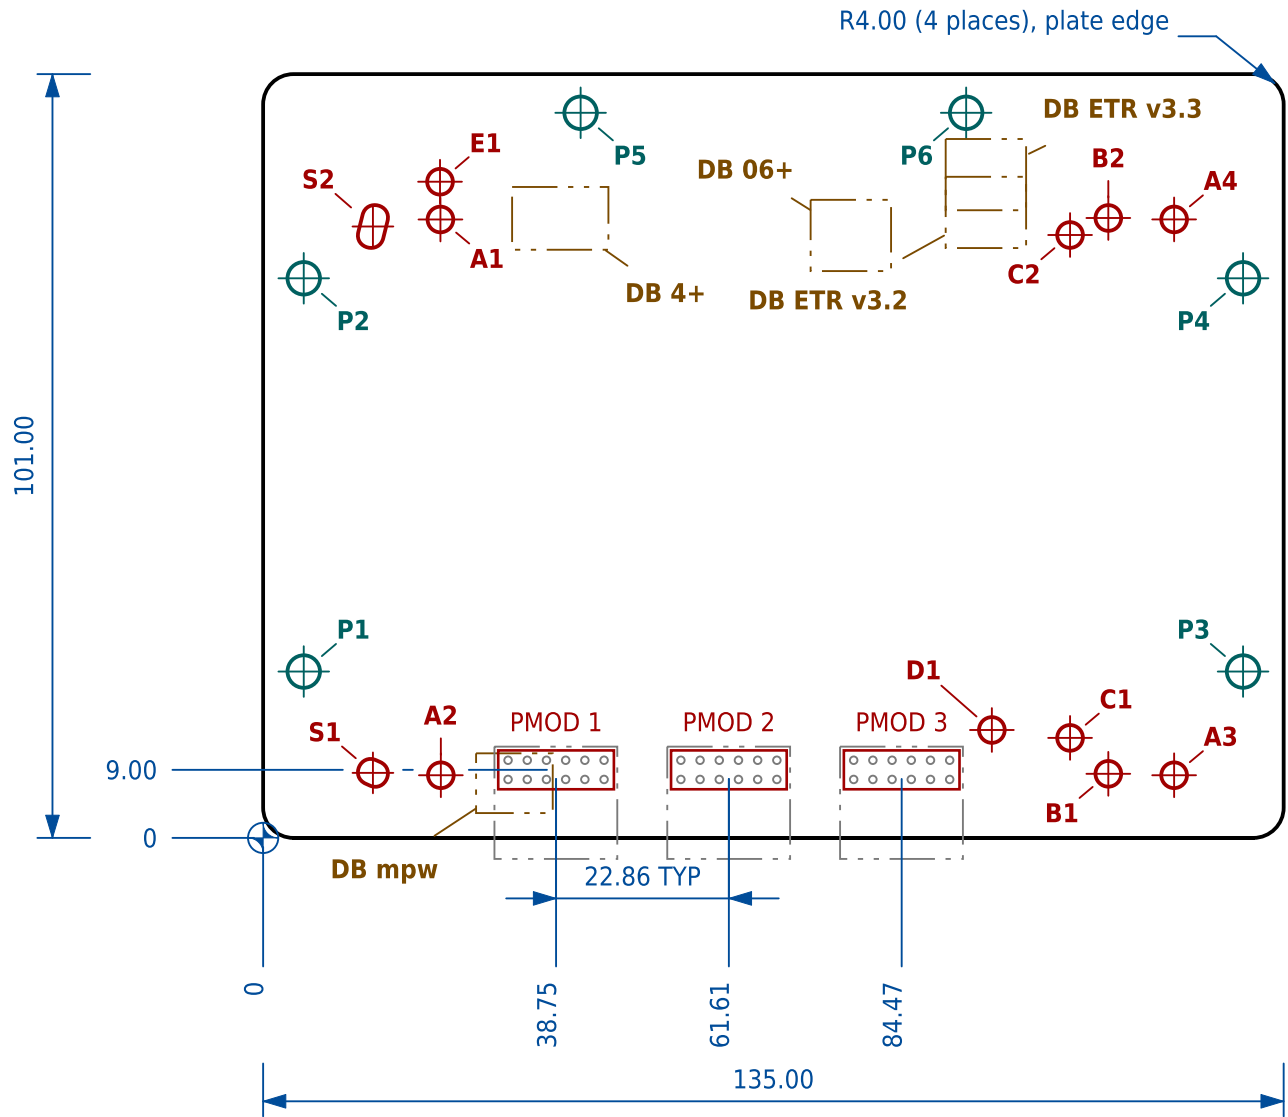

BOARD MOUNTING HOLES

ID	X mm	Y mm	DIA/WIDTH mm	LENGTH mm	USED BY
A1	23.45	81.78	3.40	-	DB mpw:MT3, DB ETR v3.2:MT1
A2	23.51	8.29	3.40	-	DB mpw:MT1
A3	120.51	8.29	3.40	-	DB mpw:MT2
A4	120.51	81.78	3.40	-	DB mpw:MT4
B1	111.81	8.47	3.40	-	DB 4+:MT2
B2	111.81	81.97	3.40	-	DB 4+:MT4
C1	106.75	13.22	3.40	-	DB 06+:MT2
C2	106.75	79.72	3.40	-	DB 06+:MT4
D1	96.40	14.27	3.40	-	DB ETR v3.2:MT2, DB ETR v3.3:MT2
E1	23.40	86.77	3.40	-	DB ETR v3.3:MT1
S1	14.24 / 14.80	8.72 / 8.47	3.40	4.01	DB 4+:MT1, DB 06+:MT1
S2	14.24 / 14.80	79.72 / 81.97	3.40	5.72	DB 4+:MT3, DB 06+:MT3

PLATE FIXING HOLES

ID	X mm	Y mm	DIA mm
P1	5.37	22.00	4.30
P2	5.37	74.00	4.30
P3	129.63	22.00	4.30
P4	129.63	74.00	4.30
P5	42.00	95.89	4.30
P6	93.00	95.89	4.30

LEGEND

	Plate edge
	Hole or slot for a demo board fastener
	Plate fixing, into the chassis
	Slot axis
	Pmod host pin field, where a board's hosts land
	Pmod connector body, overhanging the front edge
	USB-C connector, one position per board version
	Dimension, extension and leader

NOTES

- Viewed from the side the board mounts on.
- A slot row gives its two end centres; DIA/WIDTH is the slot width and LENGTH its overall length.
- USED BY names the board a feature serves and that board's own hole ID, MT1 to MT4. Drawing TT-MP-02 shows each board on the plate.
- A hole's ID letter is the board it is there for, A DB mpw, B DB 4+, C DB 06+, D DB ETR v3.2, E DB ETR v3.3, numbered within it. S is a slot, P a plate fixing. A feature two boards share keeps one ID.
- PMOD 1 to 3 are not machined features; they mark where every board's Pmod host pin fields land.
- Board holes and slots are 3.4 mm, clearance for M3 standoffs. Plate fixings are 4.3 mm, clearance for M4. A slot serves two boards whose holes are too close together to drill separately.
- Pmod connector bodies overhang the front (lower) edge by 2.78 mm; keep it clear so a peripheral can plug in.

NOTES (continued)

- Cut file: tt-generic-mounting-plate.dxf. Sizes are finished sizes.
- Fit the plate to the chassis before the board: a board overhangs the plate fixings. Thinnest web between features is 1.59 mm, between A1 and E1.

SOURCES

- Derived from: tinytapeout/boards.py - Board outlines, mounting holes and Pmod host positions for every Tiny Tapeout demo board revision, extracted from the upstream KiCad files.
- Pmod host pitch:
https://digilent.com/reference/_media/reference/pmod/pmod-interface-specification-1_2_0.pdf - Digilent mandate .90 in (22.86 mm) between adjacent host ports on a board edge, which is why one plate can serve every revision.

TT GENERIC MOUNTING PLATE

Accepts every demo board revision, Pmod hosts fixed in place

DRAWN	VERSION	UNITS	SCALE
generated	v0.0-107-g15a87ba	mm	1:1
SIZE	SHEET	DRAWING NO	REV
A3	1 OF 2	TT-MP-01	A
MATERIAL		GENERAL TOLERANCE	
3 mm acrylic or 1.6 mm FR4		edge +/-0.20 hole pos +/-0.10 allow for cutter kerf	