


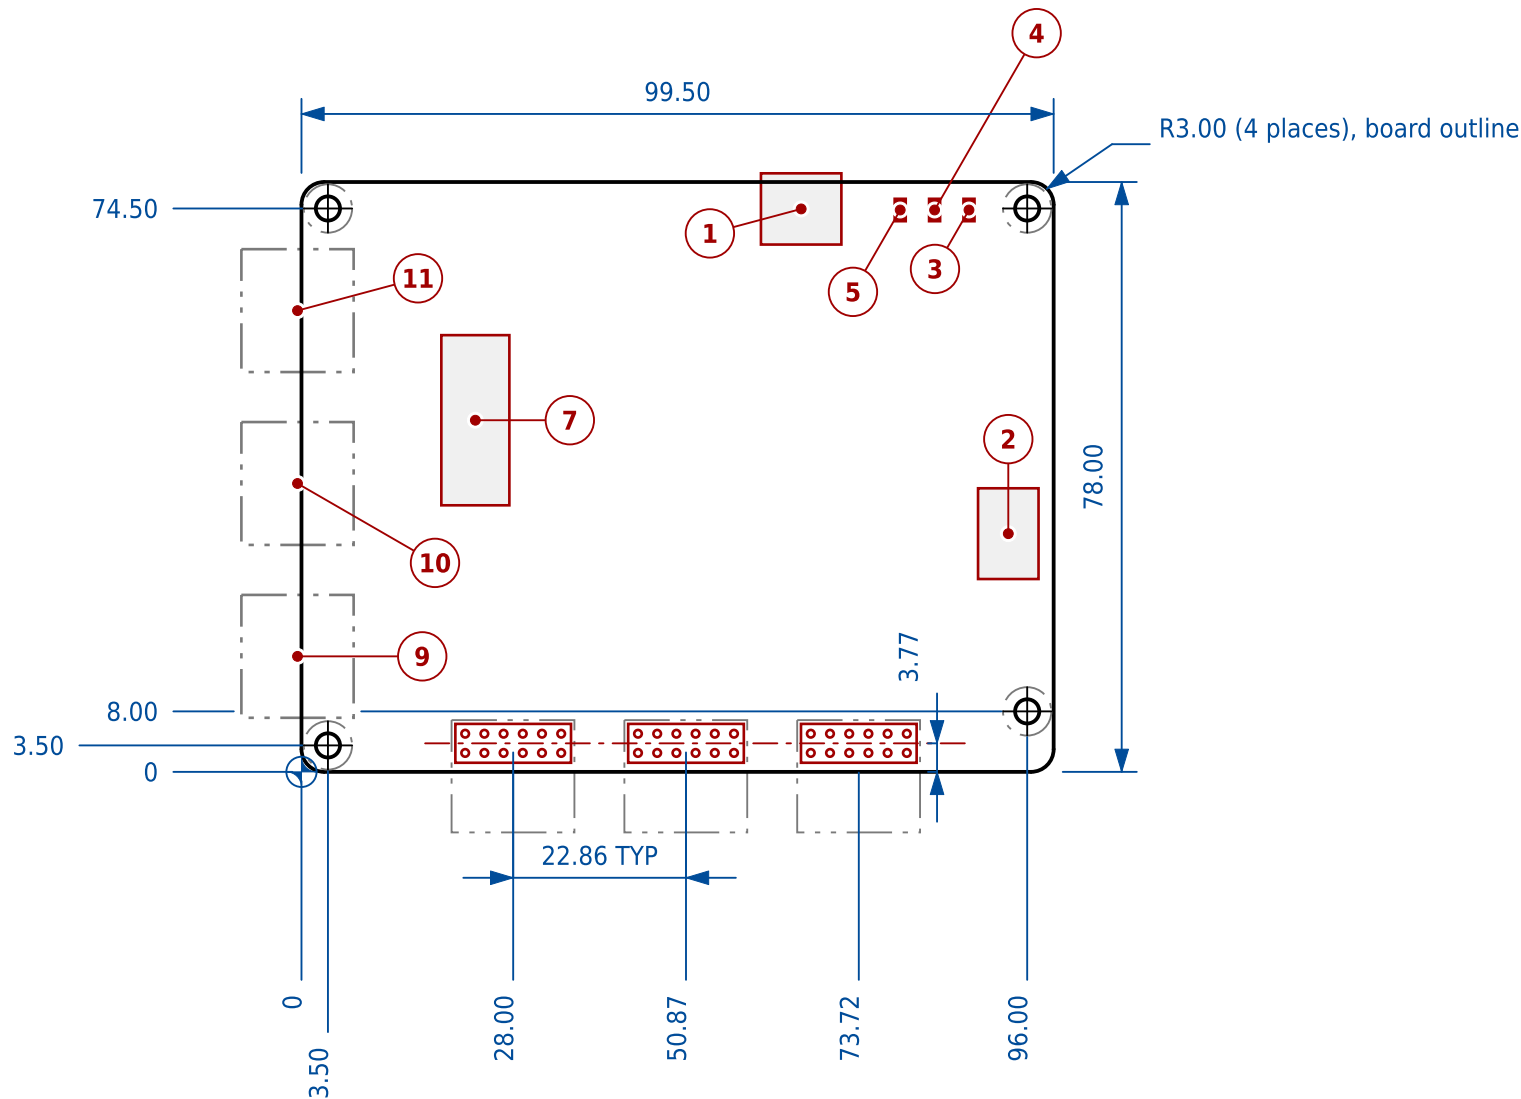

NOTES

1. Viewed from the component side.
2. Ships in TT08 Dev Kit and TT08 Dev Kit - CoB edition.
3. Hole IDs are the KiCad reference designators.
4. Pmod host pitch, 22.86 mm (0.9 in), is the Digilent Pmod Interface Specification 1.2.0 figure and is the same on every revision; the mounting plate, TT-MP-01, registers against it.
5. Assembled envelope, connector overhang included: 99.50 x 79.15 mm.

SOURCES

1. KiCad board file: <https://github.com/TinyTapeout/tt-demo-pcb> tinytapeout-demo.kicad_pcb @ 028a51b1e - title block: TinyTapeout 06+ Demoboard rev 2.1.2, dated 2025-02-11
2. Shuttle mapping: https://docs.google.com/spreadsheets/d/1xD_uemuQcpUnXRY4twOrFzF0urJLVWMDqAnrOJLetM/edit?gid=1250963370 - row "DB 06+ v2.1.2", Used by: TT08.

HOLE SCHEDULE

ID	X mm	Y mm	DIA mm	KEEPOUT mm
MT1	3.50	3.50	3.20	6.40
MT2	96.00	8.00	3.20	6.40
MT3	3.50	74.50	3.20	6.40
MT4	96.00	74.50	3.20	6.40

PMOD HOST HEADERS

PORT	REF	EDGE	CX mm	CY mm	PIN1 X mm	PIN1 Y mm
INPUT	J3	bottom	28.005	3.775	34.355	5.045
BIDIR	J5	bottom	50.865	3.775	57.215	5.045
OUTPUT	J6	bottom	73.725	3.775	80.075	5.045

FEATURE SCHEDULE

#	FEATURE	X EXTENT mm	Y EXTENT mm
1	USB-C power / control	60.78 to 71.42	69.73 to 79.15
2	7-segment display	89.50 to 97.50	25.50 to 37.50
3	LED D1	87.57 to 89.03	72.82 to 75.78
4	LED D2	83.02 to 84.48	72.82 to 75.78
5	LED D3	78.47 to 79.93	72.82 to 75.78
6	Fourth indicator LED - not on this board	-	-
7	8-way input DIP switch	18.50 to 27.50	35.25 to 57.75
8	Second DIP switch - not on this board	-	-
9	Side Pmod J12 (not fitted)	-7.95 to 6.90	7.15 to 23.40
10	Side Pmod J13 (not fitted)	-7.95 to 6.90	30.01 to 46.26
11	Side Pmod J14 (not fitted)	-7.95 to 6.90	52.87 to 69.12

LEGEND

- Board outline
- Component body, scheduled
- Position not fitted on this revision
- Pmod connector body, hole keep-out
- Dimension, extension and leader

DB 06+ V2.1.2

tinytapeout-demo rev 2.1.2

DRAWN	VERSION	UNITS	SCALE
generated	v0.0-107-g15a87ba	mm	1:1
SIZE	SHEET	DRAWING NO	REV
A3	1 OF 1	TT-DB-04	A
MATERIAL		GENERAL TOLERANCE	
PCB, 1.6 nominal		edge +/-0.20 hole pos +/-0.10 hole dia +/-0.08	