


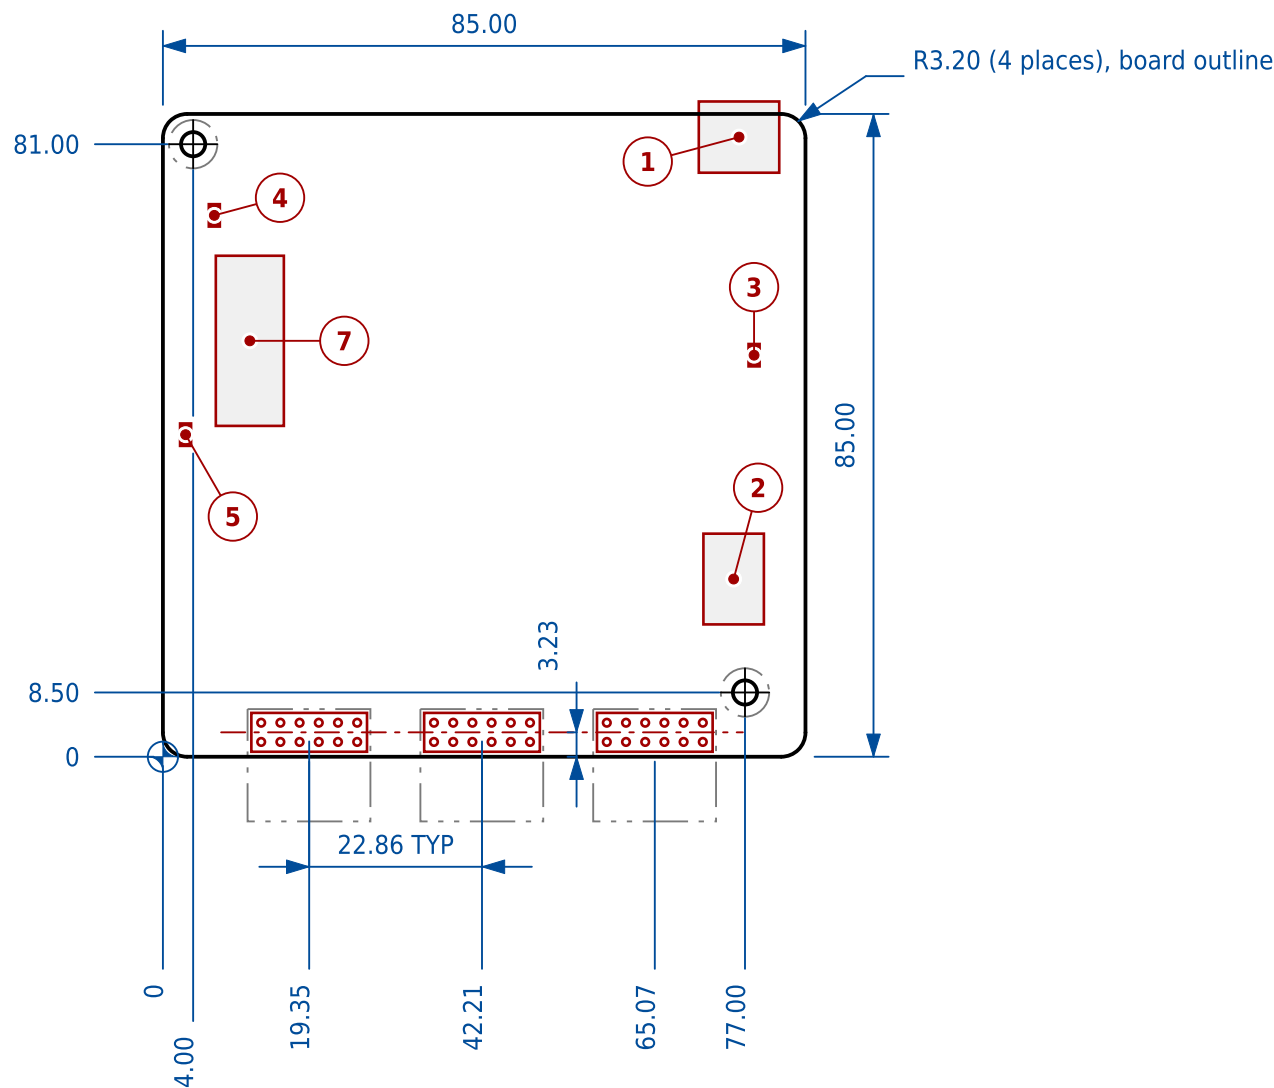

## NOTES

1. Viewed from the component side.
2. Hole IDs are the KiCad reference designators.
3. Not in Tiny Tapeout's board revision spreadsheet, so no shuttle or kit is known to have shipped on it; the name follows the v3.2 ID.
4. Pmod host pitch, 22.86 mm (0.9 in), is the Digilent Pmod Interface Specification 1.2.0 figure and is the same on every revision; the mounting plate, TT-MP-01, registers against it.
5. Assembled envelope, connector overhang included: 85.00 x 86.65 mm.

## SOURCES

1. KiCad board file: <https://github.com/TinyTapeout/tt-demo-pcb> tinytapeout-demo.kicad\_pcb @ ecb636ace - title block: Tiny Tapeout Demoboard v3 rev 3.3, dated 2026-06-23
2. Shuttle mapping: [https://docs.google.com/spreadsheets/d/1xD\\_uemuQcpUnXRY4twOrFzF0urJLVWMDqAnrOJLetM/edit?gid=1250963370](https://docs.google.com/spreadsheets/d/1xD_uemuQcpUnXRY4twOrFzF0urJLVWMDqAnrOJLetM/edit?gid=1250963370) - no row: this revision is not in the board revision spreadsheet, so no shuttle is recorded for it.

## HOLE SCHEDULE

| ID  | X mm  | Y mm  | DIA mm | KEEPOUT mm |
|-----|-------|-------|--------|------------|
| MT1 | 4.00  | 81.00 | 3.20   | 6.40       |
| MT2 | 77.00 | 8.50  | 3.20   | 6.40       |

## PMOD HOST HEADERS

| PORT   | REF | EDGE   | CX mm  | CY mm | PIN1 X mm | PIN1 Y mm |
|--------|-----|--------|--------|-------|-----------|-----------|
| INPUT  | J11 | bottom | 19.350 | 3.230 | 25.700    | 4.500     |
| BIDIR  | J12 | bottom | 42.210 | 3.230 | 48.560    | 4.500     |
| OUTPUT | J13 | bottom | 65.070 | 3.230 | 71.420    | 4.500     |

## FEATURE SCHEDULE

| #  | FEATURE                                        | X EXTENT mm    | Y EXTENT mm    |
|----|------------------------------------------------|----------------|----------------|
| 1  | USB-C power / control                          | 70.89 to 81.53 | 77.23 to 86.65 |
| 2  | 7-segment display                              | 71.50 to 79.50 | 17.50 to 29.50 |
| 3  | LED D3                                         | 77.47 to 78.93 | 51.62 to 54.58 |
| 4  | LED D4                                         | 6.07 to 7.53   | 70.11 to 73.07 |
| 5  | LED D5                                         | 2.27 to 3.73   | 41.11 to 44.07 |
| 6  | Fourth indicator LED - not on this board       | -              | -              |
| 7  | 8-way input DIP switch                         | 7.00 to 16.00  | 43.75 to 66.25 |
| 8  | Second DIP switch - not on this board          | -              | -              |
| 9  | Side Pmod, first position - not on this board  | -              | -              |
| 10 | Side Pmod, second position - not on this board | -              | -              |
| 11 | Side Pmod, third position - not on this board  | -              | -              |

## LEGEND

- Board outline
- Component body, scheduled
- Pmod connector body, hole keep-out
- Dimension, extension and leader

## DB ETR V3.3

tinytapeout-demo rev 3.3

|                                     |                                     |                                                                            |                     |
|-------------------------------------|-------------------------------------|----------------------------------------------------------------------------|---------------------|
| DRAWN<br><b>generated</b>           | VERSION<br><b>v0.0-107-g15a87ba</b> | UNITS<br><b>mm</b>                                                         | SCALE<br><b>1:1</b> |
| SIZE<br><b>A3</b>                   | SHEET<br><b>1 OF 1</b>              | DRAWING NO<br><b>TT-DB-06</b>                                              | REV<br><b>A</b>     |
| MATERIAL<br><b>PCB, 1.6 nominal</b> |                                     | GENERAL TOLERANCE<br><b>edge +/-0.20 hole pos +/-0.10 hole dia +/-0.08</b> |                     |