


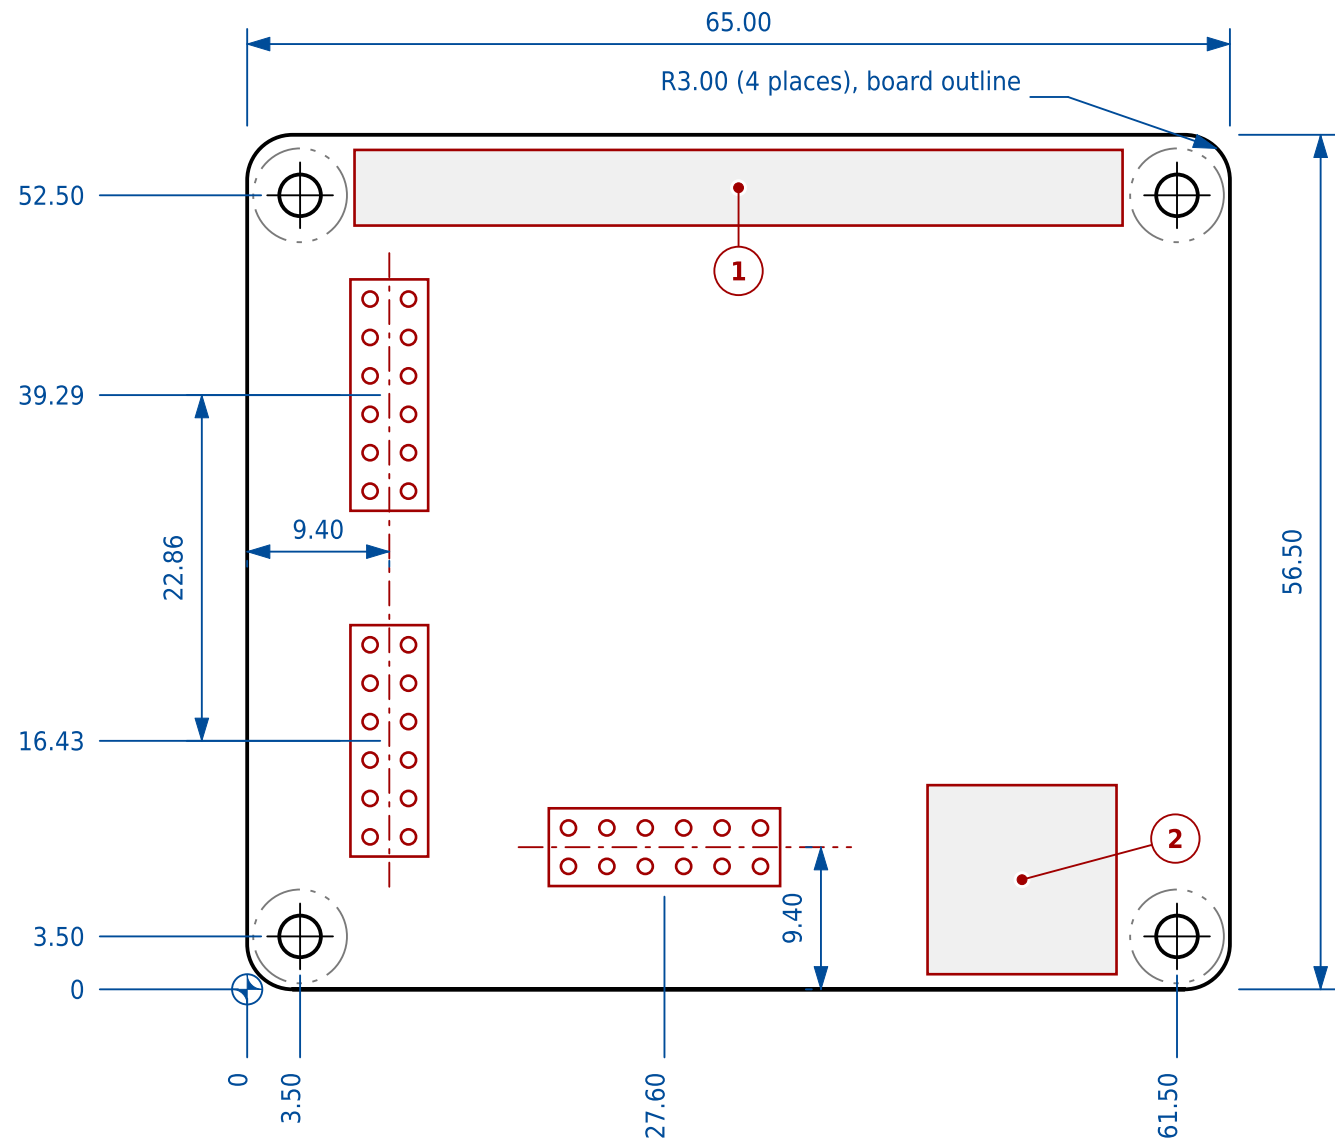

NOTES

- 1. Viewed from the component side.
- 2. Outline, corner radii and mounting holes are the Raspberry Pi HAT specification's. Everything else is DERIVED from Digilent's top-view photo, as they publish no drawing: Pmod hosts good to about +/-0.75 mm, the barrel jack to +/-1.5 mm.
- 3. All three hosts are right-angle: the connector body overhangs the board edge by roughly 3 mm and a peripheral plugs in from outside that edge.
- 4. JA to JB is snapped to the 22.86 mm the Pmod Interface Specification mandates; it measured 23.18 mm, within the uncertainty.

SOURCES

- 1. Raspberry Pi HAT mechanical specification: <https://github.com/raspberrypi/hats-hat-board-mechanical.pdf> - 65 x 56.0 or 65 x 56.5 mm (56.5 for an SMT 40-way header), 3 mm corner radii, four 2.75 mm holes 3.5 mm in from the edges on a 58 x 49 mm rectangle.
- 2. Pmod Interface Specification 1.2.0: <https://mith.ro/pmod-spec/> - Digilent, revised 5 October 2017. Host ports on a common board edge are spaced .90 in (22.86 mm) centre to centre; pins are on a .10 in (2.54 mm) grid in both axes.
- 3. Board outline: <https://digilent.com/reference/add-ons/pmod-hat/start> - Digilent state width 65 mm, length 56.5 mm.
- 4. Pmod host positions: [https://digilent.com/reference/\\_media/reference/add-ons/pmod-hat/pmod-hat-adapter-top-1000.png](https://digilent.com/reference/_media/reference/add-ons/pmod-hat/pmod-hat-adapter-top-1000.png) - Measured from Digilent's official top view by accessories/measure\_pmod\_hat.py. Digilent publish no dimensioned drawing for this board.

HOLE SCHEDULE

| ID  | X mm  | Y mm  | DIA mm | KEEPOUT mm |
|-----|-------|-------|--------|------------|
| MT1 | 3.50  | 3.50  | 2.75   | 6.20       |
| MT2 | 61.50 | 3.50  | 2.75   | 6.20       |
| MT3 | 3.50  | 52.50 | 2.75   | 6.20       |
| MT4 | 61.50 | 52.50 | 2.75   | 6.20       |

PMOD HOST HEADERS

| PORT | EDGE   | CX mm  | CY mm  | PIN1 X mm | PIN1 Y mm |
|------|--------|--------|--------|-----------|-----------|
| JA   | left   | 9.400  | 39.290 | 8.130     | 45.640    |
| JB   | left   | 9.400  | 16.430 | 8.130     | 22.780    |
| JC   | bottom | 27.600 | 9.400  | 21.250    | 8.130     |

FEATURE SCHEDULE

| # | FEATURE                                | X EXTENT mm    | Y EXTENT mm    |
|---|----------------------------------------|----------------|----------------|
| 1 | 40-pin GPIO socket (mates with the Pi) | 7.10 to 57.90  | 50.50 to 55.50 |
| 2 | 5 V barrel jack J2                     | 45.00 to 57.50 | 1.00 to 13.50  |

LEGEND

- Board outline
- Component body, scheduled
- Pmod connector body, hole keep-out
- Dimension, extension and leader

DIGILENT PMOD HAT ADAPTER

410-366, fitted to a Raspberry Pi 40-pin GPIO header

|                                              |                        |                                     |                                                                                |                    |  |                     |                 |
|----------------------------------------------|------------------------|-------------------------------------|--------------------------------------------------------------------------------|--------------------|--|---------------------|-----------------|
| DRAWN<br><b>generated</b>                    |                        | VERSION<br><b>v0.0-175-g40b2741</b> |                                                                                | UNITS<br><b>mm</b> |  | SCALE<br><b>2:1</b> |                 |
| SIZE<br><b>A3</b>                            | SHEET<br><b>1 OF 1</b> |                                     | DRAWING NO<br><b>ACC-HAT-PMOD</b>                                              |                    |  |                     | REV<br><b>A</b> |
| MATERIAL<br><b>PCB, thickness not stated</b> |                        |                                     | GENERAL TOLERANCE<br><b>HAT spec outline; hosts DERIVED +/-0.75, see notes</b> |                    |  |                     |                 |