


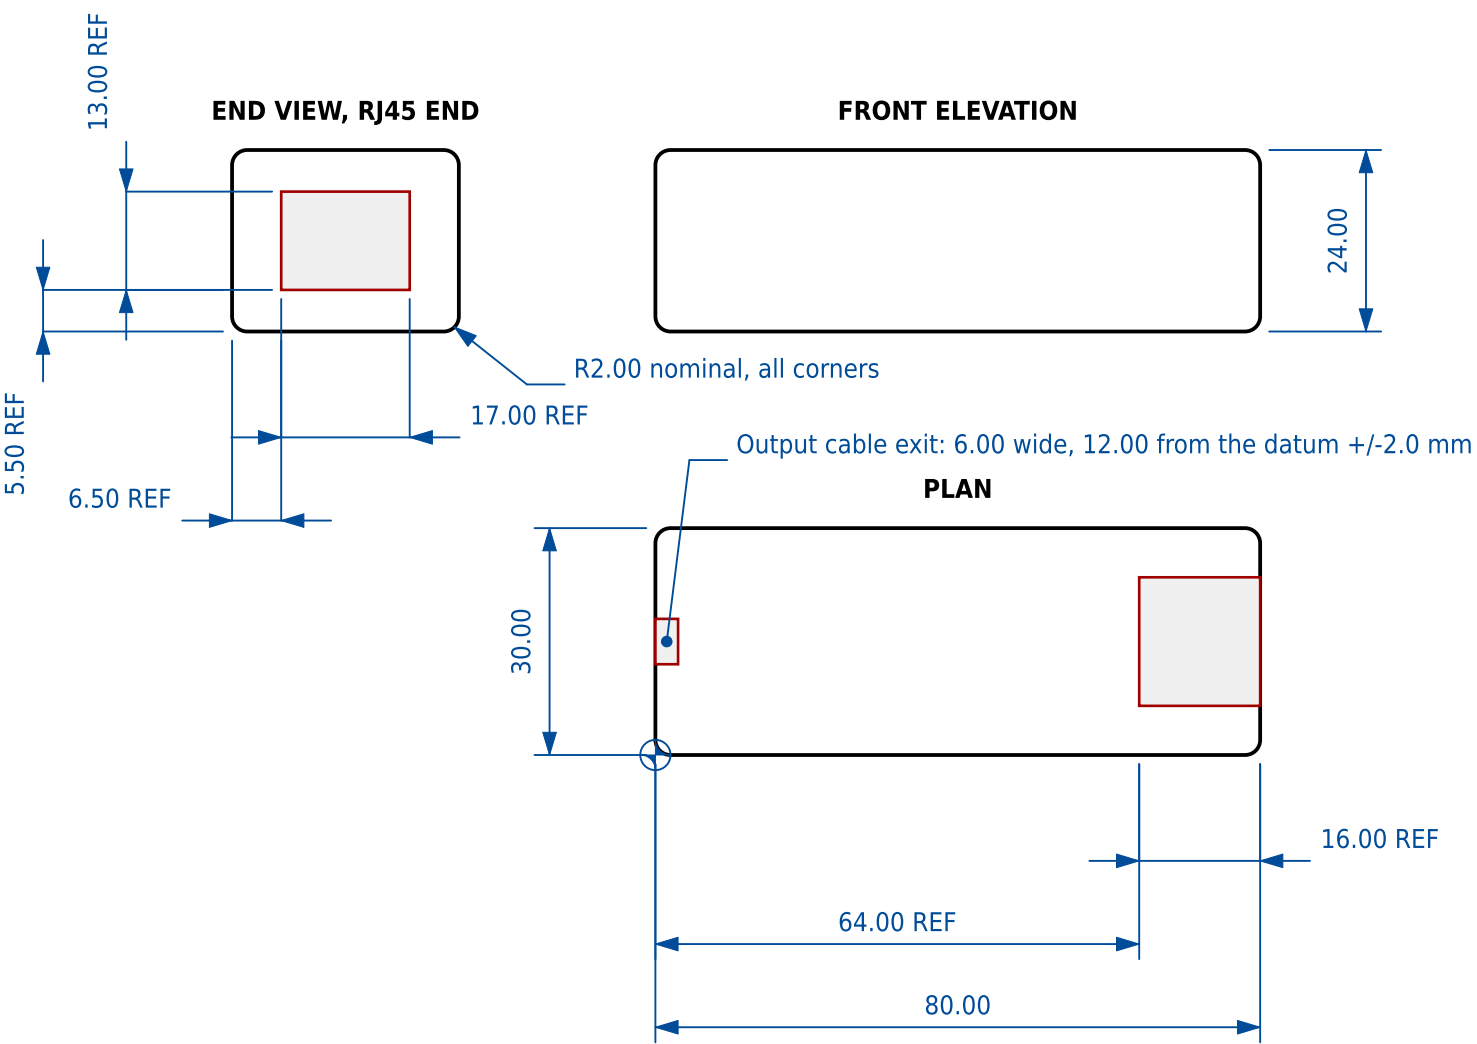

ENVELOPE

| DIMENSION      | mm    |
|----------------|-------|
| Overall length | 80.00 |
| Overall width  | 30.00 |
| Overall height | 24.00 |

FEATURES (PLAN VIEW)

| FEATURE                               | X EXTENT mm    | Y EXTENT mm    |
|---------------------------------------|----------------|----------------|
| RJ45 PoE input, moulded into the body | 64.00 to 80.00 | 6.50 to 23.50  |
| Output cable exit                     | 0.00 to 3.00   | 12.00 to 18.00 |

LEGEND

- Body envelope
- Aperture or cable exit
- Dimension, extension and leader

NOTES

- Origin at the datum on the plan: X along the length, Y across the width, Z up.
- Dimensions marked REF are scaled from vendor photographs, good to about +/-2.0 mm, and are not for inspection. The RJ45 aperture is a standard 8P8C envelope placed centrally, as the vendor does not dimension it.
- NO SINGLE OFFICIAL SOURCE: these are clones from several factories. The envelope drawn is the larger of the two published figures, Adafruit's 80 x 30 x 24 mm over DSLRKIT's 80 x 27 x 22 mm, so a real part may be up to 3 mm narrower and 2 mm lower.
- Gigabit variants come in a longer case, up to about 95 mm, hence L +15/-0 in the title block. Allow for it or check the part.
- No mounting holes: the case is a glued clamshell, so a bracket has to clamp or strap the body.

NOTES (continued)

- Output is a micro-USB male plug on a captive lead, quoted at 155 to 205 mm, from the cable exit. The plug and its bend radius, not the body, set how close the splitter can sit to the board it feeds.

SOURCES

- DSLRKIT active PoE splitter: <https://www.amazon.com/DSLRKIT-Active-Splitter-Ethernet-Raspberry/dp/B01H37XQP8> - Vendor text: "Body size: 80 x 27 x 22 mm", weight 55 g, DC cable 165 mm, RJ45 plug cable 155 mm.
- Adafruit 3785, equivalent unit: <https://www.adafruit.com/product/3785> - "Body dimensions: 80mm x 30mm x 24mm", weight 54.1 g, each lead 205 mm.
- AliExpress listings: AliExpress items 1005006389914897, 1005005523161215, 1005009263116567 - Most listings quote packaging rather than body size. The one plausible body figure seen was 95 x 28 x 24 mm, for a gigabit variant in a longer case.

GENERIC POE SPLITTER TO MICRO-USB

IEEE 802.3af, 5 V output, sealed plastic body

|                                    |                        |                                                                         |                    |                     |                 |
|------------------------------------|------------------------|-------------------------------------------------------------------------|--------------------|---------------------|-----------------|
| DRAWN<br><b>generated</b>          |                        | VERSION<br><b>v0.0-175-g40b2741</b>                                     | UNITS<br><b>mm</b> | SCALE<br><b>1:1</b> |                 |
| SIZE<br><b>A3</b>                  | SHEET<br><b>1 OF 1</b> | DRAWING NO<br><b>ACC-POE-MUSB</b>                                       |                    |                     | REV<br><b>A</b> |
| MATERIAL<br><b>moulded plastic</b> |                        | GENERAL TOLERANCE<br><b>W +0/-3 MAX H +0/-2 MAX L +15/-0, see notes</b> |                    |                     | PROJECTION<br>  |