


A

B

C

D

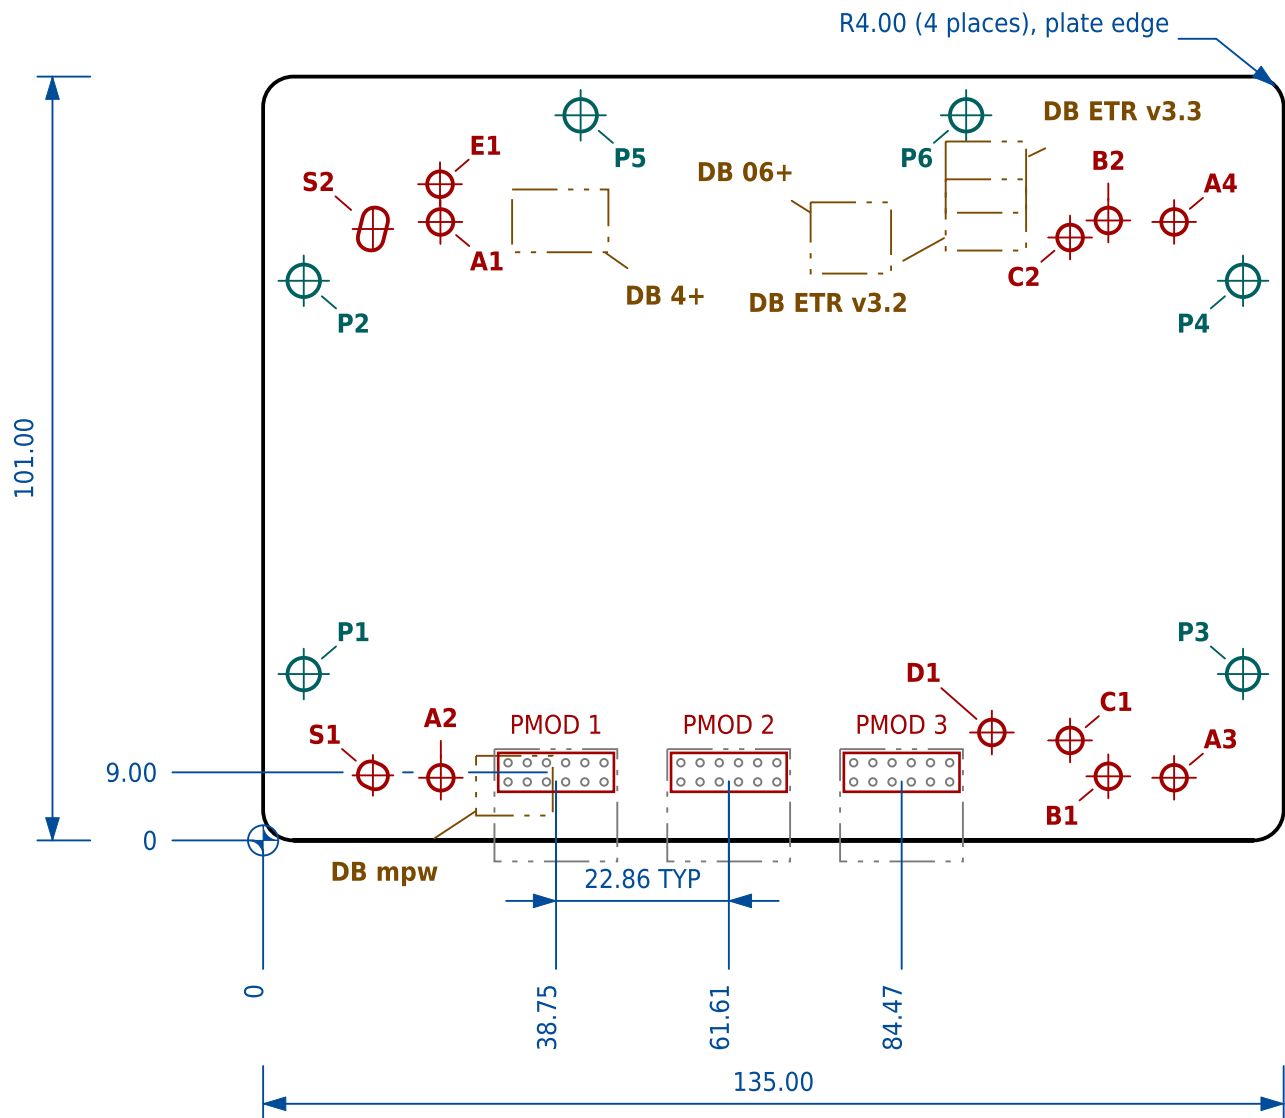

NOTES

1. Viewed from the side the board mounts on.
2. A slot row gives its two end centres; DIA/WIDTH is the slot width and LENGTH its overall length.
3. USED BY names the board a feature serves and that board's own hole ID, MT1 to MT4. Drawing TT-MP-FIT shows each board on the plate.
4. A hole's ID letter is the board it is there for, A DB mpw, B DB 4+, C DB 06+, D DB ETR v3.2, E DB ETR v3.3, numbered within it. S is a slot, P a plate fixing. A feature two boards share keeps one ID.
5. PMOD 1 to 3 are not machined features; they mark where every board's Pmod host pin fields land.
6. Board holes and slots are 3.4 mm, clearance for M3 standoffs. Plate fixings are 4.3 mm, clearance for M4. A slot serves two boards whose holes are too close together to drill separately.
7. Pmod connector bodies overhang the front (lower) edge by 2.78 mm; keep it clear so a peripheral can plug in.
8. Boards stand on M3 x 8 mm standoffs, plate face to board underside.

NOTES (continued)

9. Cut file: tt-generic-mounting-plate.dxf. Sizes are finished sizes.
10. Fit the plate to the chassis before the board: a board overhangs the plate fixings. Thinnest web between features is 1.59 mm, between A1 and E1.

SOURCES

1. Derived from: [tinytapeout/boards.py](https://github.com/TinyTapeout/tt-demo-pcb/blob/521108f4abad8e7a57e517b170d3d62ceb06667f/case/tt06_demo_base.scad) - Board outlines, mounting holes and Pmod host positions for every Tiny Tapeout demo board revision, extracted from the upstream KiCad files.
2. Standoff height: https://github.com/TinyTapeout/tt-demo-pcb/blob/521108f4abad8e7a57e517b170d3d62ceb06667f/case/tt06_demo_base.scad - Tiny Tapeout's own printed base: Height = 8 with a 1.6 mm PCB let into it, so its studs stand the board 6.4 mm up. The plate's 8 mm is not less.
3. Pmod host pitch: <https://mith.ro/pmod-spec/> - Diligent mandate .90 in (22.86 mm) between adjacent host ports on a board edge, which is why one plate can serve every revision.

BOARD MOUNTING HOLES

ID	X mm	Y mm	DIA/WIDTH mm	LENGTH mm	USED BY
A1	23.45	81.78	3.40	-	DB mpw:MT3, DB ETR v3.2:MT1
A2	23.51	8.29	3.40	-	DB mpw:MT1
A3	120.51	8.29	3.40	-	DB mpw:MT2
A4	120.51	81.78	3.40	-	DB mpw:MT4
B1	111.81	8.47	3.40	-	DB 4+:MT2
B2	111.81	81.97	3.40	-	DB 4+:MT4
C1	106.75	13.22	3.40	-	DB 06+:MT2
C2	106.75	79.72	3.40	-	DB 06+:MT4
D1	96.40	14.27	3.40	-	DB ETR v3.2:MT2, DB ETR v3.3:MT2
E1	23.40	86.77	3.40	-	DB ETR v3.3:MT1
S1	14.24 / 14.80	8.72 / 8.47	3.40	4.01	DB 4+:MT1, DB 06+:MT1
S2	14.24 / 14.80	79.72 / 81.97	3.40	5.72	DB 4+:MT3, DB 06+:MT3

PLATE FIXING HOLES

ID	X mm	Y mm	DIA mm
P1	5.37	22.00	4.30
P2	5.37	74.00	4.30
P3	129.63	22.00	4.30
P4	129.63	74.00	4.30
P5	42.00	95.89	4.30
P6	93.00	95.89	4.30

LEGEND

- Plate edge
- Hole or slot for a demo board fastener
- Plate fixing, into the chassis
- Slot axis
- Pmod host pin field, where a board's hosts land
- Pmod connector body, overhanging the front edge
- USB-C connector, one position per board version
- Dimension, extension and leader

TT GENERIC MOUNTING PLATE

Accepts every demo board revision, Pmod hosts fixed in place

DRAWN generated		VERSION v0.0-352-g967eb38		UNITS mm		SCALE 1:1	
SIZE A3	SHEET 1 OF 2		DRAWING NO TT-MP-PLATE				REV A
MATERIAL 3 mm acrylic or 1.6 mm FR4			GENERAL TOLERANCE edge +/-0.20 hole pos +/-0.10 allow for cutter kerf				