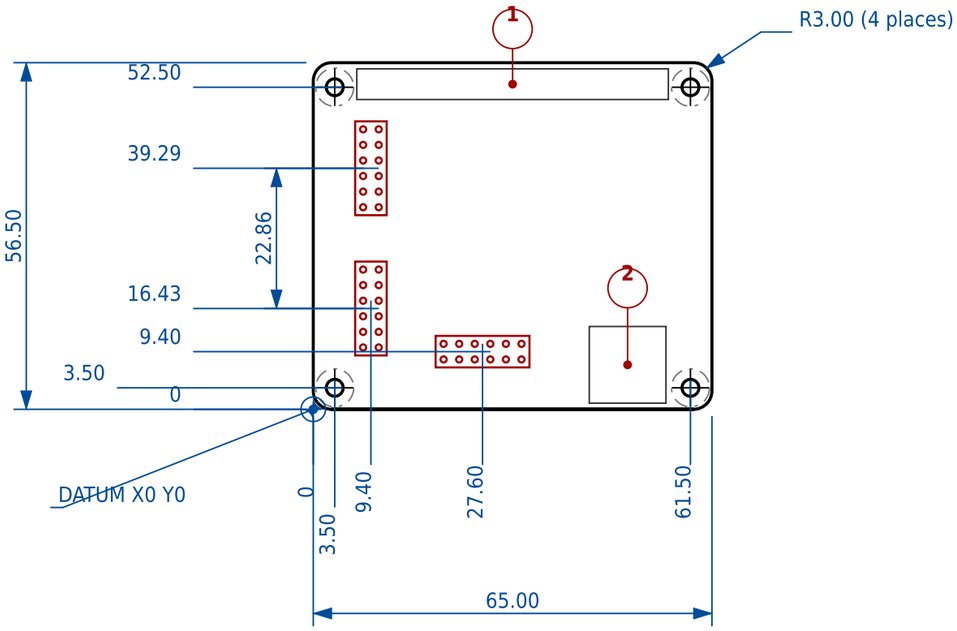


HOLE SCHEDULE

ID	X	Y	DIA	KEEPOUT
M1	3.50	3.50	2.75	6.20
M2	61.50	3.50	2.75	6.20
M3	3.50	52.50	2.75	6.20
M4	61.50	52.50	2.75	6.20

PMOD HOST HEADERS

PORT	REF	CX	CY	PIN1 X	PIN1 Y
JA	JA	9.40	39.29	8.13	45.64
JB	JB	9.40	16.43	8.13	22.78
JC	JC	27.60	9.40	21.25	8.13

FEATURE SCHEDULE

#	FEATURE	X EXTENT	Y EXTENT
1	40-pin GPIO socket (mates with the Pi)	7.10 to 57.90	50.50 to 55.50
2	5 V barrel jack J2	45.00 to 57.50	1.00 to 13.50

NOTES

1. All dimensions in millimetres. Datum is the lower-left corner of the board outline; X to the right, Y up, viewed from the component side.
2. Hole and Pmod positions are ordinate dimensions from that single datum, so they do not accumulate tolerance.
3. DERIVED DIMENSIONS. Digilent publish no mechanical drawing, DXF, STEP or board file for this product. Pmod host positions were measured photogrammetrically and are good to about +/-0.75 mm.
4. 2 further note(s) omitted for space; the full set is in the data module this sheet was generated from.

SOURCES

1. Raspberry Pi HAT mechanical specification: https://github.com/raspberrypi/hats hat-board-mechanical.pdf
2. Pmod Interface Specification 1.2.0: https://digilent.com/reference/_media/reference/pmod/pmod-interface-specification-1_2_0.pdf
3. Board outline: https://digilent.com/reference/add-ons/pmod-hat/start
4. Pmod host positions: https://digilent.com/reference/_media/reference/add-ons/pmod-hat/pmod-hat-adapter-top-1000.png

DIGILENT PMOD HAT ADAPTER

410-366, fitted to a Raspberry Pi 40-pin GPIO header

DRAWN	DATE	UNITS	SCALE
generated	**2026-09-10**	**mm**	**1:1**
SIZE	SHEET	DRAWING NO	REV
A3	**1 OF 1**	**ACC-01**	**A**
MATERIAL	GENERAL TOLERANCE		
PCB	**+/-0.20 edge, +/-0.10 hole pos, +/-0.08 hole dia**		