


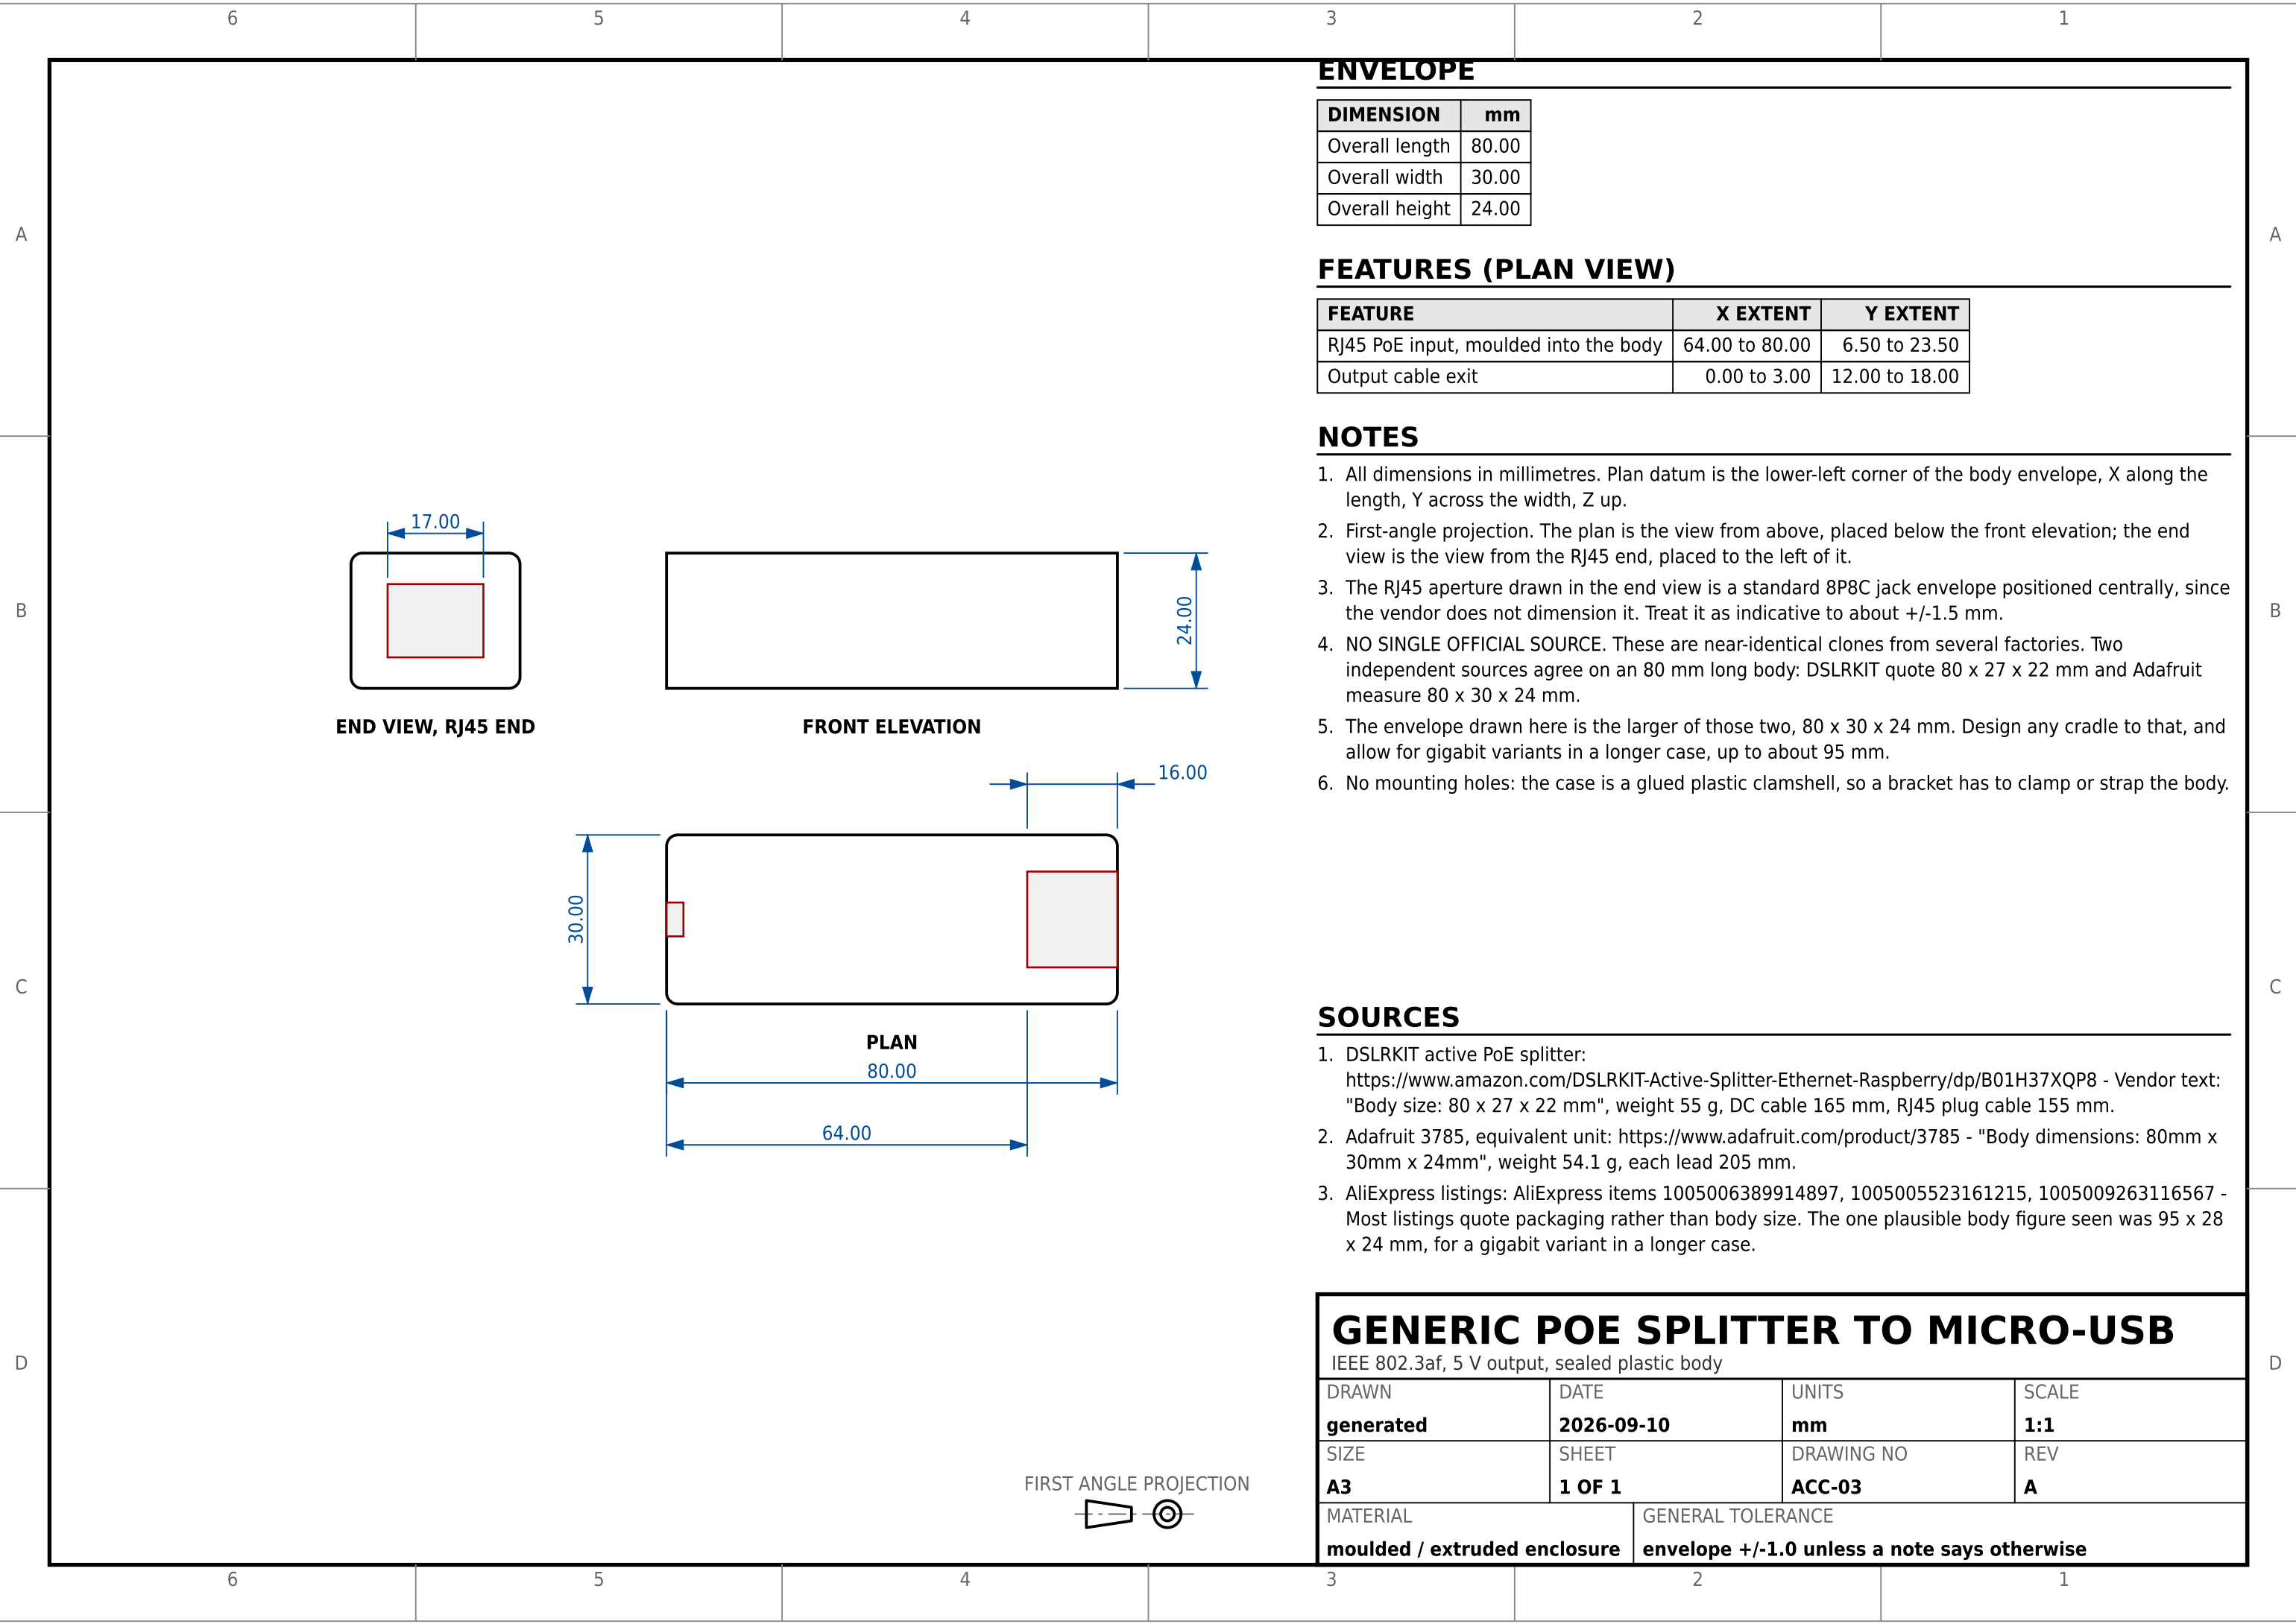

ENVELOPE

DIMENSION	mm
Overall length	80.00
Overall width	30.00
Overall height	24.00

FEATURES (PLAN VIEW)

FEATURE	X EXTENT	Y EXTENT
RJ45 PoE input, moulded into the body	64.00 to 80.00	6.50 to 23.50
Output cable exit	0.00 to 3.00	12.00 to 18.00

NOTES

1. All dimensions in millimetres. Plan datum is the lower-left corner of the body envelope, X along the length, Y across the width, Z up.
2. First-angle projection. The plan is the view from above, placed below the front elevation; the end view is the view from the RJ45 end, placed to the left of it.
3. The RJ45 aperture drawn in the end view is a standard 8P8C jack envelope positioned centrally, since the vendor does not dimension it. Treat it as indicative to about +/-1.5 mm.
4. NO SINGLE OFFICIAL SOURCE. These are near-identical clones from several factories. Two independent sources agree on an 80 mm long body: DSLRKIT quote 80 x 27 x 22 mm and Adafruit measure 80 x 30 x 24 mm.
5. The envelope drawn here is the larger of those two, 80 x 30 x 24 mm. Design any cradle to that, and allow for gigabit variants in a longer case, up to about 95 mm.
6. No mounting holes: the case is a glued plastic clamshell, so a bracket has to clamp or strap the body.

SOURCES

1. DSLRKIT active PoE splitter:
<https://www.amazon.com/DSLRSKIT-Active-Splitter-Ethernet-Raspberry/dp/B01H37XQP8> - Vendor text: "Body size: 80 x 27 x 22 mm", weight 55 g, DC cable 165 mm, RJ45 plug cable 155 mm.
2. Adafruit 3785, equivalent unit: <https://www.adafruit.com/product/3785> - "Body dimensions: 80mm x 30mm x 24mm", weight 54.1 g, each lead 205 mm.
3. AliExpress listings: AliExpress items 1005006389914897, 1005005523161215, 1005009263116567 - Most listings quote packaging rather than body size. The one plausible body figure seen was 95 x 28 x 24 mm, for a gigabit variant in a longer case.

GENERIC POE SPLITTER TO MICRO-USB			
IEEE 802.3af, 5 V output, sealed plastic body			
DRAWN	DATE	UNITS	SCALE
generated	2026-09-10	mm	1:1
SIZE	SHEET	DRAWING NO	REV
A3	1 OF 1	ACC-03	A
MATERIAL		GENERAL TOLERANCE	
moulded / extruded enclosure		envelope +/-1.0 unless a note says otherwise	