


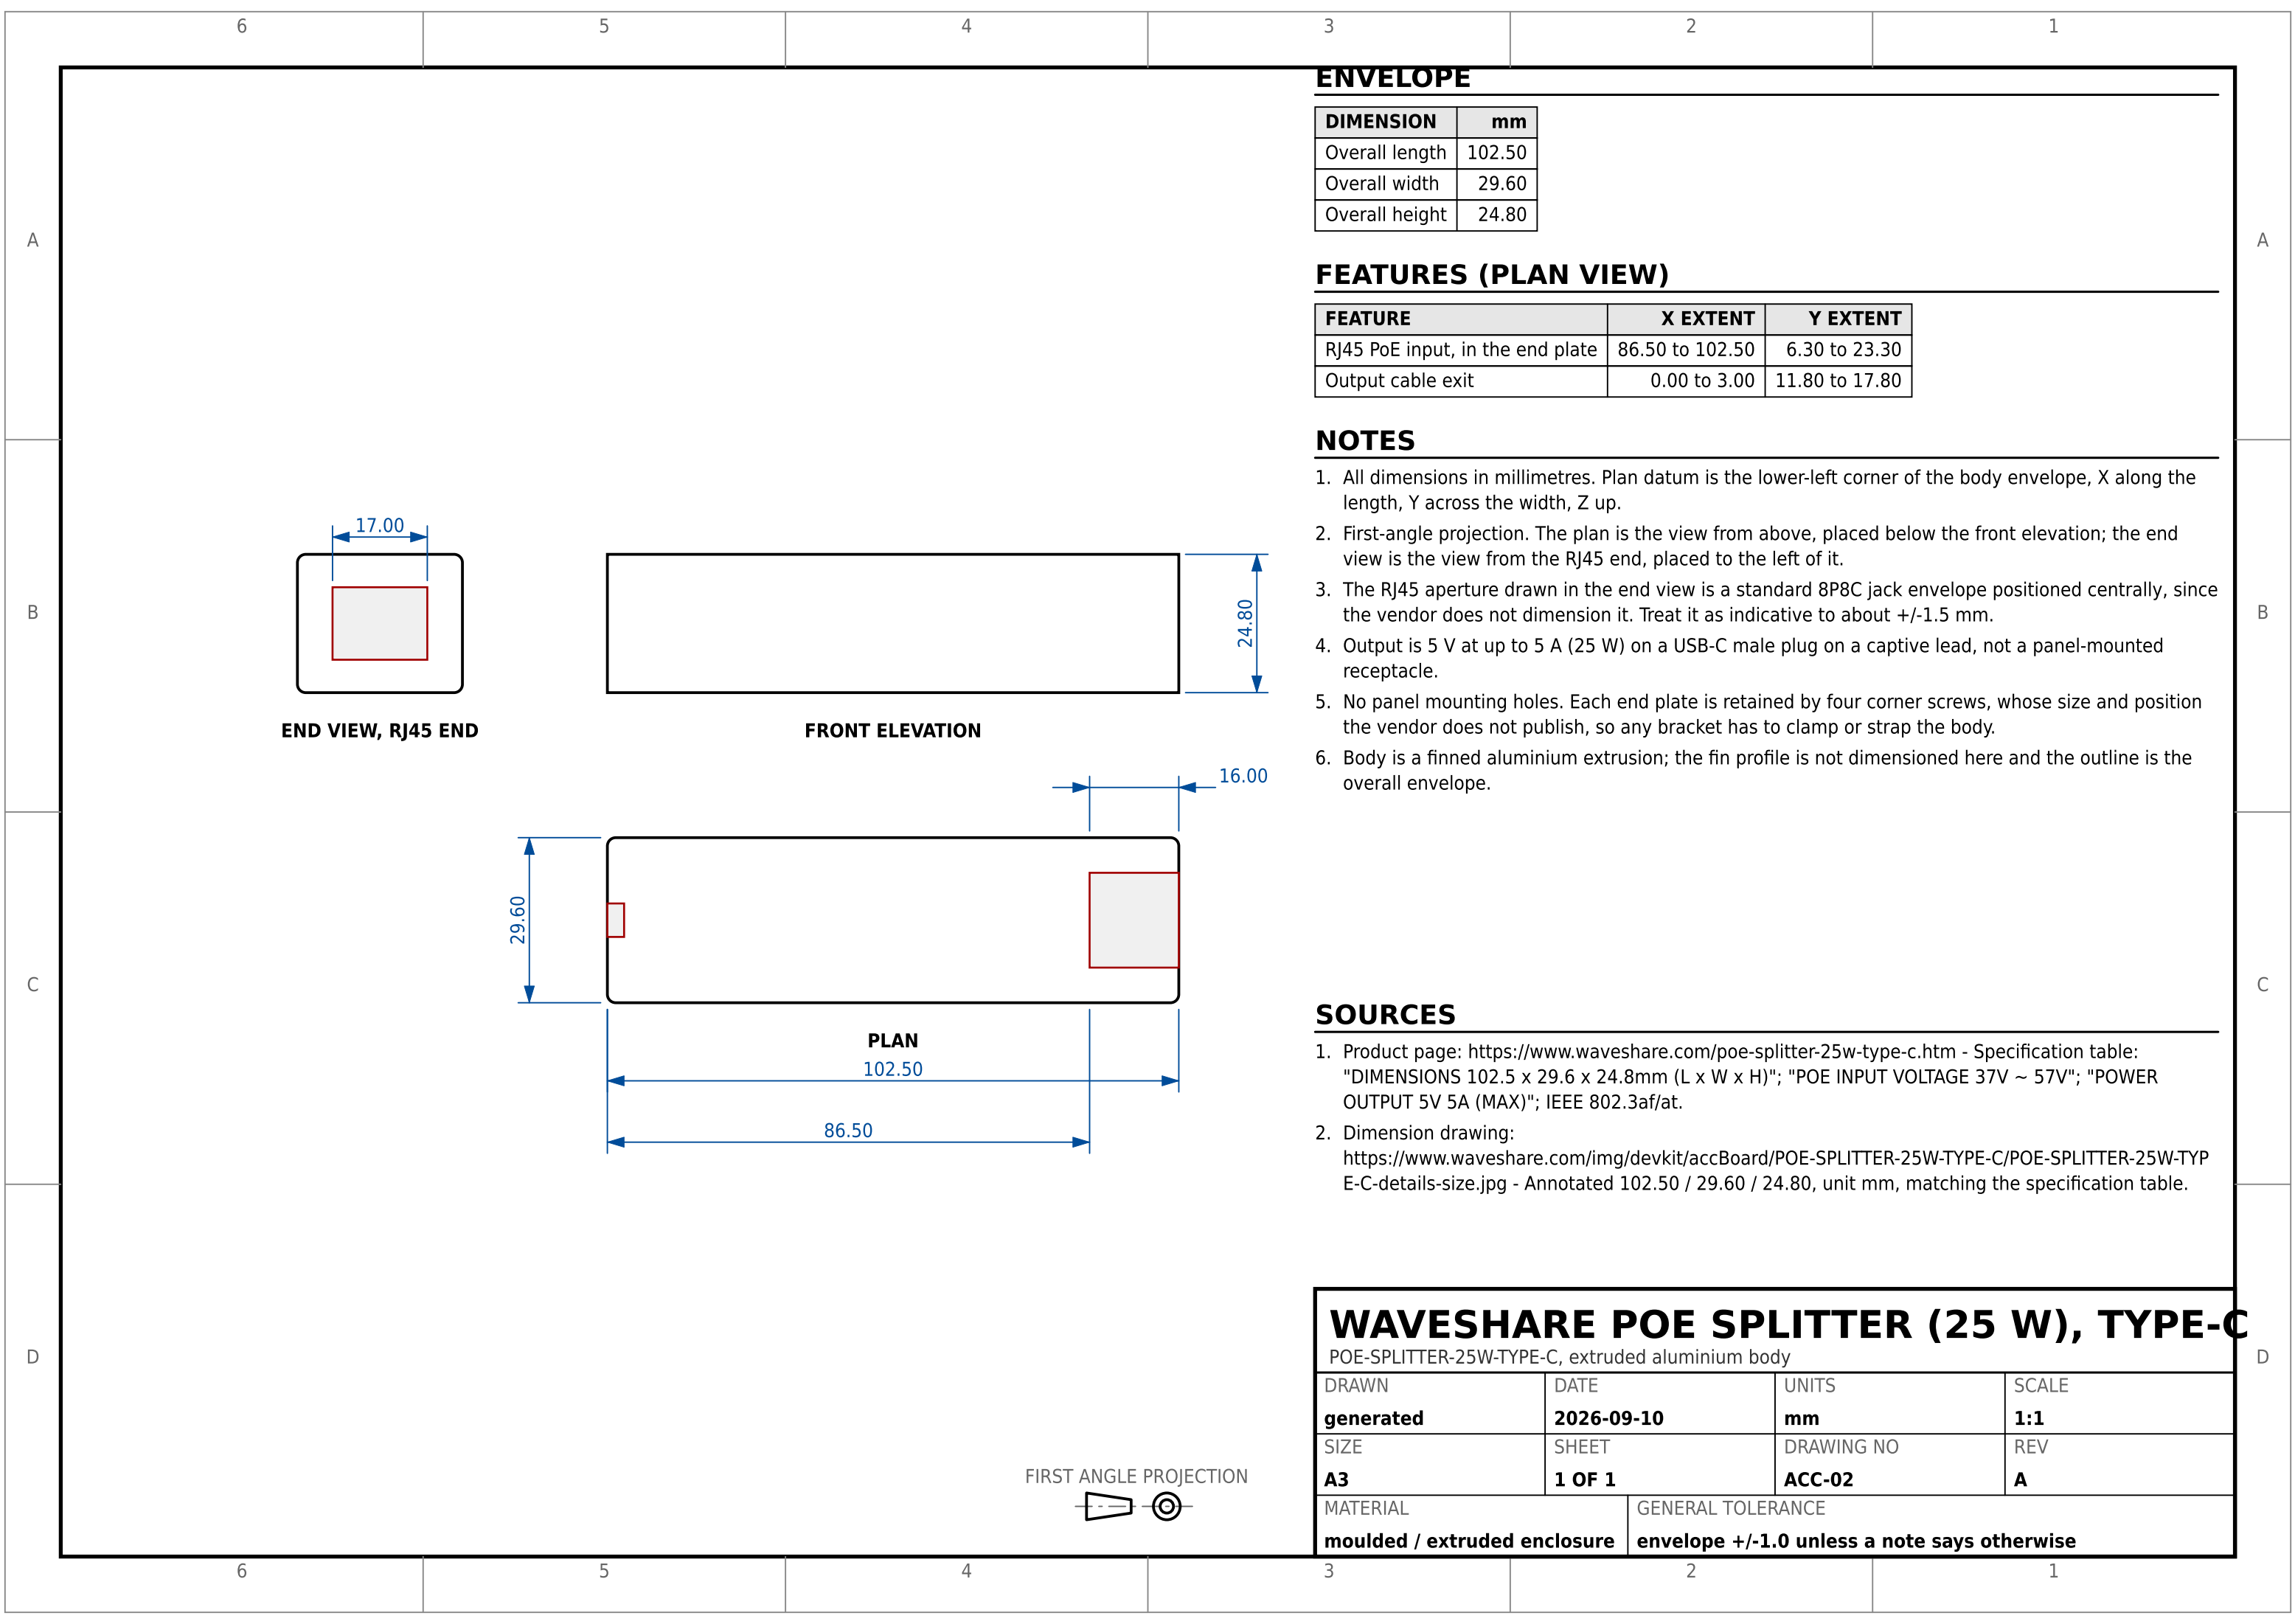

ENVELOPE

DIMENSION	mm
Overall length	102.50
Overall width	29.60
Overall height	24.80

FEATURES (PLAN VIEW)

FEATURE	X EXTENT	Y EXTENT
RJ45 PoE input, in the end plate	86.50 to 102.50	6.30 to 23.30
Output cable exit	0.00 to 3.00	11.80 to 17.80

NOTES

1. All dimensions in millimetres. Plan datum is the lower-left corner of the body envelope, X along the length, Y across the width, Z up.
2. First-angle projection. The plan is the view from above, placed below the front elevation; the end view is the view from the RJ45 end, placed to the left of it.
3. The RJ45 aperture drawn in the end view is a standard 8P8C jack envelope positioned centrally, since the vendor does not dimension it. Treat it as indicative to about +/-1.5 mm.
4. Output is 5 V at up to 5 A (25 W) on a USB-C male plug on a captive lead, not a panel-mounted receptacle.
5. No panel mounting holes. Each end plate is retained by four corner screws, whose size and position the vendor does not publish, so any bracket has to clamp or strap the body.
6. Body is a finned aluminium extrusion; the fin profile is not dimensioned here and the outline is the overall envelope.

SOURCES

1. Product page: <https://www.waveshare.com/poe-splitter-25w-type-c.htm> - Specification table: "DIMENSIONS 102.5 x 29.6 x 24.8mm (L x W x H)"; "POE INPUT VOLTAGE 37V ~ 57V"; "POWER OUTPUT 5V 5A (MAX)"; IEEE 802.3af/at.
2. Dimension drawing: <https://www.waveshare.com/img/devkit/accBoard/POE-SPLITTER-25W-TYPE-C/POE-SPLITTER-25W-TYP-E-C-details-size.jpg> - Annotated 102.50 / 29.60 / 24.80, unit mm, matching the specification table.

WAVESHARE POE SPLITTER (25 W), TYPE-C			
POE-SPLITTER-25W-TYPE-C, extruded aluminium body			
DRAWN	DATE	UNITS	SCALE
generated	2026-09-10	mm	1:1
SIZE	SHEET	DRAWING NO	REV
A3	1 OF 1	ACC-02	A
MATERIAL		GENERAL TOLERANCE	
moulded / extruded enclosure		envelope +/-1.0 unless a note says otherwise	