



A


A

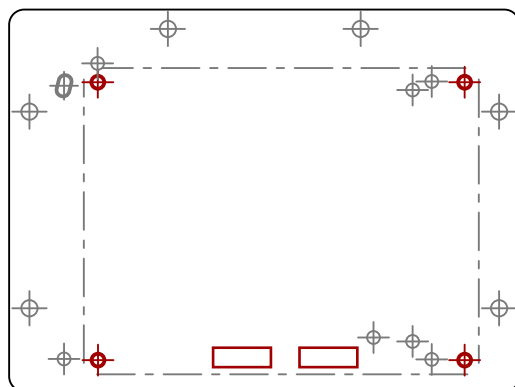


TT01-03 (TT01, TT02, TT03)
board rev tt123-v2.2.6 offset X 19.760 Y 4.535

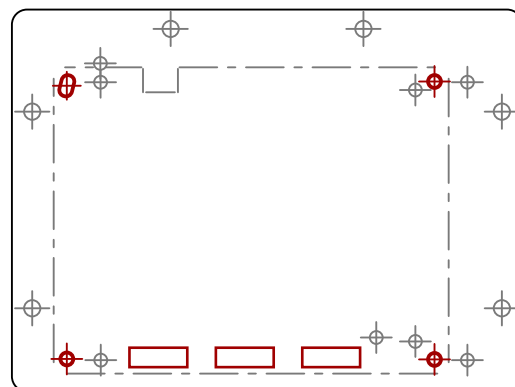


TT04-05 (TT04, TT05)
board rev v1.2.2 offset X 11.055 Y 4.725

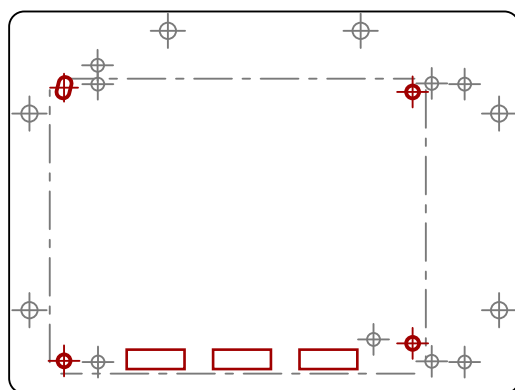

TT06-08 (TT06, TT07, TT08)
board rev v2.0.1 offset X 10.745 Y 5.225

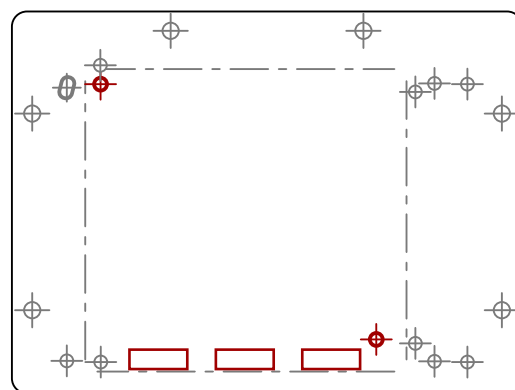

v3.2 (no shipped shuttle yet)
board rev v3.2 offset X 19.400 Y 5.770

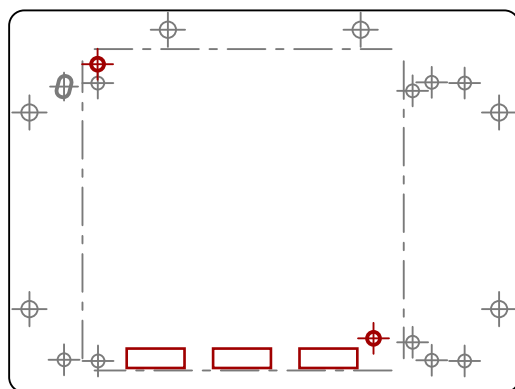

v3.3 (no shipped shuttle yet)
board rev v3.3 offset X 19,400 Y 5,770

BOARD PLACEMENT ON THE PLATE

REVISION	SHUTTLES	dX	dY	PMODS	FIRST SLOT
TT01-03	TT01, TT02, TT03	19.760	4.535	2	2
TT04-05	TT04, TT05	11.055	4.725	3	1
TT06-08	TT06, TT07, TT08	10.745	5.225	3	1
v3.2	not yet shipped	19.400	5.770	3	1
v3.3	not yet shipped	19.400	5.770	3	1

NOTES

1. Each view shows one demo board revision sitting on the plate, with the holes that revision uses drawn solid and the rest greyed back.
2. dX and dY place the board: add them to a coordinate in that board's own frame to get a plate coordinate.
3. The TT01/02/03 board has only two Pmod hosts. They go on plate Pmod positions 2 and 3, which makes the plate 5.15 mm narrower than putting them on 1 and 2 would.
4. All five revisions put their Pmod host pin fields on the same three positions, at the same height above the plate's front edge.

B

B

C

C

D

D

TT MOUNTING PLATE - BOARD FITTING GUIDE

Which holes each demo board revision uses

DRAWN generated	DATE 2026-09-10	UNITS mm	SCALE 1:2
SIZE A3	SHEET 1 OF 1	DRAWING NO TT-MP-02	REV A
MATERIAL -		GENERAL TOLERANCE +/-0.20 edge, +/-0.10 hole pos, +/-0.08 hole dia	