


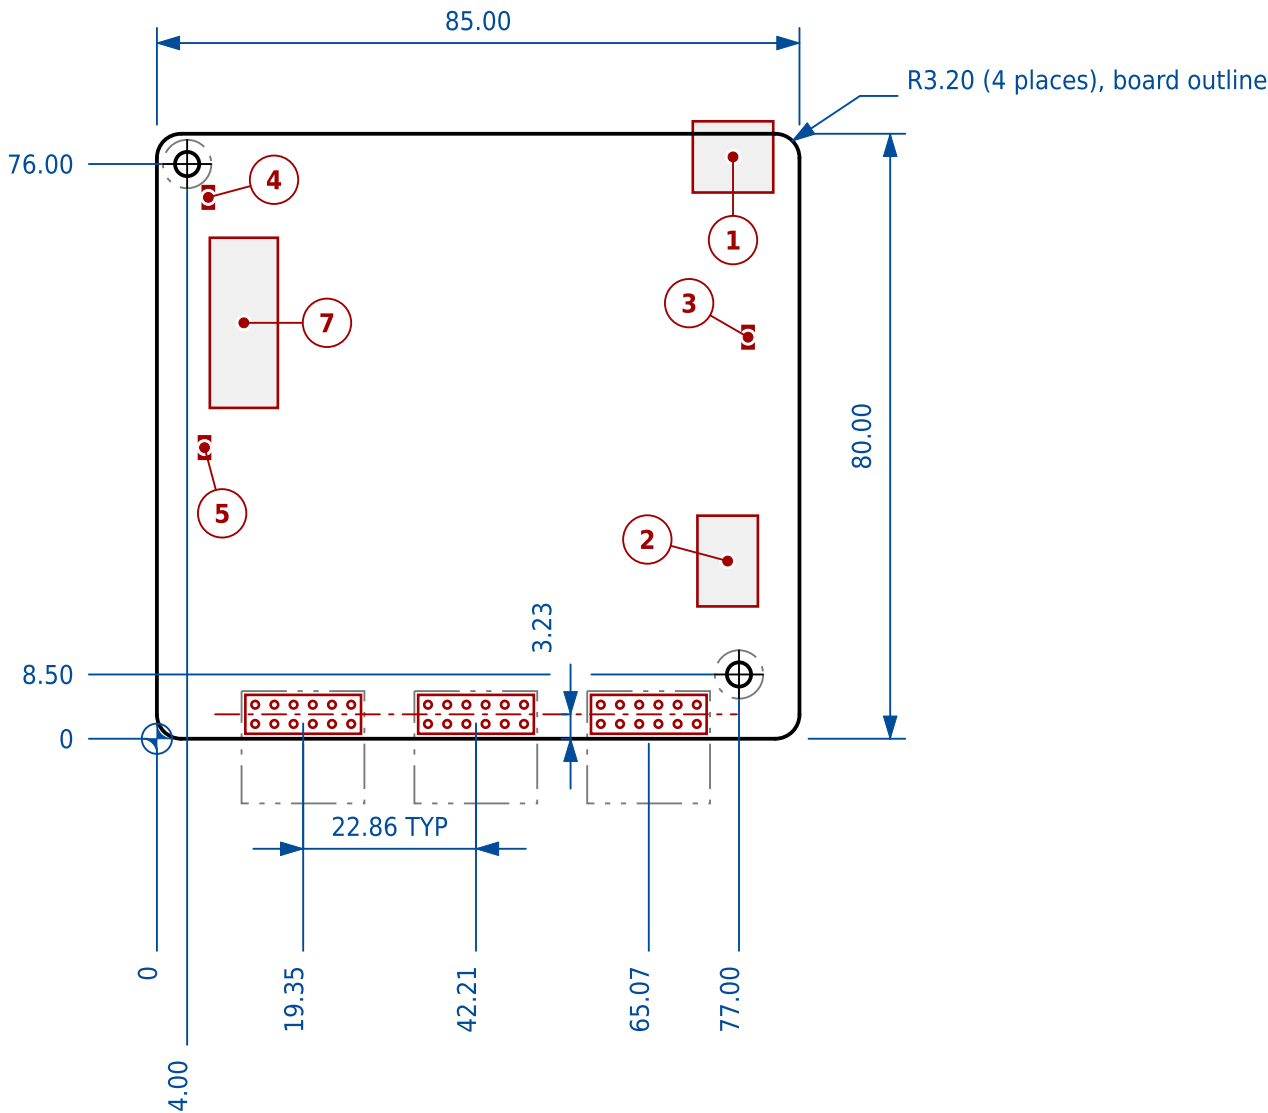

NOTES

1. Viewed from the component side.
2. Ships in TT09 Dev Kit, TTSKY25a Dev Kit, TTSKY25b Dev Kit, TTGF0p2 Dev Kit - P2 edition and FPGA Dev Kit.
3. Hole IDs are the KiCad reference designators.
4. "DB ETR" is the board's ID in Tiny Tapeout's board revision spreadsheet; the KiCad title block does not carry it.
5. Pmod host pitch, 22.86 mm (0.9 in), is the Digilent Pmod Interface Specification 1.2.0 figure and is the same on every revision; the mounting plate, TT-MP-01, registers against it.
6. Assembled envelope, connector overhang included: 85.00 x 81.65 mm.

SOURCES

1. KiCad board file: <https://github.com/TinyTapeout/tt-demo-pcb> tinytapeout-demo.kicad_pcb @ d830790ca - title block: Tiny Tapeout Demoboard v3 rev 3.2, dated 2025-11-12
2. Shuttle mapping: <https://mith.ro/tt-demoboards/> - row "DB ETR v3.2", Used by: TT09, TTSKY25a, TTSKY25b, TTGF0p2.

HOLE SCHEDULE

ID	X mm	Y mm	DIA mm	KEEPOUT mm
MT1	4.00	76.00	3.20	6.40
MT2	77.00	8.50	3.20	6.40

PMOD HOST HEADERS

PORT	REF	EDGE	CX mm	CY mm	PIN1 X mm	PIN1 Y mm
INPUT	J11	bottom	19.350	3.230	25.700	4.500
BIDIR	J12	bottom	42.210	3.230	48.560	4.500
OUTPUT	J13	bottom	65.070	3.230	71.420	4.500

FEATURE SCHEDULE

#	FEATURE	X EXTENT mm	Y EXTENT mm
1	USB-C power / control	70.89 to 81.53	72.23 to 81.65
2	7-segment display	71.50 to 79.50	17.50 to 29.50
3	LED D3	77.47 to 78.93	51.62 to 54.58
4	LED D4	6.07 to 7.53	70.11 to 73.07
5	LED D5	5.57 to 7.03	37.02 to 39.98
6	Fourth indicator LED - not on this board	-	-
7	8-way input DIP switch	7.00 to 16.00	43.75 to 66.25
8	Second DIP switch - not on this board	-	-
9	Side Pmod, first position - not on this board	-	-
10	Side Pmod, second position - not on this board	-	-
11	Side Pmod, third position - not on this board	-	-

LEGEND

- Board outline
- Component body, scheduled
- Pmod connector body, hole keep-out
- Dimension, extension and leader

DB ETR V3.2

tinytapeout-demo rev 3.2

DRAWN	VERSION	UNITS	SCALE
generated	v0.0-129-g83acf9e	mm	1:1
SIZE	SHEET	DRAWING NO	REV
A3	1 OF 1	TT-DB-05	A
MATERIAL		GENERAL TOLERANCE	
PCB, 1.6 nominal		edge +/-0.20 hole pos +/-0.10 hole dia +/-0.08	