


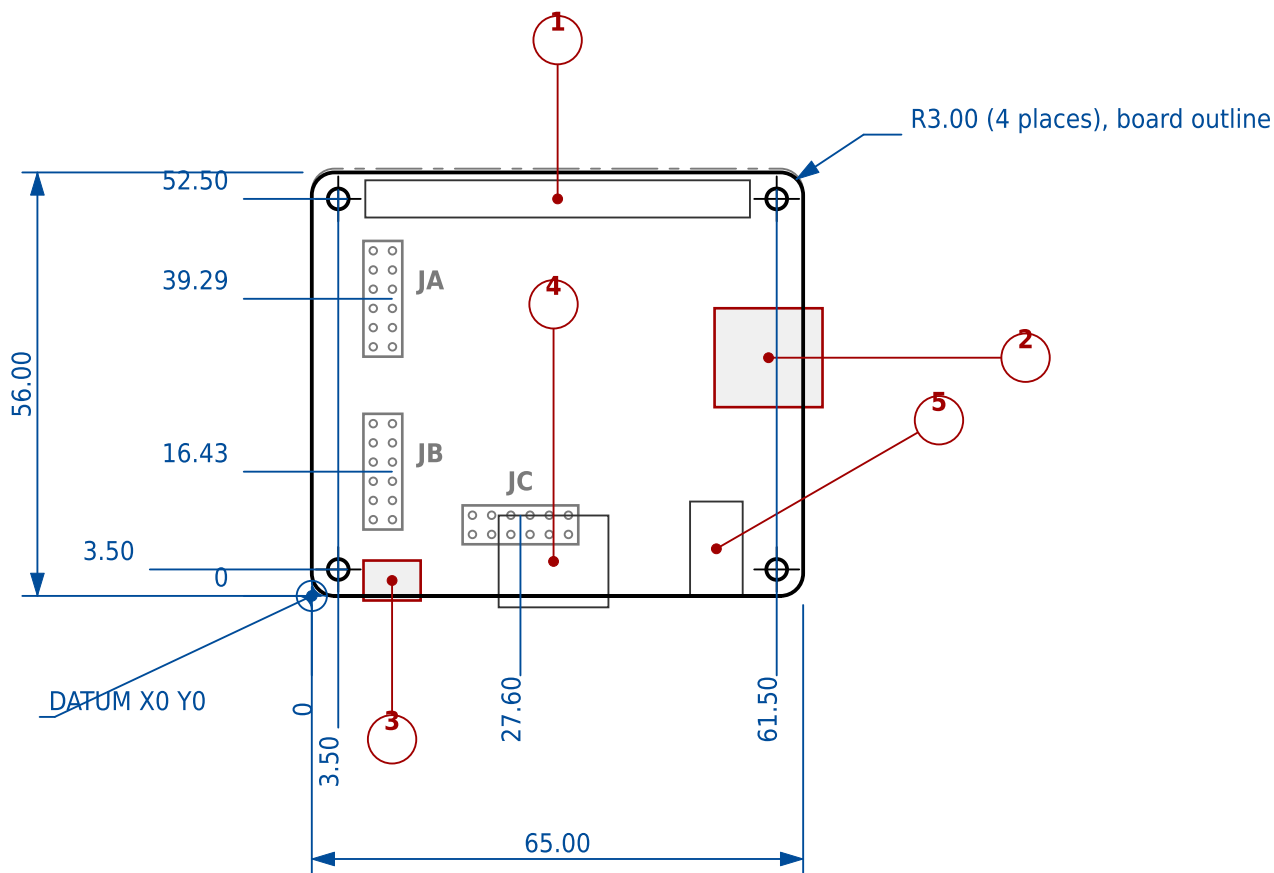

HOLE SCHEDULE

ID	X mm	Y mm	DIA mm	KEEPOUT mm
MT1	3.50	3.50	2.75 +/-0.05	not given
MT2	61.50	3.50	2.75 +/-0.05	not given
MT3	3.50	52.50	2.75 +/-0.05	not given
MT4	61.50	52.50	2.75 +/-0.05	not given

FEATURE SCHEDULE

#	FEATURE	X EXTENT mm	Y EXTENT mm
1	40-pin GPIO header	7.08 to 57.96	50.04 to 54.96
2	USB 2.0 type A (single)	53.28 to 67.56	24.96 to 38.04
3	micro-USB power input	6.84 to 14.40	-0.60 to 4.68
4	HDMI type A	24.72 to 39.24	-1.51 to 10.63
5	3.5 mm A/V jack	50.04 to 57.00	-0.02 to 12.48

PMOD HAT ADAPTER HOSTS

PORT	EDGE	CX mm	CY mm	PIN1 X mm	PIN1 Y mm
JA	left edge	9.40	39.29	8.13	45.64
JB	left edge	9.40	16.43	8.13	22.78
JC	bottom edge	27.60	9.40	21.25	8.13

NOTES

- All dimensions in millimetres. Datum is the lower-left corner of the board outline; X to the right, Y up, viewed from the component side.
- Hole and Pmod positions are ordinate dimensions from that single datum, so they do not accumulate tolerance.
- Phantom outline is the Digilent Pmod HAT Adapter fitted to the 40-pin GPIO header. Its Pmod host positions are given in this board's coordinate frame, since the adapter's mounting holes coincide with this board's.
- 8 further note(s) omitted for space; the full set is in the data module this sheet was generated from.

SOURCES

- Mechanical drawing:
<https://datasheets.raspberrypi.com/rpi3/raspberry-pi-3-a-plus-mechanical-drawing.pdf>
- Mounting holes:
<https://datasheets.raspberrypi.com/rpi3/raspberry-pi-3-a-plus-mechanical-drawing.pdf>

RASPBERRY PI 3 MODEL A+

65 x 56 mm

DRAWN generated	DATE 2026-09-10	UNITS mm	SCALE 1:1
SIZE A3	SHEET 1 OF 1	DRAWING NO RPI-01	REV A
MATERIAL PCB		GENERAL TOLERANCE +/-0.20 edge, +/-0.10 hole pos, +/-0.08 hole dia	