


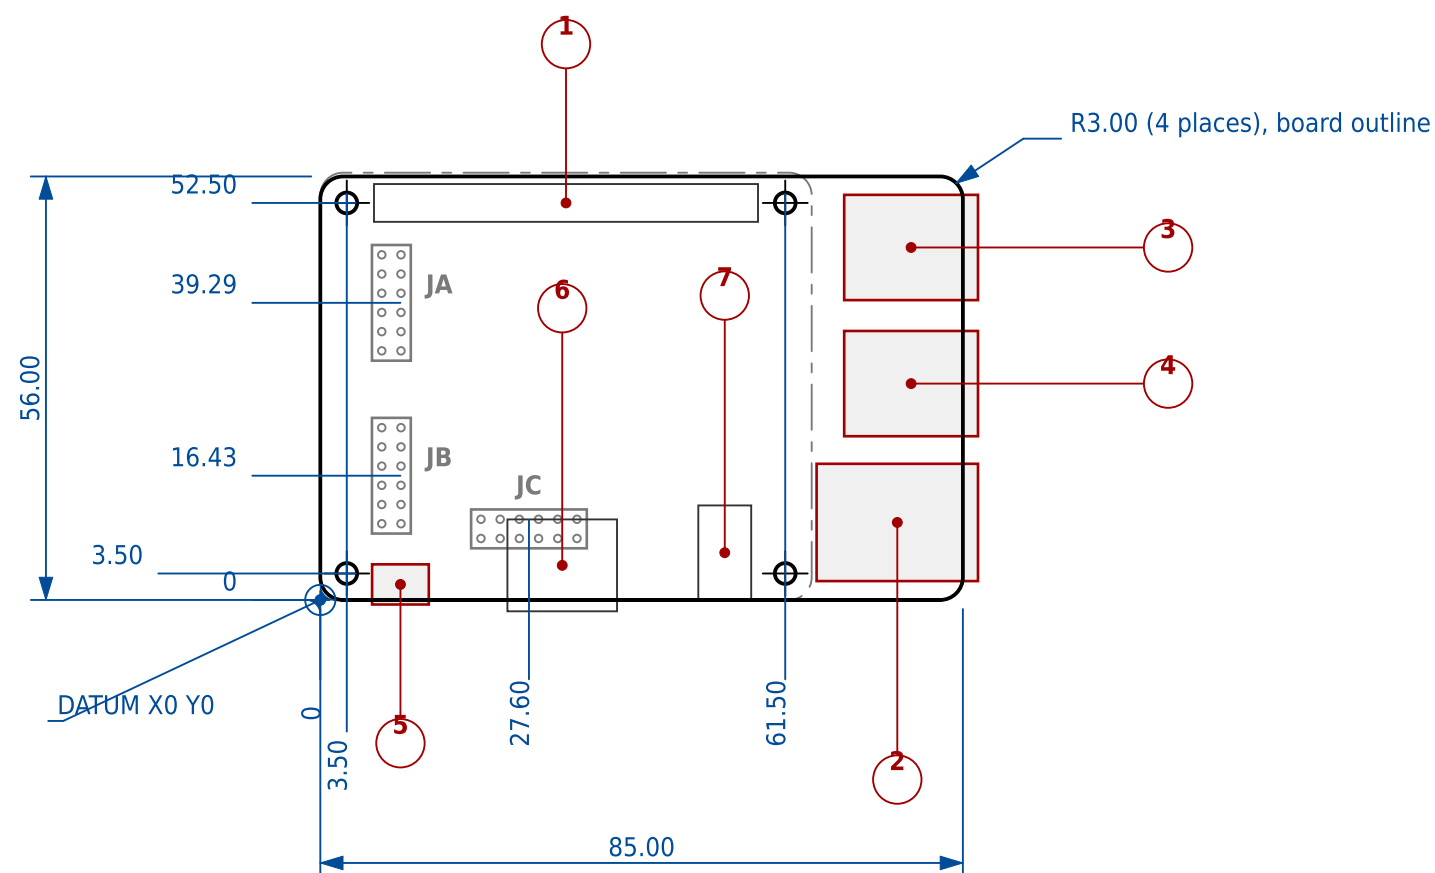

HOLE SCHEDULE

ID	X mm	Y mm	DIA mm	KEEPOUT mm
MT1	3.50	3.50	2.75 +/-0.05	not given
MT2	61.50	3.50	2.75 +/-0.05	not given
MT3	3.50	52.50	2.75 +/-0.05	not given
MT4	61.50	52.50	2.75 +/-0.05	not given

FEATURE SCHEDULE

#	FEATURE	X EXTENT mm	Y EXTENT mm
1	40-pin GPIO header	7.10 to 57.90	50.00 to 55.00
2	Ethernet RJ45	65.65 to 87.00	2.50 to 18.00
3	USB 2.0 type A (upper pair)	69.30 to 87.00	39.65 to 53.50
4	USB 2.0 type A (lower pair)	69.30 to 87.00	21.65 to 35.50
5	micro-USB power input	6.85 to 14.35	-0.60 to 4.70
6	HDMI type A	24.75 to 39.25	-1.50 to 10.65
7	3.5 mm A/V jack	50.00 to 57.00	0.00 to 12.50

PMOD HAT ADAPTER HOSTS

PORT	EDGE	CX mm	CY mm	PIN1 X mm	PIN1 Y mm
JA	left edge	9.40	39.29	8.13	45.60
JB	left edge	9.40	16.43	8.13	22.70
JC	bottom edge	27.60	9.40	21.25	8.13

NOTES

1. All dimensions in millimetres. Datum is the lower-left corner of the board outline; X to the right, Y up, viewed from the component side.
2. Hole and Pmod positions are ordinate dimensions from that single datum, so they do not accumulate tolerance.
3. 8 further note(s) omitted for space; the full set is in the data module this sheet was generated from.

SOURCES

1. Mechanical drawing:
<https://datasheets.raspberrypi.com/rpi3/raspberry-pi-3-b-plus-mechanical-drawing.dxf>
2. Mounting holes:
<https://datasheets.raspberrypi.com/rpi3/raspberry-pi-3-b-plus-mechanical-drawing.pdf>

RASPBERRY PI 3 MODEL B+

85 x 56 mm

DRAWN generated	DATE 2026-09-10	UNITS mm	SCALE 1:1
SIZE A3	SHEET 1 OF 1	DRAWING NO RPI-03	REV A
MATERIAL PCB		GENERAL TOLERANCE +/-0.20 edge, +/-0.10 hole pos, +/-0.08 hole dia	