


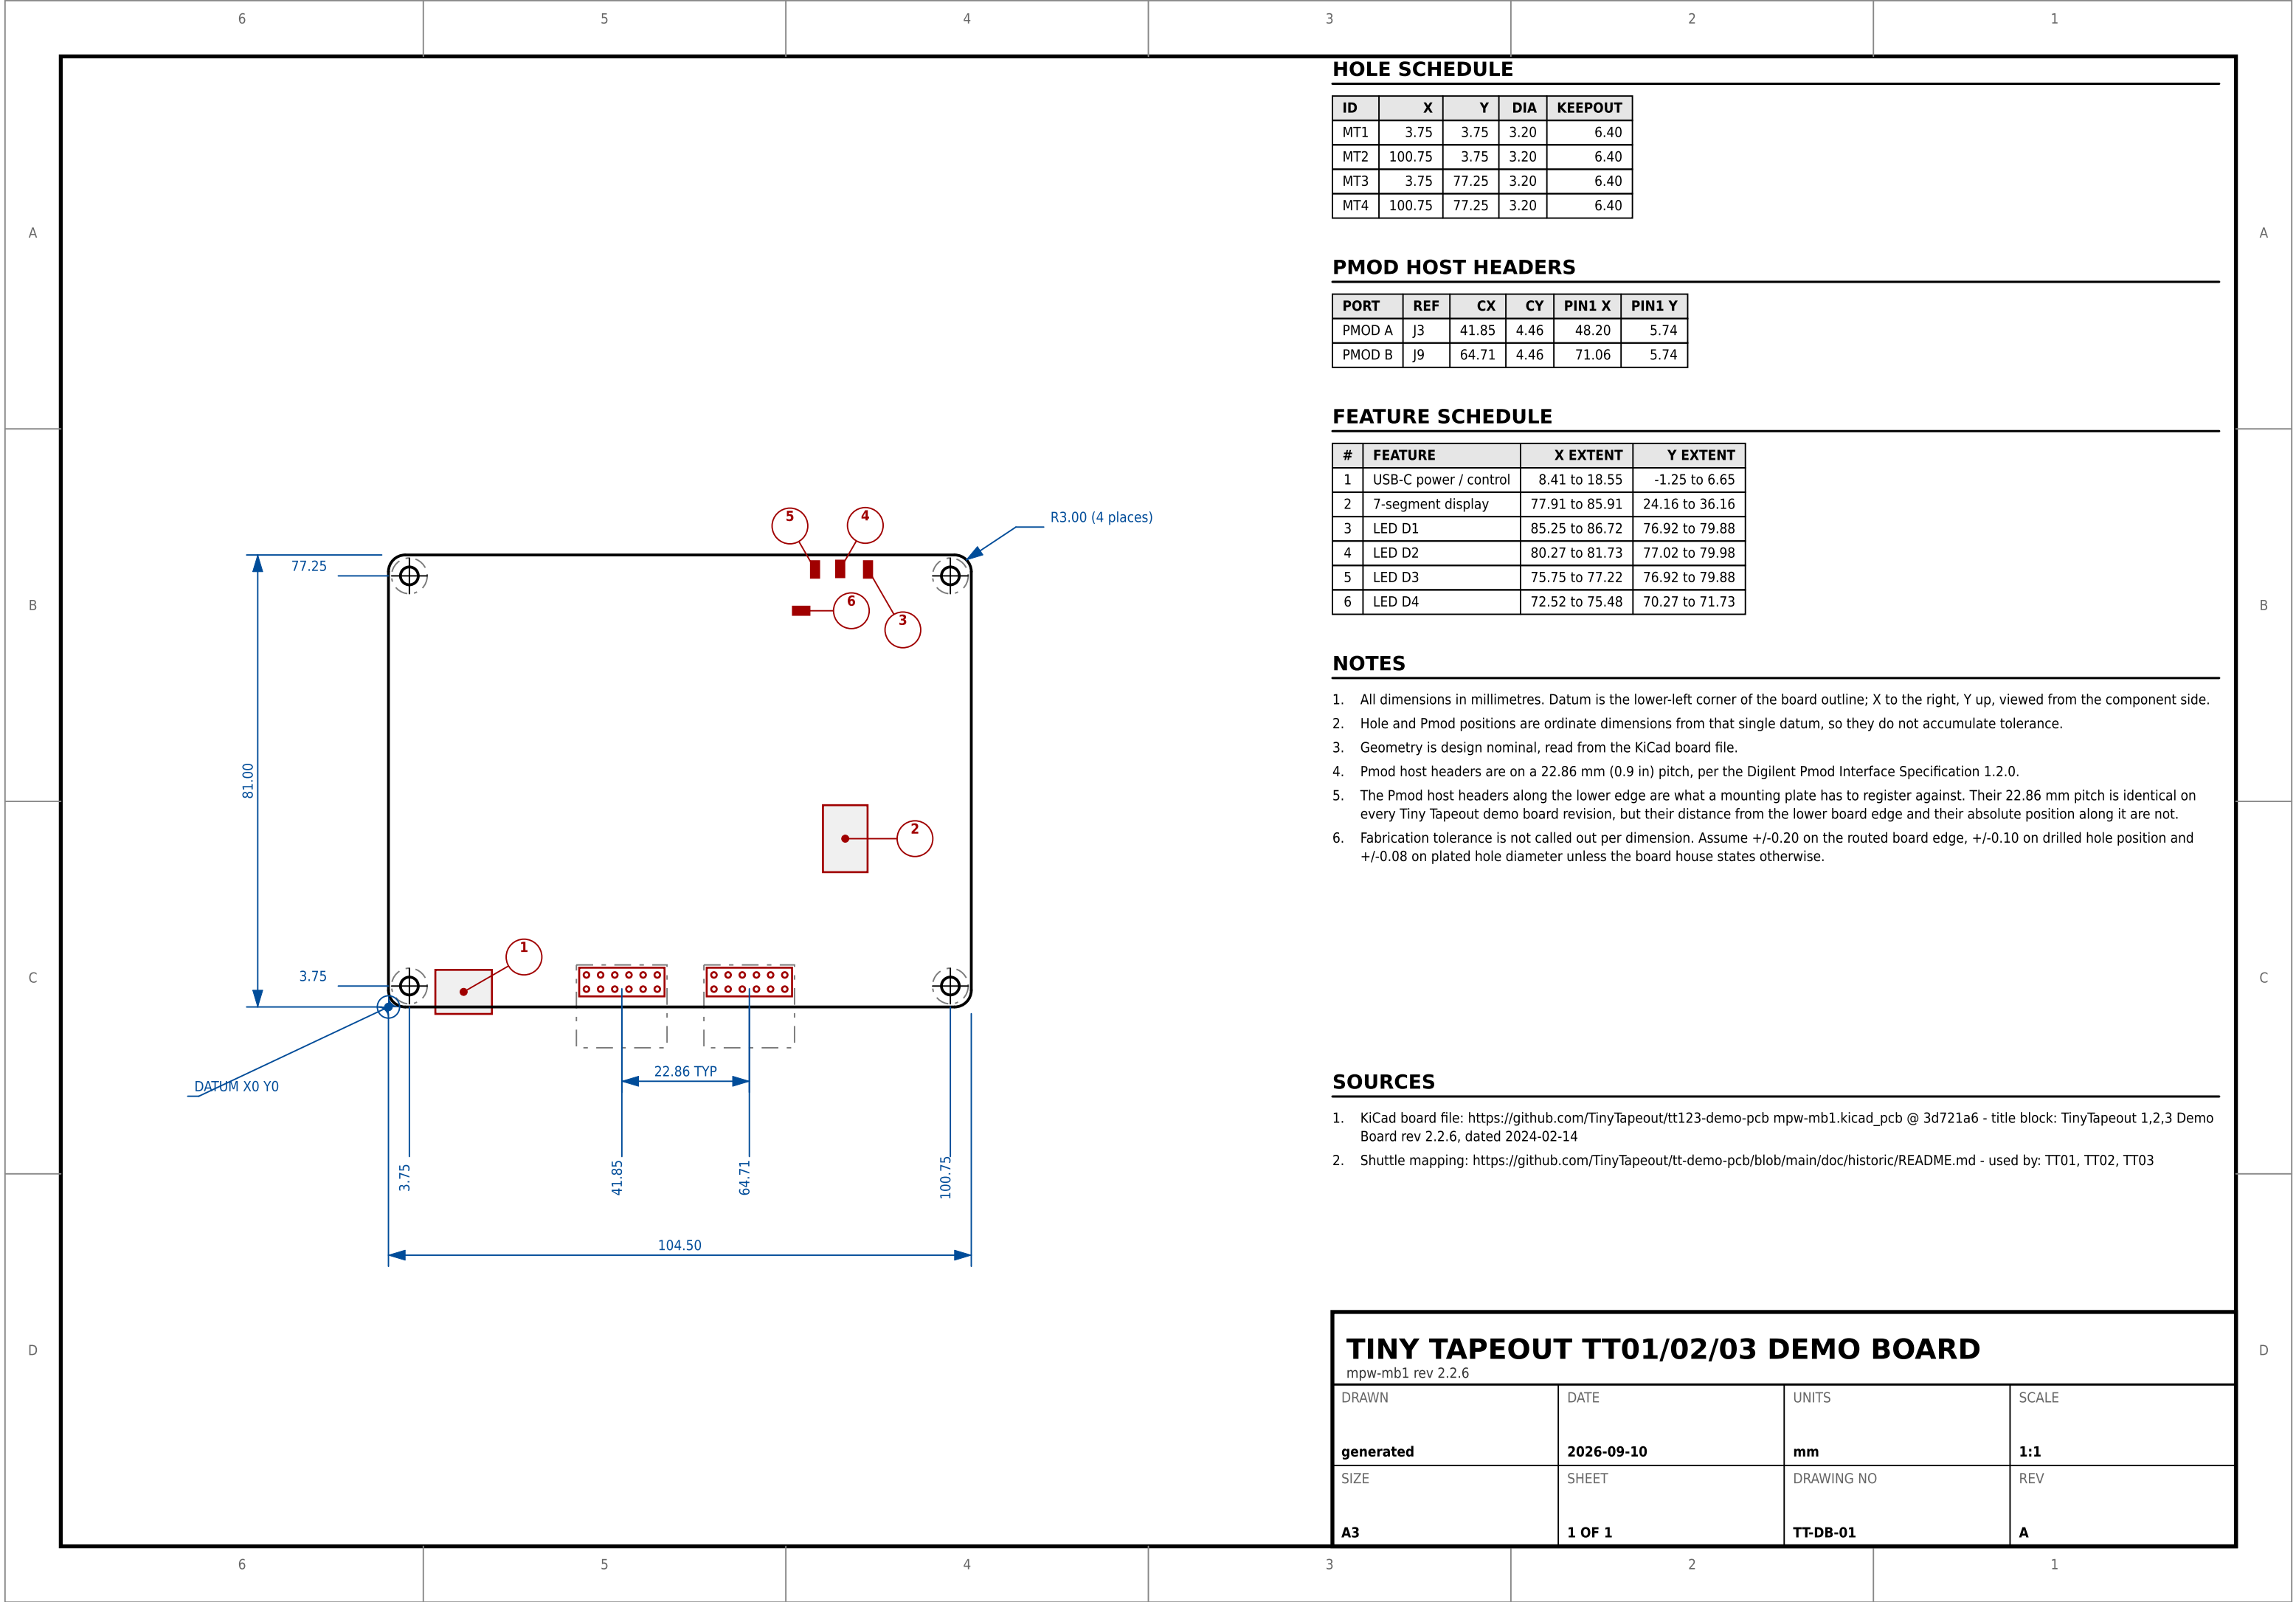

HOLE SCHEDULE

ID	X	Y	DIA	KEEPOUT
MT1	3.75	3.75	3.20	6.40
MT2	100.75	3.75	3.20	6.40
MT3	3.75	77.25	3.20	6.40
MT4	100.75	77.25	3.20	6.40

PMOD HOST HEADERS

PORT	REF	CX	CY	PIN1 X	PIN1 Y
PMOD A	J3	41.85	4.46	48.20	5.74
PMOD B	J9	64.71	4.46	71.06	5.74

FEATURE SCHEDULE

#	FEATURE	X EXTENT	Y EXTENT
1	USB-C power / control	8.41 to 18.55	-1.25 to 6.65
2	7-segment display	77.91 to 85.91	24.16 to 36.16
3	LED D1	85.25 to 86.72	76.92 to 79.88
4	LED D2	80.27 to 81.73	77.02 to 79.98
5	LED D3	75.75 to 77.22	76.92 to 79.88
6	LED D4	72.52 to 75.48	70.27 to 71.73

NOTES

- All dimensions in millimetres. Datum is the lower-left corner of the board outline; X to the right, Y up, viewed from the component side.
- Hole and Pmod positions are ordinate dimensions from that single datum, so they do not accumulate tolerance.
- Geometry is design nominal, read from the KiCad board file.
- Pmod host headers are on a 22.86 mm (0.9 in) pitch, per the Digilent Pmod Interface Specification 1.2.0.
- The Pmod host headers along the lower edge are what a mounting plate has to register against. Their 22.86 mm pitch is identical on every Tiny Tapeout demo board revision, but their distance from the lower board edge and their absolute position along it are not.
- Fabrication tolerance is not called out per dimension. Assume +/-0.20 on the routed board edge, +/-0.10 on drilled hole position and +/-0.08 on plated hole diameter unless the board house states otherwise.

SOURCES

- KiCad board file: <https://github.com/TinyTapeout/tt123-demo-pcb> mpw-mb1.kicad_pcb @ 3d721a6 - title block: TinyTapeout 1,2,3 Demo Board rev 2.2.6, dated 2024-02-14
- Shuttle mapping: <https://github.com/TinyTapeout/tt-demo-pcb/blob/main/doc/historic/README.md> - used by: TT01, TT02, TT03

TINY TAPEOUT TT01/02/03 DEMO BOARD

mpw-mb1 rev 2.2.6

DRAWN	DATE	UNITS	SCALE
generated	2026-09-10	mm	1:1
SIZE	SHEET	DRAWING NO	REV
A3	1 OF 1	TT-DB-01	A