


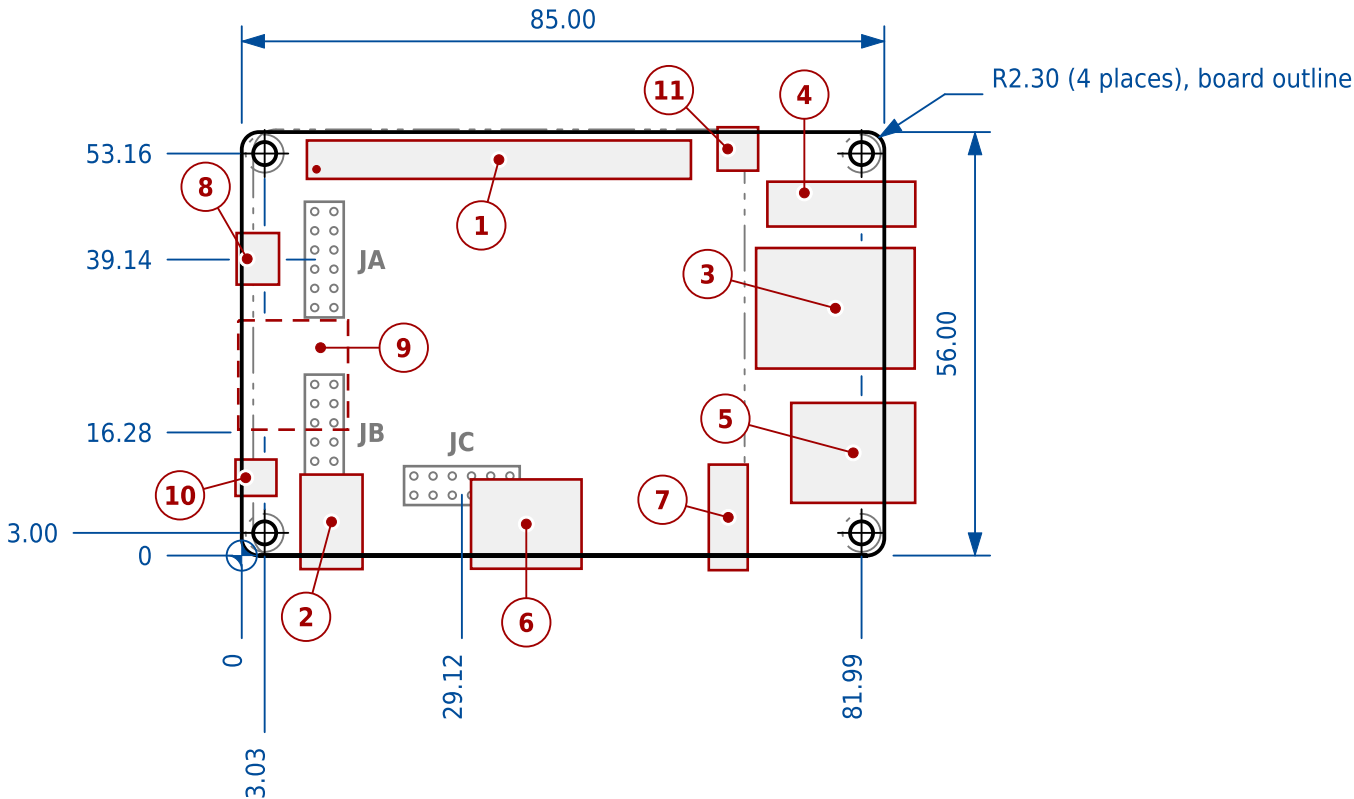

HOLE SCHEDULE

ID	X mm	Y mm	DIA mm	KEEPOUT mm
MT1	3.03	3.00	3.05 +/-0.15	5.03
MT2	81.99	3.00	3.05 +/-0.15	5.03
MT3	3.03	53.16	3.05 +/-0.15	5.03
MT4	81.99	53.16	3.05 +/-0.15	5.03

FEATURE SCHEDULE

#	FEATURE	X EXTENT mm	Y EXTENT mm
1	40-pin GPIO header	8.62 to 59.42	49.81 to 54.89
2	DC 5 V input, barrel jack	7.77 to 15.98	-1.79 to 10.71
3	Ethernet RJ45	68.04 to 89.02	24.73 to 40.67
4	USB 2.0 type A, single, upright	69.53 to 89.10	43.51 to 49.44
5	USB 2.0 type A pair	72.69 to 89.08	6.97 to 20.19
6	HDMI	30.33 to 44.95	-1.74 to 10.07
7	3.5 mm audio and video jack	61.78 to 66.93	-1.93 to 12.03
8	Micro-USB OTG	-0.68 to 4.93	35.83 to 42.65
9	MicroSD socket, underside	-0.46 to 14.06	16.65 to 31.10
10	Power button	-0.83 to 4.59	7.89 to 12.70
11	IR receiver	62.94 to 68.31	50.90 to 56.64

PMOD HAT ADAPTER HOSTS

PORT	EDGE	CX mm	CY mm	PIN1 X mm	PIN1 Y mm
JA	left edge	10.920	39.140	9.650	45.490
JB	left edge	10.920	16.280	9.650	22.630
JC	bottom edge	29.120	9.250	22.770	7.980

LEGEND

- Board outline
- Component body, scheduled
- On the underside, seen through the board
- Adjacent part, hole keep-out
- Dimension, extension and leader

NOTES

- Viewed from the component side.
- Phantom outline is the Digilent Pmod HAT Adapter fitted on the 40-pin GPIO header; its mounting holes miss this board's by 2.0 mm or more, so no standoff can join the two.
- Xunlong publish no drawing of this board. Everything but its size is MEASURED from the photographs listed, good to +/-0.4 mm for holes and header and +/-1.1 mm for the parts: no photograph's reading, and no check on the holes and header, is further than that from what is drawn.
- Across the board the scale is the 40-pin header's 2.54 mm pitch. Fitted to the board's edges alone, the photographs came out 0.6 % wide.
- Xunlong's manual and specification table give 85 x 55 mm. The photographs measure 55.7 to 57.1 mm, and Xunlong's own dimensioned photograph and drawing of the PC Plus say 56.
- Each part is the mean of every photograph that shows it, top face from above and overhang from below; raspberry_pi/orangepi_pc.py records every reading.
- The dot is pin 1 of the 40-pin header. KEEPOUT is the copper ring round each hole.
- Plan only: no height is measured, nor how far a microSD card stands out of its socket.

NOTES (continued)

- The 40-pin header is 1.52 mm right of and 0.15 mm below a Raspberry Pi's, and the Pmod HAT Adapter moves with it. Which parts clear the adapter's underside is not established: no heights are measured.
- Pmod HAT Adapter host positions are DERIVED, good to about +/-0.75 mm; drawing ACC-HAT-PMOD has the derivation.
- Assembled envelope, connector overhang included: 89.93 x 58.57 mm.
- Corner radius measured 1.7 to 2.4 mm, drawn at the median.

SOURCES

- Board size: orangepi.org/html/hardWare/computerAndMicrocontrollers/details/Orange-Pi-PC.html - Xunlong's product page: its dimensioned photograph says 85 by 56 mm, its specification table 85 x 55. No other mechanical figure is published.
- Photographs, v1.3: linux-sunxi.org/Xunlong_Orange_Pi_PC, [Orange_Pi_PC_v1.3_front.jpg](#) and [_back.jpg](#) - Fetched from the Wayback Machine's January 2026 capture.
- Photographs, v1.2: orangepi.org/img/computersAndMmicrocontrollers/PC40.png and [PC/Rectangle 641.png](#) - Xunlong's product page.
- Measurement: [raspberrypi/measure_orangepi_pc.py](#) - Held against other models of the board by [raspberrypi/verify_orangepi_pc.py](#).

XUNLONG ORANGE PI PC

Allwinner H3, v1.2 and v1.3, 85 x 56 mm

DRAWN	VERSION	UNITS	SCALE
generated	v0.0-400-g80d77dd	mm	1:1
SIZE	SHEET	DRAWING NO	REV
A3	1 OF 1	RPI-OIPPC	A
MATERIAL	GENERAL TOLERANCE		
PCB, thickness not stated	MEASURED: holes, header +/-0.4 parts +/-1.1		