


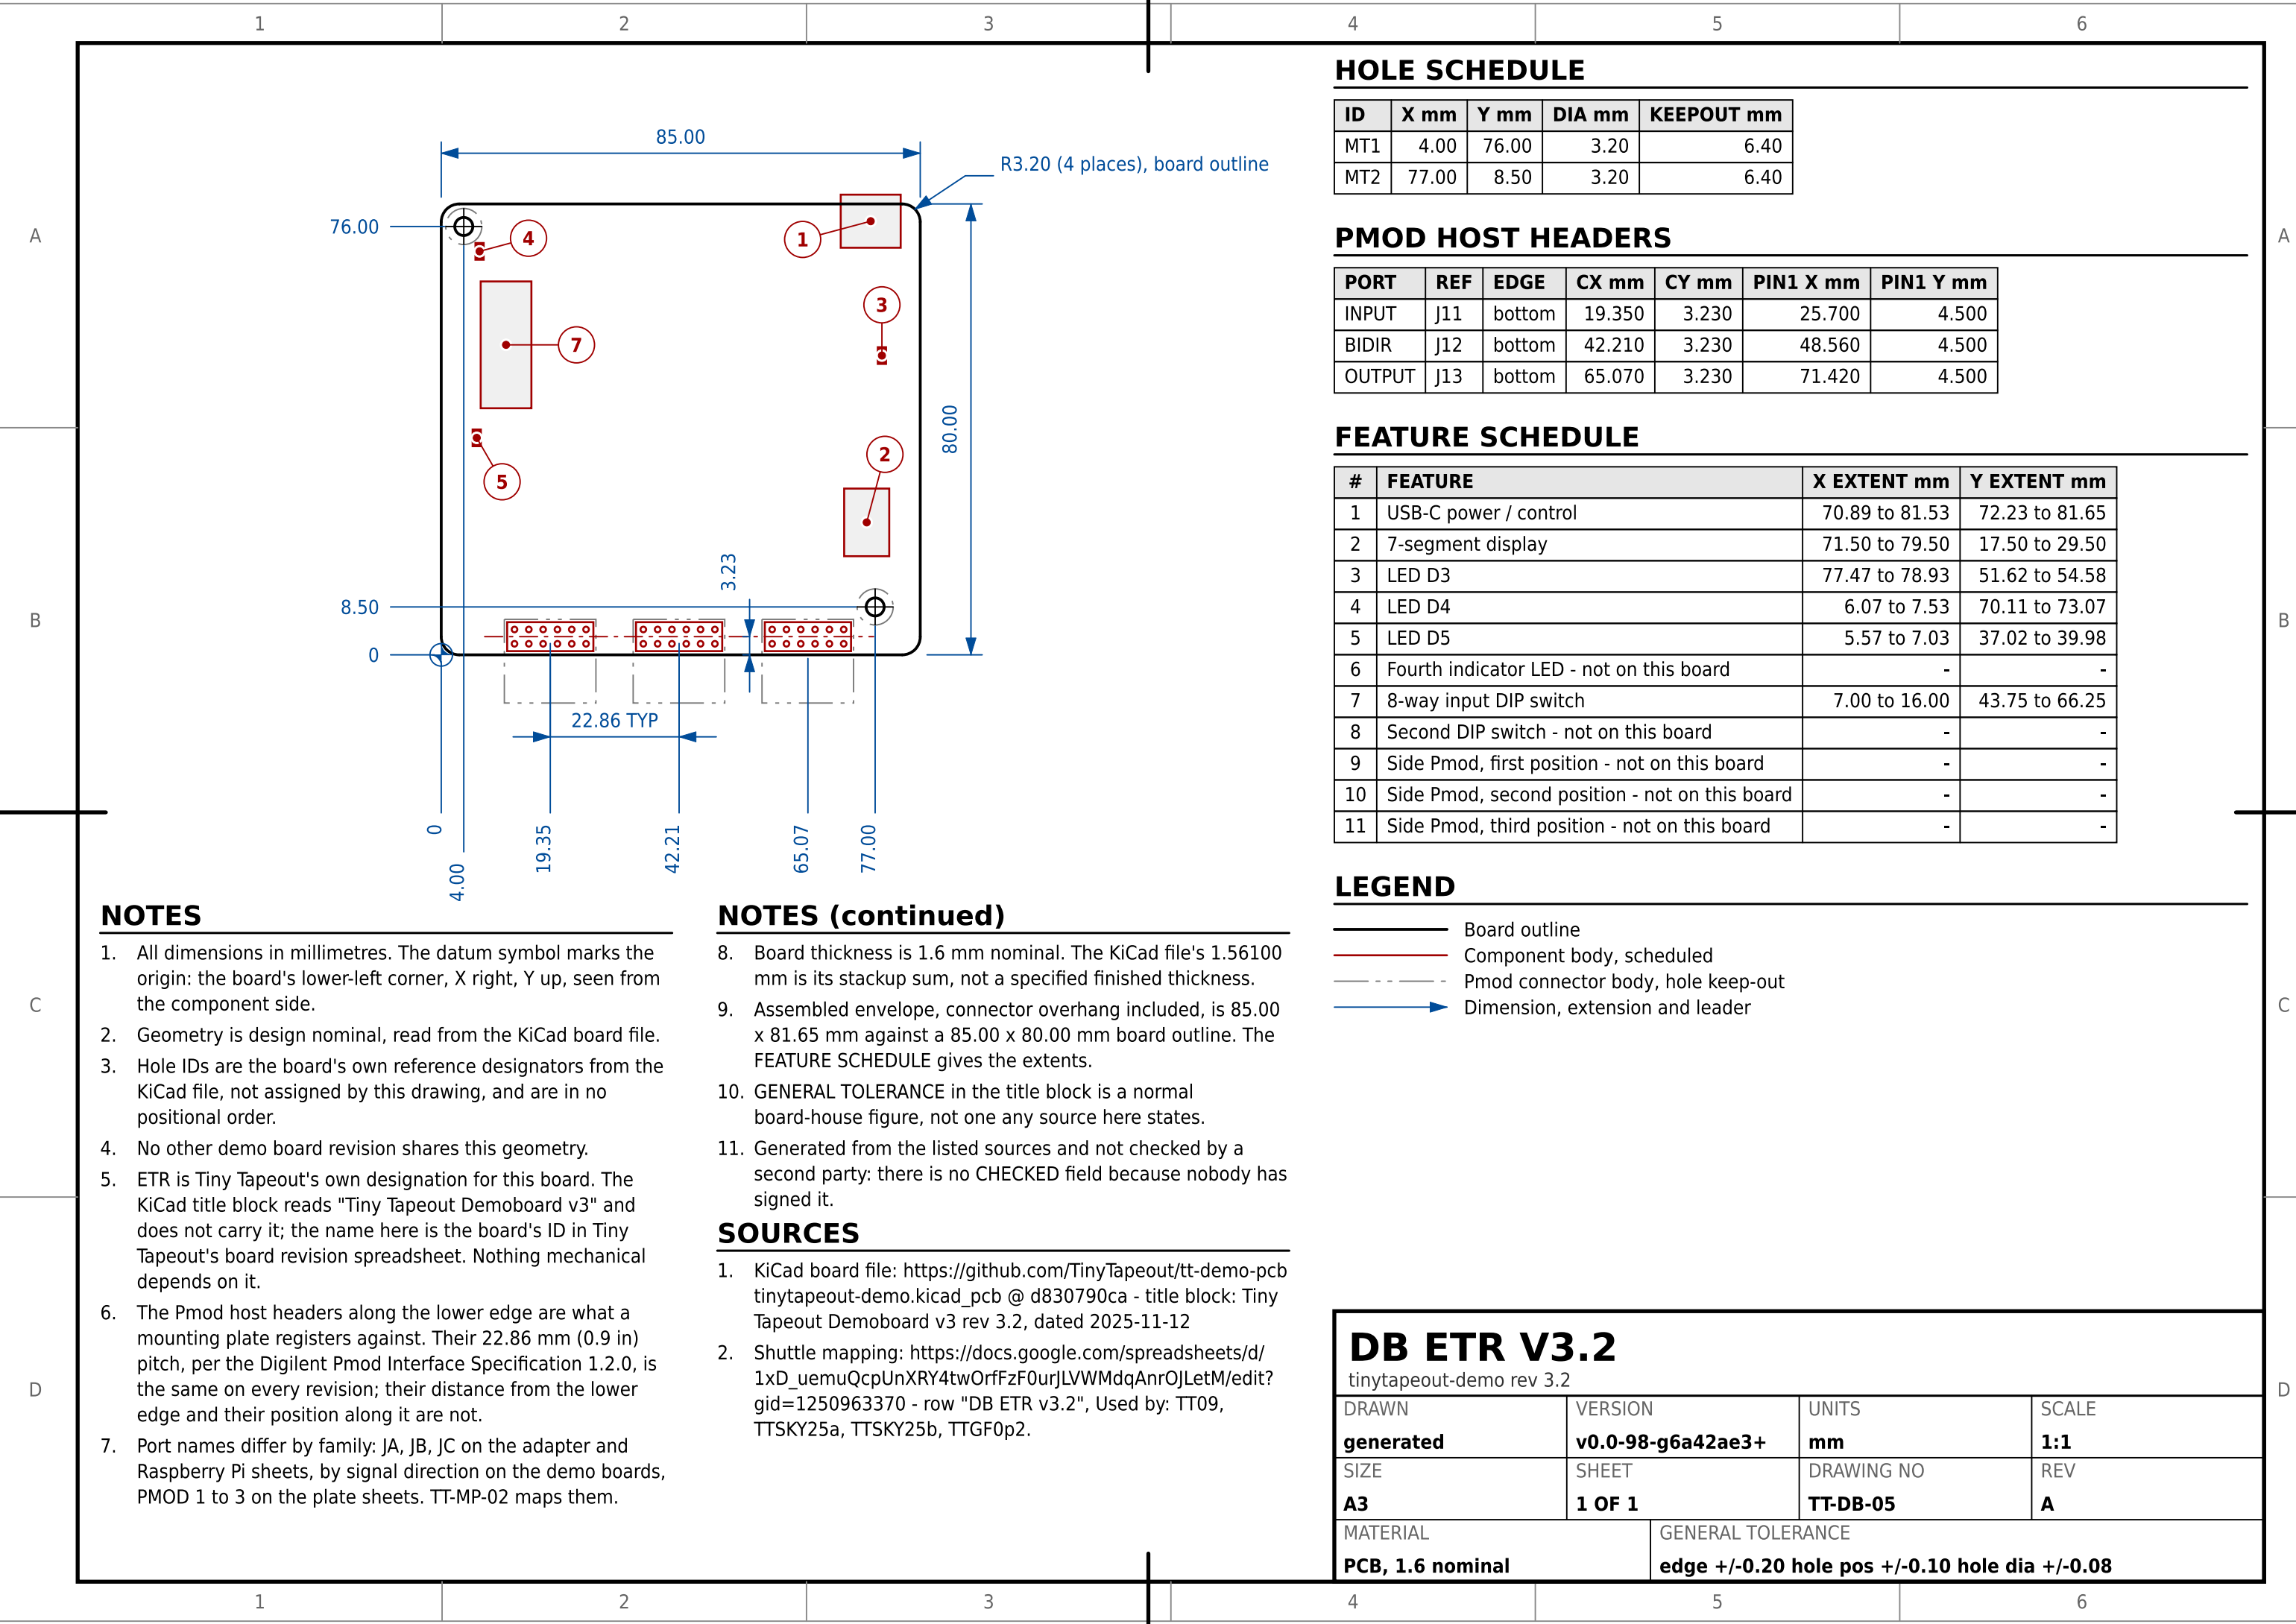

HOLE SCHEDULE

ID	X mm	Y mm	DIA mm	KEEPOUT mm
MT1	4.00	76.00	3.20	6.40
MT2	77.00	8.50	3.20	6.40

PMOD HOST HEADERS

PORT	REF	EDGE	CX mm	CY mm	PIN1 X mm	PIN1 Y mm
INPUT	J11	bottom	19.350	3.230	25.700	4.500
BIDIR	J12	bottom	42.210	3.230	48.560	4.500
OUTPUT	J13	bottom	65.070	3.230	71.420	4.500

FEATURE SCHEDULE

#	FEATURE	X EXTENT mm	Y EXTENT mm
1	USB-C power / control	70.89 to 81.53	72.23 to 81.65
2	7-segment display	71.50 to 79.50	17.50 to 29.50
3	LED D3	77.47 to 78.93	51.62 to 54.58
4	LED D4	6.07 to 7.53	70.11 to 73.07
5	LED D5	5.57 to 7.03	37.02 to 39.98
6	Fourth indicator LED - not on this board	-	-
7	8-way input DIP switch	7.00 to 16.00	43.75 to 66.25
8	Second DIP switch - not on this board	-	-
9	Side Pmod, first position - not on this board	-	-
10	Side Pmod, second position - not on this board	-	-
11	Side Pmod, third position - not on this board	-	-

LEGEND

- Board outline
- Component body, scheduled
- Pmod connector body, hole keep-out
- Dimension, extension and leader

DB ETR V3.2

tinytapeout-demo rev 3.2

DRAWN	VERSION	UNITS	SCALE
generated	v0.0-98-g6a42ae3+	mm	1:1
SIZE	SHEET	DRAWING NO	REV
A3	1 OF 1	TT-DB-05	A
MATERIAL		GENERAL TOLERANCE	
PCB, 1.6 nominal		edge +/-0.20 hole pos +/-0.10 hole dia +/-0.08	