


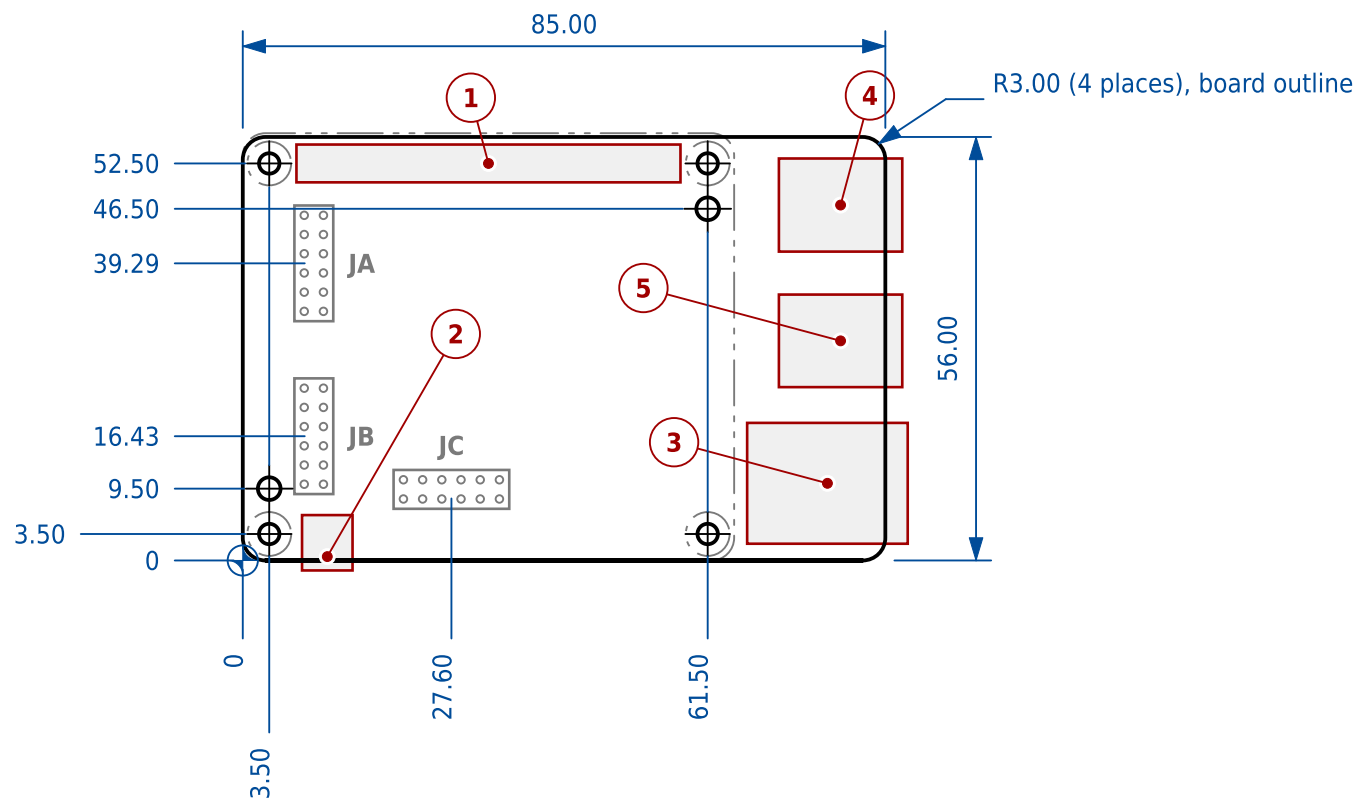

## NOTES

- Viewed from the component side.
- Phantom outline is the Digilent Pmod HAT Adapter fitted on the 40-pin GPIO header; its mounting holes coincide with this board's.
- Hole IDs are assigned by this drawing and mean the same hole on every Raspberry Pi sheet.
- The 40-pin GPIO header position is fixed by the Raspberry Pi HAT specification, so it is the same on every Raspberry Pi sheet.
- Design keep-outs to 6.2 mm diameter around every mounting hole, per the Raspberry Pi HAT specification; KEEPOUT gives what this model's own drawing shows.
- Pmod host JC overhangs the lower edge, over the HDMI and power connectors. Fit the two standoffs opposite the 40-pin header, as Digilent's manual warns, so JC's pins cannot touch the HDMI shell. HDMI connectors are not drawn.
- Pmod HAT Adapter host positions are DERIVED, good to about +/-0.75 mm; drawing ACC-01 has the derivation.

## NOTES (continued)

- Assembled envelope, connector overhang included: 87.96 x 57.32 mm.

## SOURCES

- Mechanical drawing: <https://datasheets.raspberrypi.com/rpi5/raspberry-pi-5-mechanical-drawing.pdf> - Raspberry Pi Ltd
- Mounting holes: <https://datasheets.raspberrypi.com/rpi5/raspberry-pi-5-mechanical-drawing.pdf> - Hole diameter dimensioned on the drawing as  $\varnothing 2.7$  mm; the keep-out circle is drawn and measures 5.80 mm.

## HOLE SCHEDULE

| ID   | X mm  | Y mm  | DIA mm | KEEPOUT mm |
|------|-------|-------|--------|------------|
| MT1  | 3.50  | 3.50  | 2.70   | 5.80       |
| MT2  | 61.50 | 3.50  | 2.70   | 5.80       |
| MT3  | 3.50  | 52.50 | 2.70   | 5.80       |
| MT4  | 61.50 | 52.50 | 2.70   | 5.80       |
| AUX1 | 3.50  | 9.50  | 3.00   | not given  |
| AUX2 | 61.50 | 46.50 | 3.00   | not given  |

## FEATURE SCHEDULE

| # | FEATURE                     | X EXTENT mm    | Y EXTENT mm    |
|---|-----------------------------|----------------|----------------|
| 1 | 40-pin GPIO header          | 7.10 to 57.90  | 50.00 to 55.00 |
| 2 | USB-C power input           | 7.84 to 14.52  | -1.32 to 6.00  |
| 3 | Ethernet RJ45               | 66.72 to 87.96 | 2.21 to 18.19  |
| 4 | USB 3.0 type A (upper pair) | 70.92 to 87.24 | 40.84 to 53.15 |
| 5 | USB 3.0 type A (lower pair) | 70.92 to 87.24 | 22.92 to 35.16 |

## PMOD HAT ADAPTER HOSTS

| PORT | EDGE        | CX mm  | CY mm  | PIN1 X mm | PIN1 Y mm |
|------|-------------|--------|--------|-----------|-----------|
| JA   | left edge   | 9.400  | 39.290 | 8.130     | 45.640    |
| JB   | left edge   | 9.400  | 16.430 | 8.130     | 22.780    |
| JC   | bottom edge | 27.600 | 9.400  | 21.250    | 8.130     |

## LEGEND

- Board outline
- Component body, scheduled
- Adjacent part, hole keep-out
- Dimension, extension and leader

## RASPBERRY PI 5

85 x 56 mm

|                           |                   |                                                |       |
|---------------------------|-------------------|------------------------------------------------|-------|
| DRAWN                     | VERSION           | UNITS                                          | SCALE |
| generated                 | v0.0-128-g69f311f | mm                                             | 1:1   |
| SIZE                      | SHEET             | DRAWING NO                                     | REV   |
| A3                        | 1 OF 1            | RPI-03                                         | A     |
| MATERIAL                  |                   | GENERAL TOLERANCE                              |       |
| PCB, thickness not stated |                   | edge +/-0.20 hole pos +/-0.10 hole dia +/-0.08 |       |