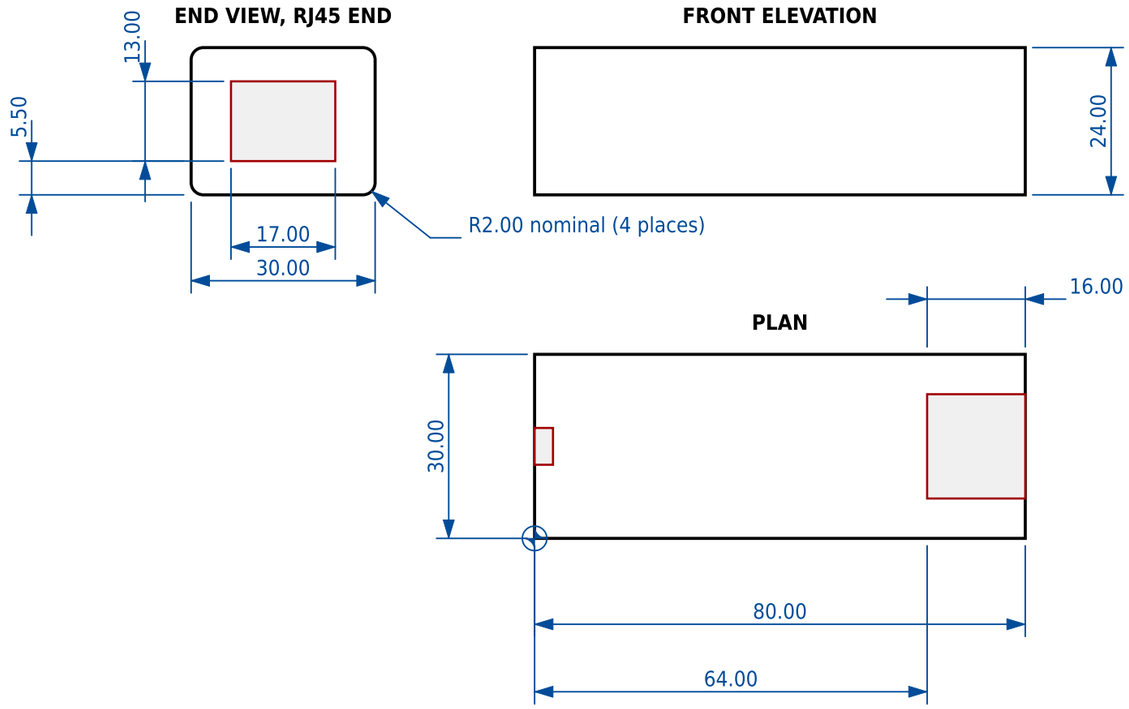


ENVELOPE

DIMENSION	mm
Overall length	80.00
Overall width	30.00
Overall height	24.00

FEATURES (PLAN VIEW)

FEATURE	X EXTENT mm	Y EXTENT mm
RJ45 PoE input, moulded into the body	64.00 to 80.00	6.50 to 23.50
Output cable exit	0.00 to 3.00	12.00 to 18.00

SOURCES

1. DSLRKIT active PoE splitter: https://www.amazon.com/DSLRKIT-Active-Splitter-Ethernet-Raspberry/dp/B01H37XQP8 - Vendor text: "Body size: 80 x 27 x 22 mm", weight 55 g, DC cable 165 mm, RJ45 plug cable 155 mm.
2. Adafruit 3785, equivalent unit: https://www.adafruit.com/product/3785 - "Body dimensions: 80mm x 30mm x 24mm", weight 54.1 g, each lead 205 mm.
3. AliExpress listings: AliExpress items 1005006389914897, 1005005523161215, 1005009263116567 - Most listings quote packaging rather than body size. The one plausible body figure seen was 95 x 28 x 24 mm, for a gigabit variant in a longer case.

NOTES

1. All dimensions in millimetres. The datum symbol on the plan marks the origin: the lower-left corner of the body envelope, X along the length, Y across the width, Z up.
2. First-angle projection. The plan is the view from above, placed below the front elevation; the end view is the view from the RJ45 end, placed to the left of it.
3. The RJ45 aperture drawn in the end view is a standard 8P8C jack envelope, positioned centrally because the vendor does not dimension it. Its size and position are indicative to about +/-1.5 mm; the body envelope itself is the dimension to trust.
4. The corner radius is nominal. It belongs to the body cross-section, so it appears in the end view only.
5. NO SINGLE OFFICIAL SOURCE. These are near-identical clones from several factories. Two independent sources agree on an 80 mm long body: DSLRKIT quote 80 x 27 x 22 mm and Adafruit measure 80 x 30 x 24 mm.

NOTES (continued)

6. The envelope drawn here is the larger of those two, 80 x 30 x 24 mm. Design any cradle to that, and allow for gigabit variants in a longer case, up to about 95 mm.
7. No mounting holes: the case is a glued plastic clamshell, so a bracket has to clamp or strap the body.

GENERIC POE SPLITTER TO MICRO-USB

IEEE 802.3af, 5 V output, sealed plastic body

DRAWN	DATE	UNITS	SCALE
generated	**2026-09-10**	**mm**	**1:1**
SIZE	SHEET	DRAWING NO	REV
A3	**1 OF 1**	**ACC-03**	**A**
MATERIAL	GENERAL TOLERANCE		PROJECTION
sealed enclosure	**envelope +/-1.0 unless noted**		