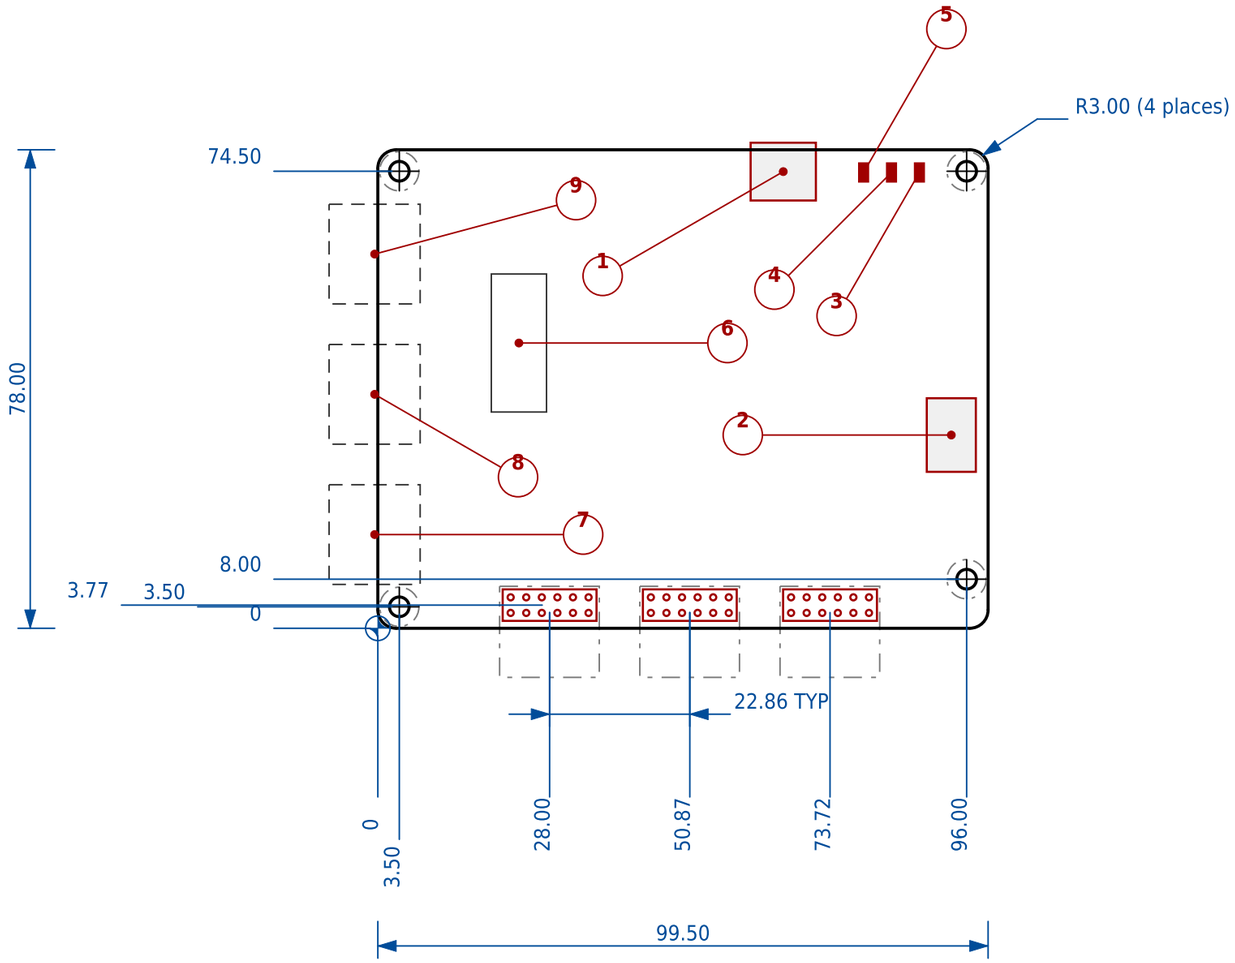


HOLE SCHEDULE

ID	X mm	Y mm	DIA mm	KEEPOUT mm
MT1	3.50	3.50	3.20	6.40
MT2	96.00	8.00	3.20	6.40
MT3	3.50	74.50	3.20	6.40
MT4	96.00	74.50	3.20	6.40

PMOD HOST HEADERS

PORT	REF	EDGE	CX mm	CY mm	PIN1 X mm	PIN1 Y mm
INPUT	J3	bottom	28.00	3.77	34.35	5.04
BIDIR	J5	bottom	50.87	3.77	57.22	5.04
OUTPUT	J6	bottom	73.72	3.77	80.08	5.04

FEATURE SCHEDULE

#	FEATURE	X EXTENT mm	Y EXTENT mm
1	USB-C power / control	60.78 to 71.42	69.73 to 79.15
2	7-segment display	89.50 to 97.50	25.50 to 37.50
3	LED D1	87.57 to 89.03	72.82 to 75.78
4	LED D2	83.02 to 84.48	72.82 to 75.78
5	LED D3	78.47 to 79.93	72.82 to 75.78
6	8-way input DIP switch	18.50 to 27.50	35.25 to 57.75
7	Side Pmod J12 (not fitted)	-7.95 to 6.90	7.15 to 23.40
8	Side Pmod J13 (not fitted)	-7.95 to 6.90	30.01 to 46.26
9	Side Pmod J14 (not fitted)	-7.95 to 6.90	52.87 to 69.12

NOTES

1. All dimensions in millimetres. The datum symbol marks the origin: the lower-left corner of the board outline, X right, Y up, viewed from the component side.
2. Geometry is design nominal, read from the KiCad board file.
3. No other demo board revision shares this geometry.
4. Pmod host headers are on a 22.86 mm (0.9 in) pitch, per the Digilent Pmod Interface Specification 1.2.0.
5. The Pmod host headers along the lower edge are what a mounting plate has to register against. Their 22.86 mm pitch is identical on every Tiny Tapeout demo board revision, but their distance from the lower board edge and their absolute position along it are not.

SOURCES

1. KiCad board file: https://github.com/TinyTapeout/tt-demo-pcb tinytapeout-demo.kicad_pcb @ 028a51b1e - title block: TinyTapeout 06+ Demoboard rev 2.1.2, dated 2025-02-11
2. Shuttle mapping: https://github.com/TinyTapeout/tt-demo-pcb/blob/main/doc/historic/README.md - used by: TT08

TINY TAPEOUT 06+ DEMO BOARD

tinytapeout-demo rev 2.1.2

DRAWN	DATE	UNITS	SCALE
generated	**2026-09-10**	**mm**	**1:1**
SIZE	SHEET	DRAWING NO	REV
A3	**1 OF 1**	**TT-DB-06**	**A**
MATERIAL	GENERAL TOLERANCE		PROJECTION
PCB	**edge +/-0.20 hole pos +/-0.10 hole dia +/-0.08**		