


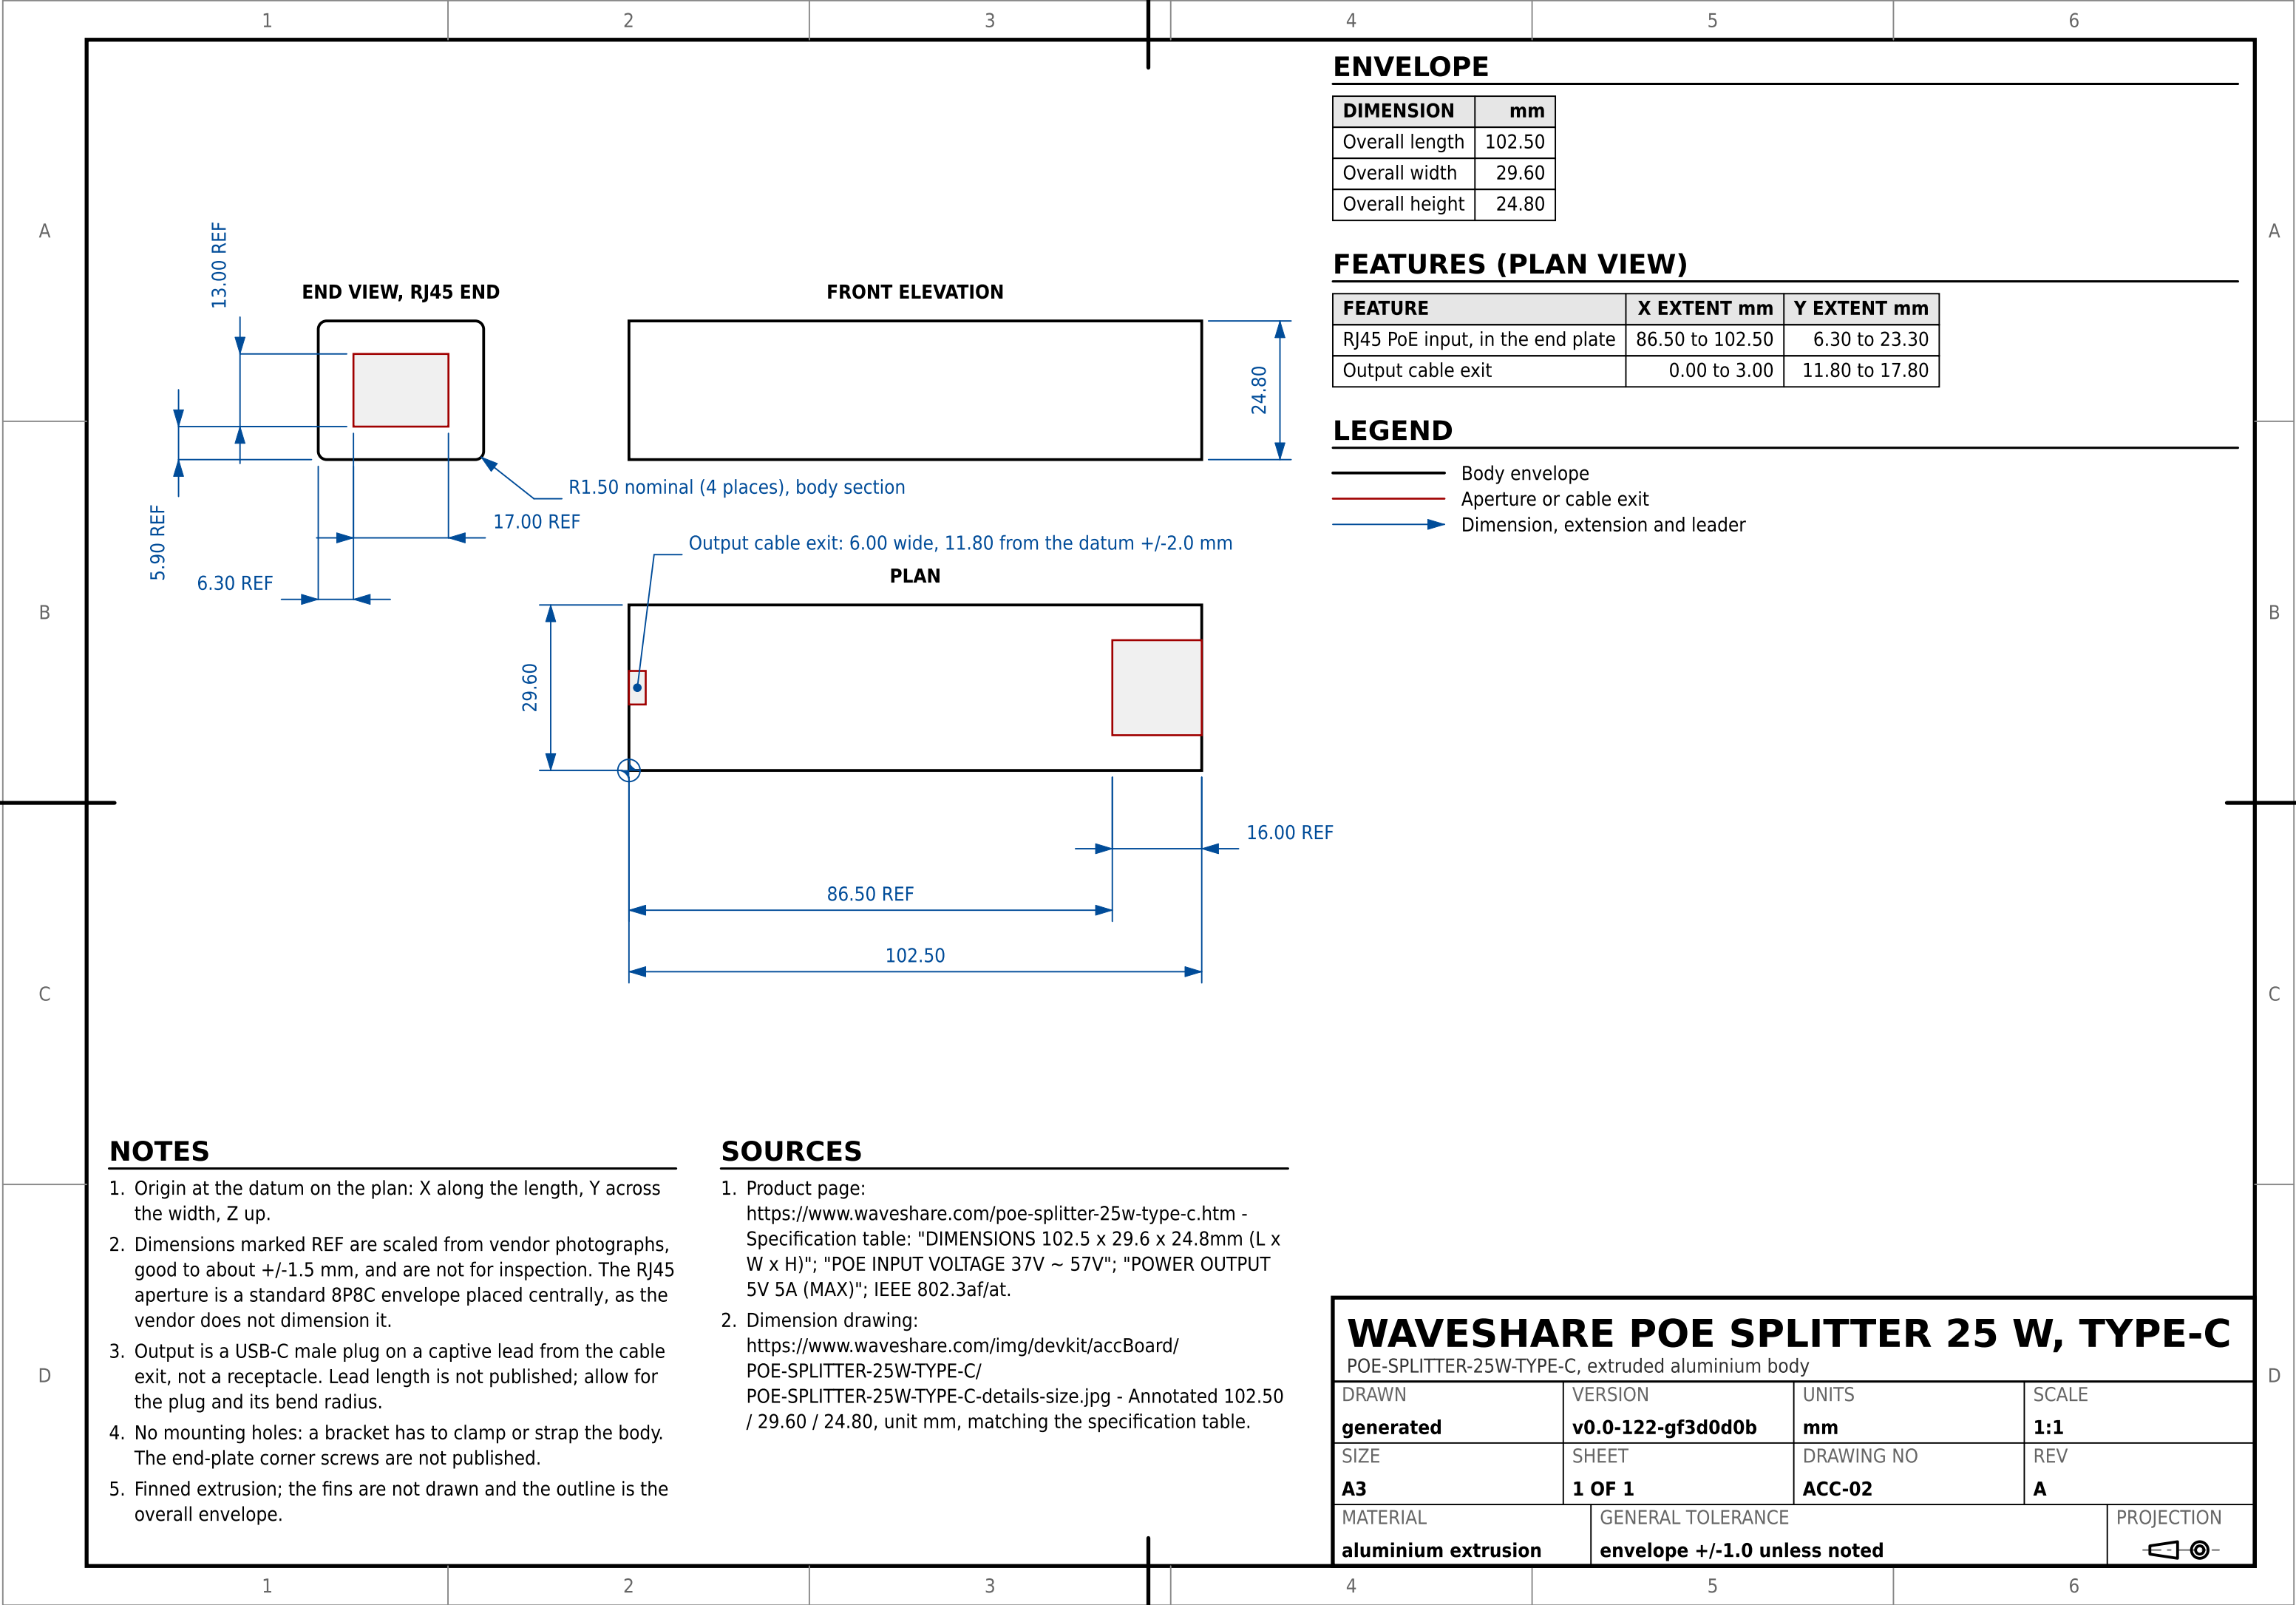

ENVELOPE

DIMENSION	mm
Overall length	102.50
Overall width	29.60
Overall height	24.80

FEATURES (PLAN VIEW)

FEATURE	X EXTENT mm	Y EXTENT mm
RJ45 PoE input, in the end plate	86.50 to 102.50	6.30 to 23.30
Output cable exit	0.00 to 3.00	11.80 to 17.80

LEGEND

	Body envelope
	Aperture or cable exit
	Dimension, extension and leader

NOTES

- Origin at the datum on the plan: X along the length, Y across the width, Z up.
- Dimensions marked REF are scaled from vendor photographs, good to about +/-1.5 mm, and are not for inspection. The RJ45 aperture is a standard 8P8C envelope placed centrally, as the vendor does not dimension it.
- Output is a USB-C male plug on a captive lead from the cable exit, not a receptacle. Lead length is not published; allow for the plug and its bend radius.
- No mounting holes: a bracket has to clamp or strap the body. The end-plate corner screws are not published.
- Finned extrusion; the fins are not drawn and the outline is the overall envelope.

SOURCES

- Product page:
<https://www.waveshare.com/poe-splitter-25w-type-c.htm> - Specification table: "DIMENSIONS 102.5 x 29.6 x 24.8mm (L x W x H)"; "POE INPUT VOLTAGE 37V ~ 57V"; "POWER OUTPUT 5V 5A (MAX)"; IEEE 802.3af/at.
- Dimension drawing:
<https://www.waveshare.com/img/devkit/accBoard/POE-SPLITTER-25W-TYPE-C/POE-SPLITTER-25W-TYPE-C-details-size.jpg> - Annotated 102.50 / 29.60 / 24.80, unit mm, matching the specification table.

WAVESHARE POE SPLITTER 25 W, TYPE-C

POE-SPLITTER-25W-TYPE-C, extruded aluminium body

DRAWN	VERSION	UNITS	SCALE
generated	v0.0-122-gf3d0d0b	mm	1:1
SIZE	SHEET	DRAWING NO	REV
A3	1 OF 1	ACC-02	A
MATERIAL	GENERAL TOLERANCE		PROJECTION
aluminium extrusion	envelope +/-1.0 unless noted		