


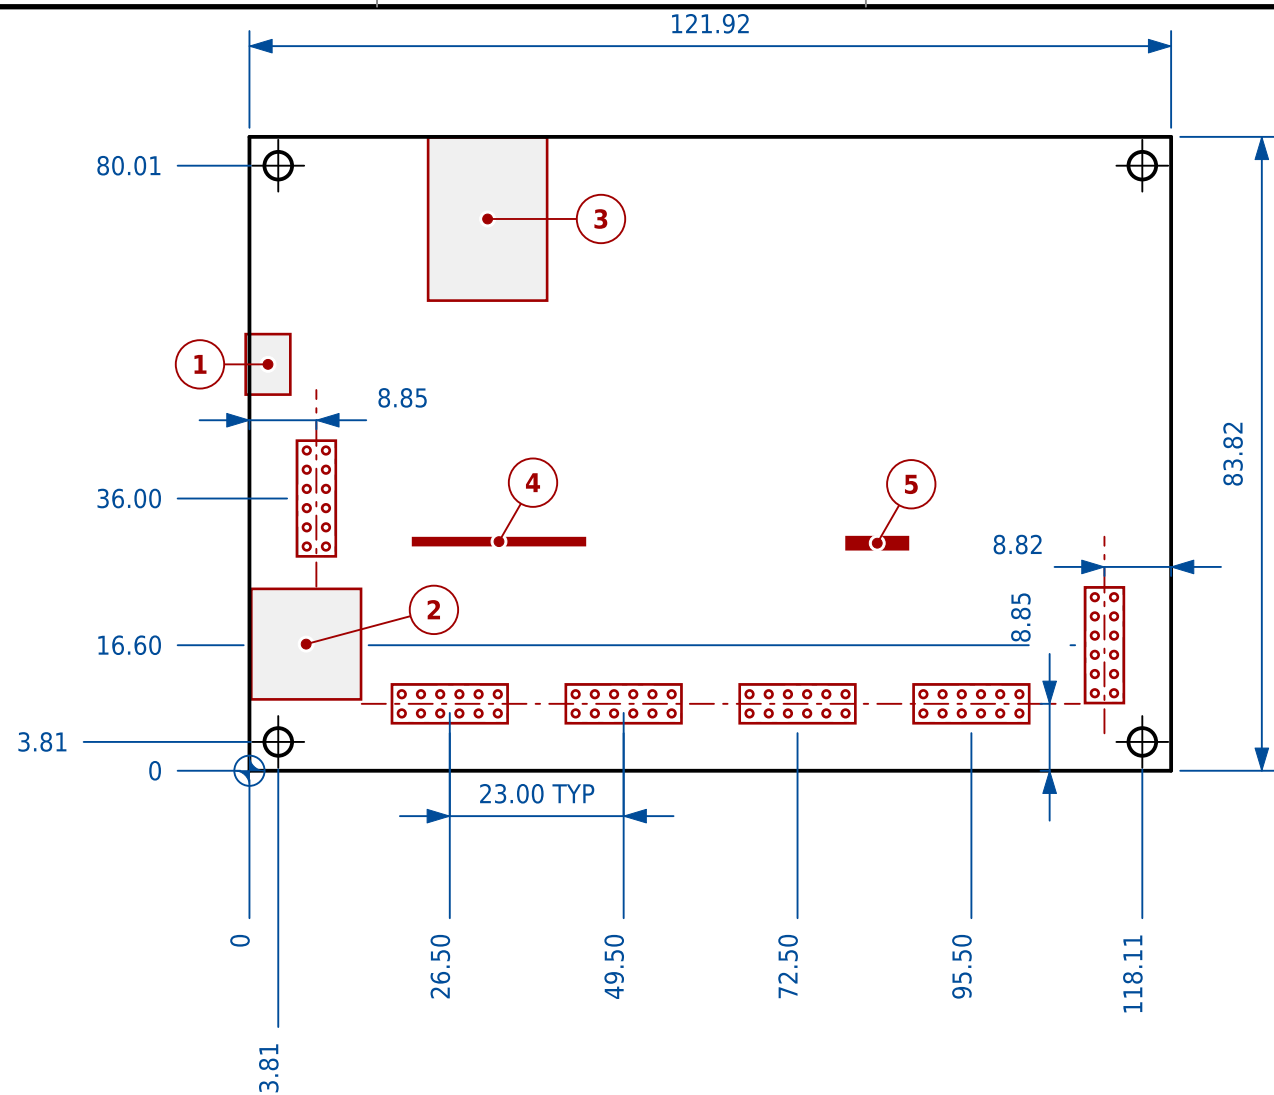

NOTES

1. Viewed from the component side.
2. Hole IDs are this drawing's; the DXF names nothing.
3. Pin rows 2.50 mm apart on the drawing, not 2.54; the host pitch dimensioned below is not the specification's 22.86 (0.90 in).
4. Drawn fully fitted, as the Zybo Z7-20; the Z7-10 leaves Pmod JB and one tri-colour LED off the same board.
5. J10, a micro-AB USB socket UNDER J11, projects 2.72 mm below the board and 0.82 past the left edge; C250, under the Ethernet jack, goes deepest at 3.10.
6. HDMI, audio, Pcam, microSD, the power jack and external JTAG are not marked, so the envelope below counts only what is drawn; the model's, with the audio jacks 1.71 past the right edge, is 124.44 x 83.90.
7. Bodies read from the PDF plot are good to about +/-0.3 mm.

NOTES (continued)

8. Assembled envelope, connector overhang included: 122.42 x 83.82 mm.

SOURCES

1. Mechanical drawing: https://digilent.com/reference/_media/reference/programmable-logic/zybo-z7/zybo_z7_dimensions.zip - Digilent, "Zybo Z7 Mechanical Drawings", dated 2020-09-03. Edge, holes, pin fields, pegs and shell pads from the DXF; bodies from the PDF plot, its scale recovered from the outline per axis (the two agree to 0.20 %).
2. 3D model: https://files.digilent.com/resources/programmable-logic/zybo-z7/Zybo_Z7.step - Digilent, Zybo_Z7.step, in the drawing's frame: its solids carry the designators, so they name the plot's outlines. Laminate 1.571 mm.

SOURCES (continued)

3. Reference manual: https://digilent.com/reference/_media/reference/programmable-logic/zybo-z7/zybo-z7_rm.pdf - Revised 2018-02-21, section 16: JA is the XADC port, JB, JC and JD high-speed, JE standard, JF the MIO port; four user LEDs, and "the Zybo Z7-10 only has one tri-color LED".
4. Schematic: <https://files.digilent.com/resources/programmable-logic/zybo-z7/zybo-z7-d1-sch.pdf> - Revision D.1: J12 is the micro-USB PROG/UART port, J11 the "USB A" host and J10 a "USB Micro AB" beneath it.
5. Resource Center: <https://digilent.com/reference/programmable-logic/zybo-z7/start-Physical>, quoted: "Width 3.3 in (88 mm)" and "Length 4.8 in (122 mm)"; the drawing gives 121.92 x 83.82, exactly 4.8 x 3.3 in. Its top view of the board has 3V3 and GND silkscreened at each host's end farthest from pin 1.

HOLE SCHEDULE

ID	X mm	Y mm	DIA mm	KEEPOUT mm
MT1	3.81	3.81	3.66	not given
MT2	118.11	3.81	3.66	not given
MT3	3.81	80.01	3.66	not given
MT4	118.11	80.01	3.66	not given

PMOD HOST HEADERS

PORT	EDGE	CX mm	CY mm	PIN1 X mm	PIN1 Y mm
JA	right	113.100	16.600	111.850	22.950
JB	bottom	95.500	8.850	101.850	10.100
JC	bottom	72.500	8.850	78.850	10.100
JD	bottom	49.500	8.850	55.850	10.100
JE	bottom	26.500	8.850	32.850	10.100
JF	left	8.850	36.000	10.100	29.650

FEATURE SCHEDULE

#	FEATURE	X EXTENT mm	Y EXTENT mm
1	micro-USB J12, programming and console	-0.50 to 5.41	49.74 to 57.74
2	USB type A host port J11	0.24 to 14.76	9.44 to 24.05
3	Ethernet RJ45 J3	23.63 to 39.38	62.17 to 83.75
4	LEDs LD0-LD3, 4 on 7.00 mm pitch	21.65 to 44.37	29.84 to 30.76
5	Tri-colour LEDs LD5 and LD6, 2 on 6.50 mm pitch	78.99 to 87.10	29.29 to 30.89
6	Expansion connector, first - not on this board	-	-
7	Expansion connector, second - not on this board	-	-
8	Expansion connector, third - not on this board	-	-
9	Third USB port - not on this board	-	-
10	Fourth USB port - not on this board	-	-
11	Status LEDs, debug controller - not on this board	-	-

LEGEND

- Board outline
- Component body, scheduled
- Pmod connector body
- Dimension, extension and leader

DIGILENT ZYBO Z7

Z7-10 and Z7-20

DRAWN	VERSION	UNITS	SCALE
generated	v0.0-430-gbfb1b8f	mm	1:1
SIZE	SHEET	DRAWING NO	REV
A3	1 OF 1	FPGA-ZYBO-Z7	A
MATERIAL	GENERAL TOLERANCE		
PCB, 1.6 nominal	edge +/-0.20 hole pos +/-0.10 hole dia +/-0.08		