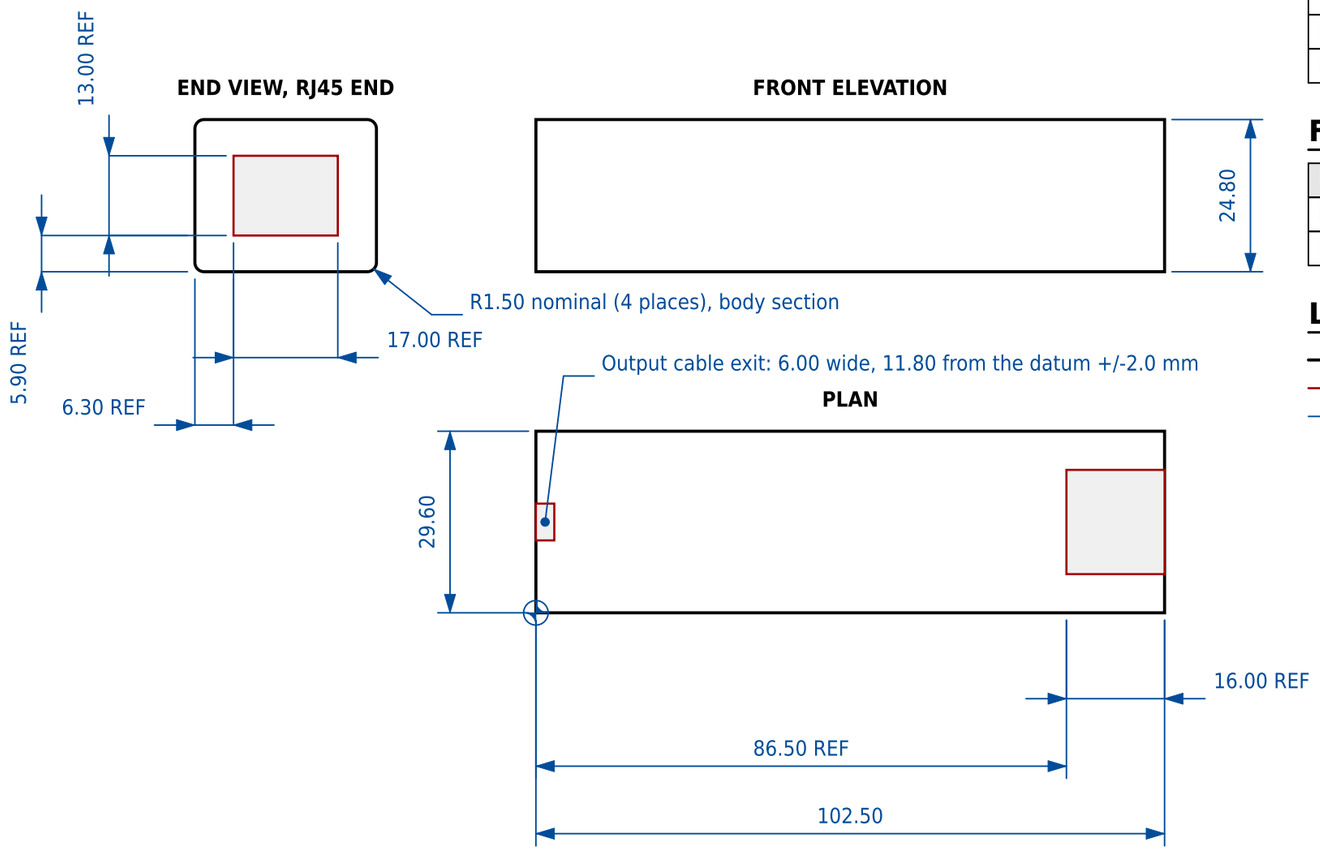



## ENVELOPE

| DIMENSION | mm |
|---|---|
| Overall length | 102.50 |
| Overall width | 29.60 |
| Overall height | 24.80 |

## FEATURES (PLAN VIEW)

| FEATURE | X EXTENT mm | Y EXTENT mm |
|---|---|---|
| RJ45 PoE input, in the end plate | 86.50 to 102.50 | 6.30 to 23.30 |
| Output cable exit | 0.00 to 3.00 | 11.80 to 17.80 |

## LEGEND

- Body envelope
- Aperture or cable exit
- Dimension, extension and leader

## NOTES

1. All dimensions in millimetres. The datum symbol on the plan marks the origin: the lower-left corner of the body envelope, X along the length, Y across the width, Z up.
2. First-angle projection. The plan is the view from above, placed below the front elevation; the end view is the view from the RJ45 end, placed to the left of it.
3. The RJ45 aperture in the end view is a standard 8P8C jack envelope, placed centrally because the vendor does not dimension it. Every dimension marked REF is scaled from vendor photographs, is good to about +/-1.5 mm, and is not for inspection. The body envelope is the dimension to trust.
4. The corner radius is nominal. It belongs to the body cross-section, so it appears in the end view only.
5. Output is 5 V at up to 5 A (25 W) on a USB-C male plug on a captive lead, not a panel-mounted receptacle. The lead leaves the end opposite the RJ45, at the cable exit dimensioned on the plan; its length is not published, so allow for the plug and its bend radius.

## NOTES (continued)

6. No panel mounting holes. Each end plate is retained by four corner screws, whose size and position the vendor does not publish, so any bracket has to clamp or strap the body.
7. Body is a finned aluminium extrusion; the fin profile is not dimensioned here and the outline is the overall envelope.

## SOURCES

1. Product page: https://www.waveshare.com/poe-splitter-25w-type-c.htm - Specification table: "DIMENSIONS 102.5 x 29.6 x 24.8mm (L x W x H)"; "POE INPUT VOLTAGE 37V ~ 57V"; "POWER OUTPUT 5V 5A (MAX)"; IEEE 802.3af/at.
2. Dimension drawing: https://www.waveshare.com/img/devkit/accBoard/POE-SPLITTER-25W-TYPE-C/POE-SPLITTER-25W-TYPE-C-details-size.jpg - Annotated 102.50 / 29.60 / 24.80, unit mm, matching the specification table.

# WAVESHARE POE SPLITTER 25 W, TYPE-C

POE-SPLITTER-25W-TYPE-C, extruded aluminium body

| DRAWN | VERSION | UNITS | SCALE |
|---|---|---|---|
| **generated** | **v0.0-80-g9ce110e** | **mm** | **1:1** |
| SIZE | SHEET | DRAWING NO | REV |
| **A3** | **1 OF 1** | **ACC-02** | **A** |
| MATERIAL | GENERAL TOLERANCE | | PROJECTION |
| **aluminium extrusion** | **envelope +/-1.0 unless noted** | | |