


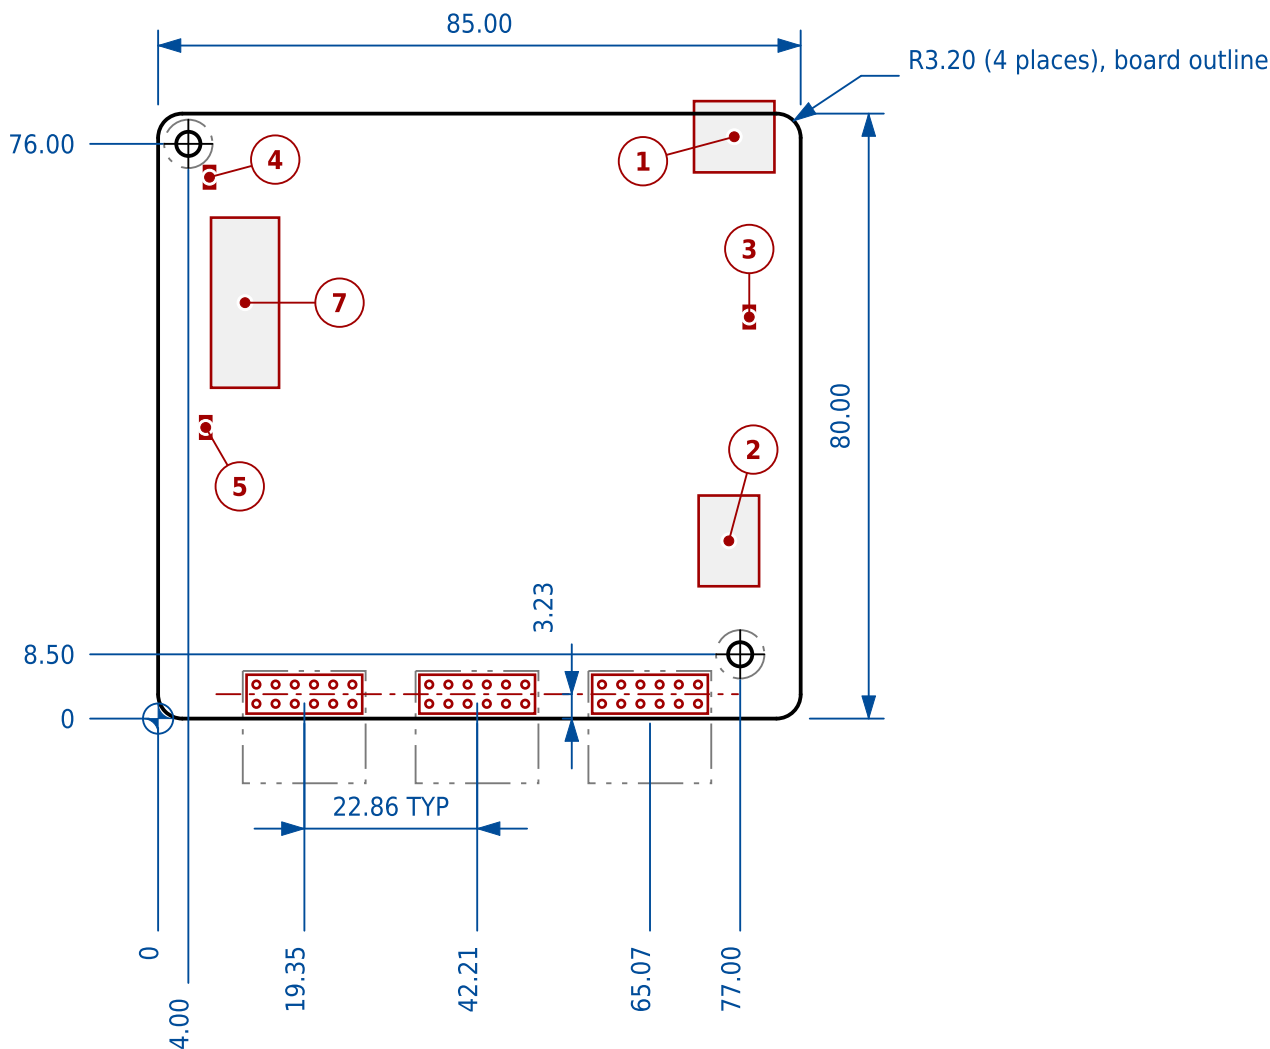

NOTES

- All dimensions in millimetres. The datum symbol marks the origin: the board's lower-left corner, X right, Y up, seen from the component side.
- Geometry is design nominal, read from the KiCad board file.
- Hole IDs are the board's own reference designators from the KiCad file, not assigned by this drawing, and are in no positional order.
- No other demo board revision shares this geometry.
- Pmod host headers are on a 22.86 mm (0.9 in) pitch, per the Digilent Pmod Interface Specification 1.2.0.
- ETR is Tiny Tapeout's own designation for this board in their board revision spreadsheet, where it is listed as "ETR (RP2350) demoboard v3.2". The KiCad title block does not carry it; it is recorded here because the board is referred to by that name. Nothing mechanical depends on it.
- The Pmod host headers along the lower edge are what a mounting plate registers against. Their 22.86 mm pitch is the same on every revision; their distance from the lower edge and their position along it are not.
- The chain-double-dot rectangle at each Pmod host is the connector body where it overhangs the edge: what a peripheral and a bracket must clear.

NOTES (continued)

- Pmod host coordinates are given to three decimals, unlike the rest of this sheet. Rounded to two, adjacent hosts print 22.85 apart and contradict the 22.86 pitch dimensioned here.
- Port names differ by family: JA, JB, JC on the adapter and Raspberry Pi sheets, by signal direction on the demo boards, PMOD 1 to 3 on the plate sheets. TT-MP-02 maps them.
- Board thickness is 1.6 mm nominal. The KiCad file's 1.56100 mm is its stackup sum, not a specified finished thickness.
- Assembled envelope, connector overhang included, is 85.00 x 81.65 mm against a 85.00 x 80.00 mm board outline. The FEATURE SCHEDULE gives the extents.
- Feature numbers are fixed across this family, so a number means the same part on every sheet. A part this board does not carry still has a row, marked as such.
- GENERAL TOLERANCE in the title block is a normal board-house figure, not one any source here states.
- Generated from the listed sources and not checked by a second party: there is no CHECKED field because nobody has signed it.

HOLE SCHEDULE

ID	X mm	Y mm	DIA mm	KEEPOUT mm
MT1	4.00	76.00	3.20	6.40
MT2	77.00	8.50	3.20	6.40

PMOD HOST HEADERS

PORT	REF	EDGE	CX mm	CY mm	PIN1 X mm	PIN1 Y mm
INPUT	J11	bottom	19.350	3.230	25.700	4.500
BIDIR	J12	bottom	42.210	3.230	48.560	4.500
OUTPUT	J13	bottom	65.070	3.230	71.420	4.500

FEATURE SCHEDULE

#	FEATURE	X EXTENT mm	Y EXTENT mm
1	USB-C power / control	70.89 to 81.53	72.23 to 81.65
2	7-segment display	71.50 to 79.50	17.50 to 29.50
3	LED D3	77.47 to 78.93	51.62 to 54.58
4	LED D4	6.07 to 7.53	70.11 to 73.07
5	LED D5	5.57 to 7.03	37.02 to 39.98
6	Fourth indicator LED - not on this board	-	-
7	8-way input DIP switch	7.00 to 16.00	43.75 to 66.25
8	Side Pmod, first position - not on this board	-	-
9	Side Pmod, second position - not on this board	-	-
10	Side Pmod, third position - not on this board	-	-

LEGEND

- Board outline
- Component body, scheduled
- Pmod connector body, hole keep-out
- Dimension, extension and leader

SOURCES

- KiCad board file: <https://github.com/TinyTapeout/tt-demo-pcb> tinytapeout-demo.kicad_pcb @ d830790ca - title block: Tiny Tapeout Demoboard v3 rev 3.2, dated 2025-11-12
- Shuttle mapping: https://docs.google.com/spreadsheets/d/1xD_uemuQcpUnXRY4twOrFzF0urJLVWMdqAnrOJLetM/edit?gid=1250963370 - row 10: "ETR (RP2350) demoboard v3.2, Hirose DF12 breakout connectors, ADC header. Production files: pcb-files/ETRV3p2/demoboard (2025-11-12)". Used by: TT09, TTSKY25a, TTSKY25b, TTGF0p2

TINY TAPEOUT DEMO BOARD V3

tinytapeout-demo rev 3.2 (ETR)

DRAWN generated	VERSION v0.0-80-g9ce110e	UNITS mm	SCALE 1:1
SIZE A3	SHEET 1 OF 1	DRAWING NO TT-DB-05	REV A
MATERIAL PCB, 1.6 nominal		GENERAL TOLERANCE edge +/-0.20 hole pos +/-0.10 hole dia +/-0.08	