


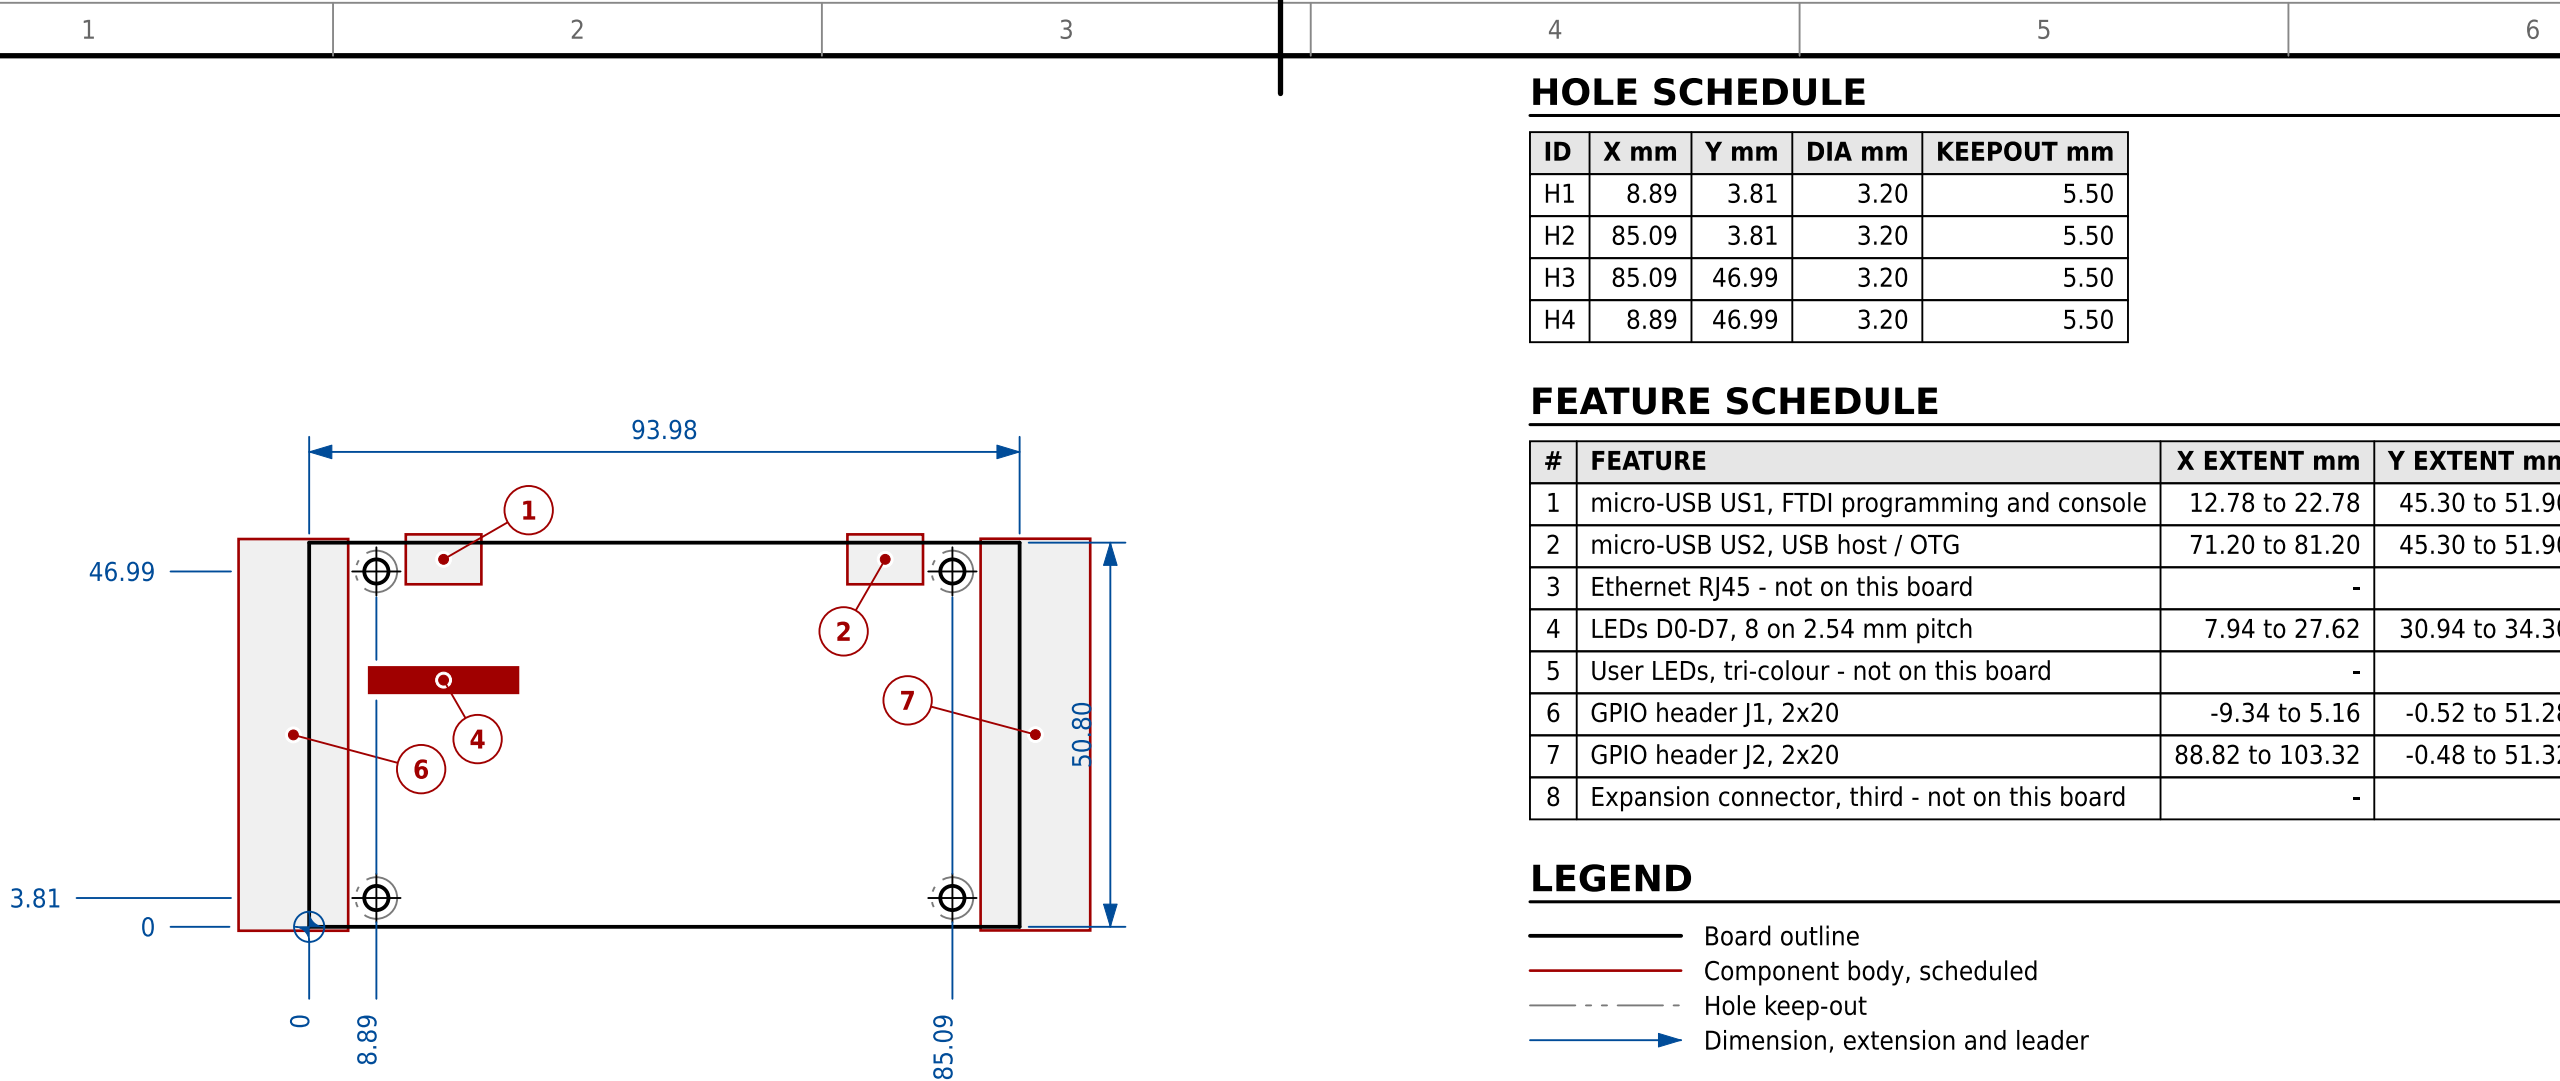

HOLE SCHEDULE

| ID | X mm  | Y mm  | DIA mm | KEEPOUT mm |
|----|-------|-------|--------|------------|
| H1 | 8.89  | 3.81  | 3.20   | 5.50       |
| H2 | 85.09 | 3.81  | 3.20   | 5.50       |
| H3 | 85.09 | 46.99 | 3.20   | 5.50       |
| H4 | 8.89  | 46.99 | 3.20   | 5.50       |

FEATURE SCHEDULE

| # | FEATURE                                        | X EXTENT mm     | Y EXTENT mm    |
|---|------------------------------------------------|-----------------|----------------|
| 1 | micro-USB US1, FTDI programming and console    | 12.78 to 22.78  | 45.30 to 51.90 |
| 2 | micro-USB US2, USB host / OTG                  | 71.20 to 81.20  | 45.30 to 51.90 |
| 3 | Ethernet RJ45 - not on this board              | -               | -              |
| 4 | LEDs D0-D7, 8 on 2.54 mm pitch                 | 7.94 to 27.62   | 30.94 to 34.30 |
| 5 | User LEDs, tri-colour - not on this board      | -               | -              |
| 6 | GPIO header J1, 2x20                           | -9.34 to 5.16   | -0.52 to 51.28 |
| 7 | GPIO header J2, 2x20                           | 88.82 to 103.32 | -0.48 to 51.32 |
| 8 | Expansion connector, third - not on this board | -               | -              |

LEGEND

- Board outline
- Component body, scheduled
- Hole keep-out
- Dimension, extension and leader

NOTES

- Viewed from the component side.
- Hole IDs are the KiCad reference designators.
- No Pmod host. J1 and J2 are right-angle 2x20 sockets on 2.54 mm whose pinout is Pmod compatible, per the maker; pin 1 of each is given in the schedule note.
- No Ethernet jack.
- Assembled envelope, connector overhang included: 112.66 x 52.42 mm.

SOURCES

- KiCad board file: [https://github.com/emard/ulx3s/ulx3s.kicad\\_pcb](https://github.com/emard/ulx3s/ulx3s.kicad_pcb) @ 300a361b (tag v3.0.3) - Radiona / emard
- KiCad board file: [https://github.com/emard/ulx3s/ulx3s.kicad\\_pcb](https://github.com/emard/ulx3s/ulx3s.kicad_pcb) @ d518b2ce (tag v3.0.7) - Radiona / emard

SOURCES (continued)

- KiCad board file: [https://github.com/emard/ulx3s/ulx3s.kicad\\_pcb](https://github.com/emard/ulx3s/ulx3s.kicad_pcb) @ 9908a1f8 (tag v3.0.8) - Radiona / emard
- KiCad board file: [https://github.com/emard/ulx3s/ulx3s.kicad\\_pcb](https://github.com/emard/ulx3s/ulx3s.kicad_pcb) @ cc1817d2 (tag v3.1.7) - Radiona / emard
- Board versions: <https://github.com/emard/ulx3s/blob/master/doc/MANUAL.md> - section "Board Versions": v3.0.3, v3.0.7, v3.0.8 and v3.1.7 are the rows marked "for sale"; the four board files are read and agree on everything drawn here.
- Board size: <https://github.com/emard/ulx3s/blob/master/README.md> - quoted: "This is a small (94x51 mm) standalone FPGA board"; the board file gives 93.98 x 50.80, which is 37 x 20 tenths of an inch.

ULX3S

v3.0.3, v3.0.7, v3.0.8 and v3.1.7

|                                     |                        |                                     |                                                                            |                    |  |                     |                 |
|-------------------------------------|------------------------|-------------------------------------|----------------------------------------------------------------------------|--------------------|--|---------------------|-----------------|
| DRAWN<br><b>generated</b>           |                        | VERSION<br><b>v0.0-151-g15ccb4c</b> |                                                                            | UNITS<br><b>mm</b> |  | SCALE<br><b>1:1</b> |                 |
| SIZE<br><b>A3</b>                   | SHEET<br><b>1 OF 1</b> |                                     | DRAWING NO<br><b>FPGA-ULX3S</b>                                            |                    |  |                     | REV<br><b>A</b> |
| MATERIAL<br><b>PCB, 1.6 nominal</b> |                        |                                     | GENERAL TOLERANCE<br><b>edge +/-0.20 hole pos +/-0.10 hole dia +/-0.08</b> |                    |  |                     |                 |