


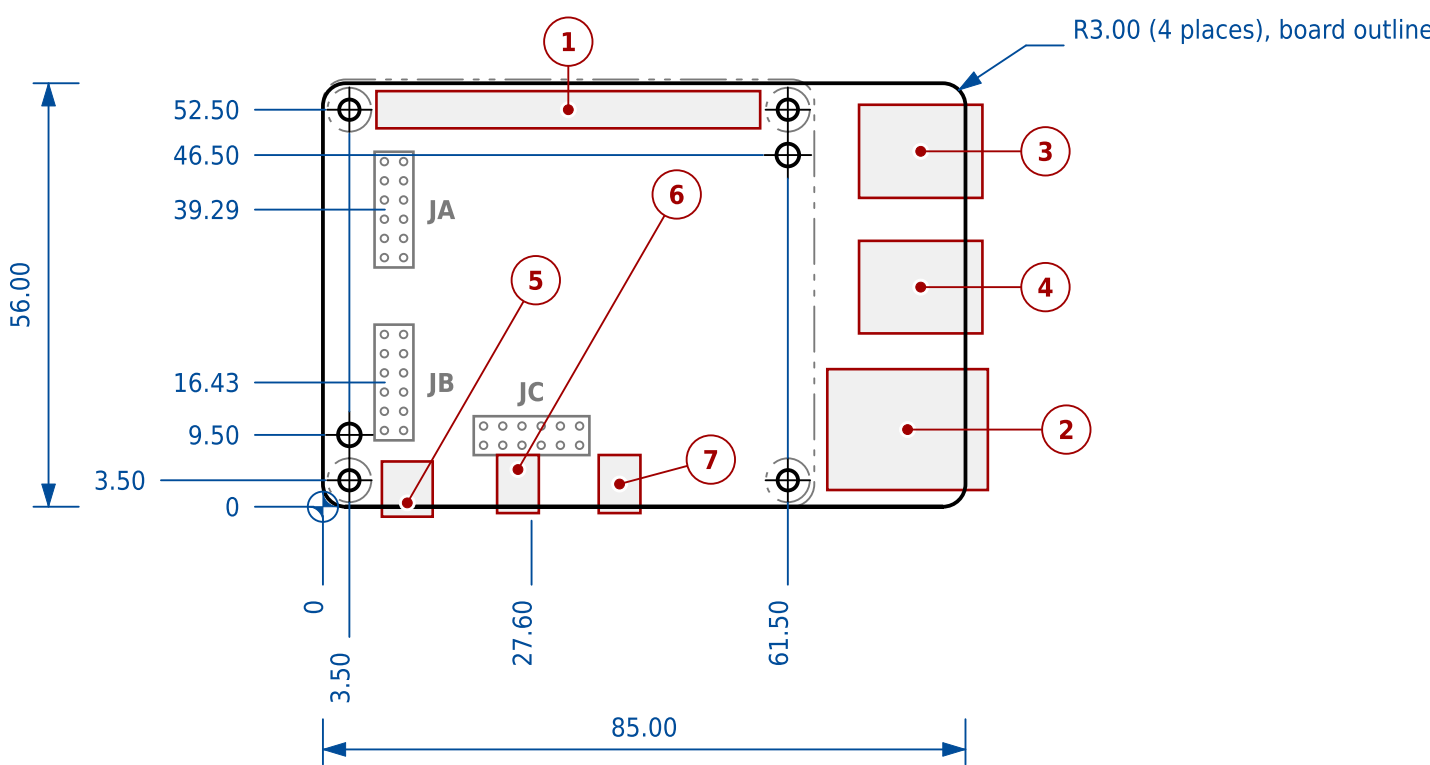

## NOTES

- All dimensions in millimetres. The datum symbol marks the origin: the lower-left corner of the board's outline, X right, Y up, viewed from the component side.
- Phantom outline is the Digilent Pmod HAT Adapter fitted to the 40-pin GPIO header, drawn in this board's frame because its mounting holes coincide with this board's.
- Connector outlines are the component body as drawn by Raspberry Pi Ltd, overhang past the board edge included.
- Hole IDs are assigned by this drawing, bottom row first then left to right, and mean the same thing on every Raspberry Pi sheet here.
- Design mounting hole keep-outs to 6.2 mm diameter on every model. That is what the Raspberry Pi HAT mechanical specification ([github.com/raspberrypi/hats](https://github.com/raspberrypi/hats)) requires around each hole, and it is the largest of the figures the individual models publish. The KEEPOUT column gives what this model's own drawing shows, which is not always anything.
- The source is a PDF, not a DXF, but a true 1:1 vector plot: its scale, recovered from the mounting hole rectangle, came out 1.00002. Geometry was read from the vector paths, so this sheet carries the same tolerance as the DXF-derived models.
- AUX1 and AUX2 are 3.0 mm holes additional to the four M2.5 mounting holes. Each sits 6.0 mm inboard of the mounting hole it shares an X coordinate with, and the pair are diagonally opposite each other.
- Hole positions are the 3.5 mm inset and 58 x 49 mm rectangle dimensioned on this model's drawing.

## NOTES (continued)

- Pmod host JC on the Pmod HAT Adapter overhangs the lower board edge in the same region as this board's HDMI and power connectors. Digilent's own reference manual warns to fit the two standoffs opposite the 40-pin connector so that JC's pins cannot touch the HDMI shell.
- Those host positions are DERIVED, not published: Digilent issue no mechanical drawing for the adapter. Good to about +/-0.75 mm. JA and JB face out of the left edge, JC out of the lower edge, all right-angle hosts whose bodies overhang the edge. The Pmod HAT Adapter sheet has the derivation.
- Pmod host coordinates are given to three decimals, unlike the rest of this sheet. Rounded to two, adjacent hosts print 22.85 apart and contradict the 22.86 pitch dimensioned here.
- Port names differ by family: JA, JB, JC after Digilent on the adapter and Raspberry Pi sheets; by signal direction on the demo boards, after the silkscreen; PMOD 1 to 3 on the plate sheets, which number plate positions. TT-MP-02 maps them.
- Assembled envelope, connector overhang included, is 87.96 x 57.32 mm against a 85.00 x 56.00 mm board outline. The FEATURE SCHEDULE gives the extents.
- GENERAL TOLERANCE in the title block is a normal board-house figure, not one any source here states.
- Generated from the listed sources and not checked by a second party: there is no CHECKED field because nobody has signed it.

## HOLE SCHEDULE

| ID   | X mm  | Y mm  | DIA mm | KEEPOUT mm |
|------|-------|-------|--------|------------|
| MT1  | 3.50  | 3.50  | 2.70   | 5.80       |
| MT2  | 61.50 | 3.50  | 2.70   | 5.80       |
| MT3  | 3.50  | 52.50 | 2.70   | 5.80       |
| MT4  | 61.50 | 52.50 | 2.70   | 5.80       |
| AUX1 | 3.50  | 9.50  | 3.00   | not given  |
| AUX2 | 61.50 | 46.50 | 3.00   | not given  |

## FEATURE SCHEDULE

| # | FEATURE                     | X EXTENT mm    | Y EXTENT mm    |
|---|-----------------------------|----------------|----------------|
| 1 | 40-pin GPIO header          | 7.08 to 57.84  | 50.04 to 54.96 |
| 2 | Ethernet RJ45               | 66.72 to 87.96 | 2.21 to 18.19  |
| 3 | USB 3.0 type A (upper pair) | 70.92 to 87.24 | 40.84 to 53.15 |
| 4 | USB 3.0 type A (lower pair) | 70.92 to 87.24 | 22.92 to 35.16 |
| 5 | USB-C power input           | 7.80 to 14.52  | -1.32 to 5.99  |
| 6 | micro-HDMI 0                | 23.04 to 28.56 | -0.84 to 6.84  |
| 7 | micro-HDMI 1                | 36.48 to 42.00 | -0.84 to 6.84  |

## PMOD HAT ADAPTER HOSTS

| PORT | EDGE        | CX mm  | CY mm  | PIN1 X mm | PIN1 Y mm |
|------|-------------|--------|--------|-----------|-----------|
| JA   | left edge   | 9.400  | 39.290 | 8.130     | 45.640    |
| JB   | left edge   | 9.400  | 16.430 | 8.130     | 22.780    |
| JC   | bottom edge | 27.600 | 9.400  | 21.250    | 8.130     |

## LEGEND

- Board outline
- Component body, scheduled
- Adjacent part, hole keep-out
- Dimension, extension and leader

## SOURCES

- Mechanical drawing: <https://datasheets.raspberrypi.com/rpi5/raspberry-pi-5-mechanical-drawing.pdf> - Raspberry Pi Ltd
- Mounting holes: <https://datasheets.raspberrypi.com/rpi5/raspberry-pi-5-mechanical-drawing.pdf> - Hole diameter dimensioned on the drawing as  $\varnothing 2.7$  mm; the keep-out circle is drawn and measures 5.80 mm.

# RASPBERRY PI 5

85 x 56 mm

|                           |            |                                                |       |
|---------------------------|------------|------------------------------------------------|-------|
| DRAWN                     | DATE       | UNITS                                          | SCALE |
| generated                 | 2026-09-10 | mm                                             | 1:1   |
| SIZE                      | SHEET      | DRAWING NO                                     | REV   |
| A3                        | 1 OF 1     | RPI-04                                         | A     |
| MATERIAL                  |            | GENERAL TOLERANCE                              |       |
| PCB, thickness not stated |            | edge +/-0.20 hole pos +/-0.10 hole dia +/-0.08 |       |