


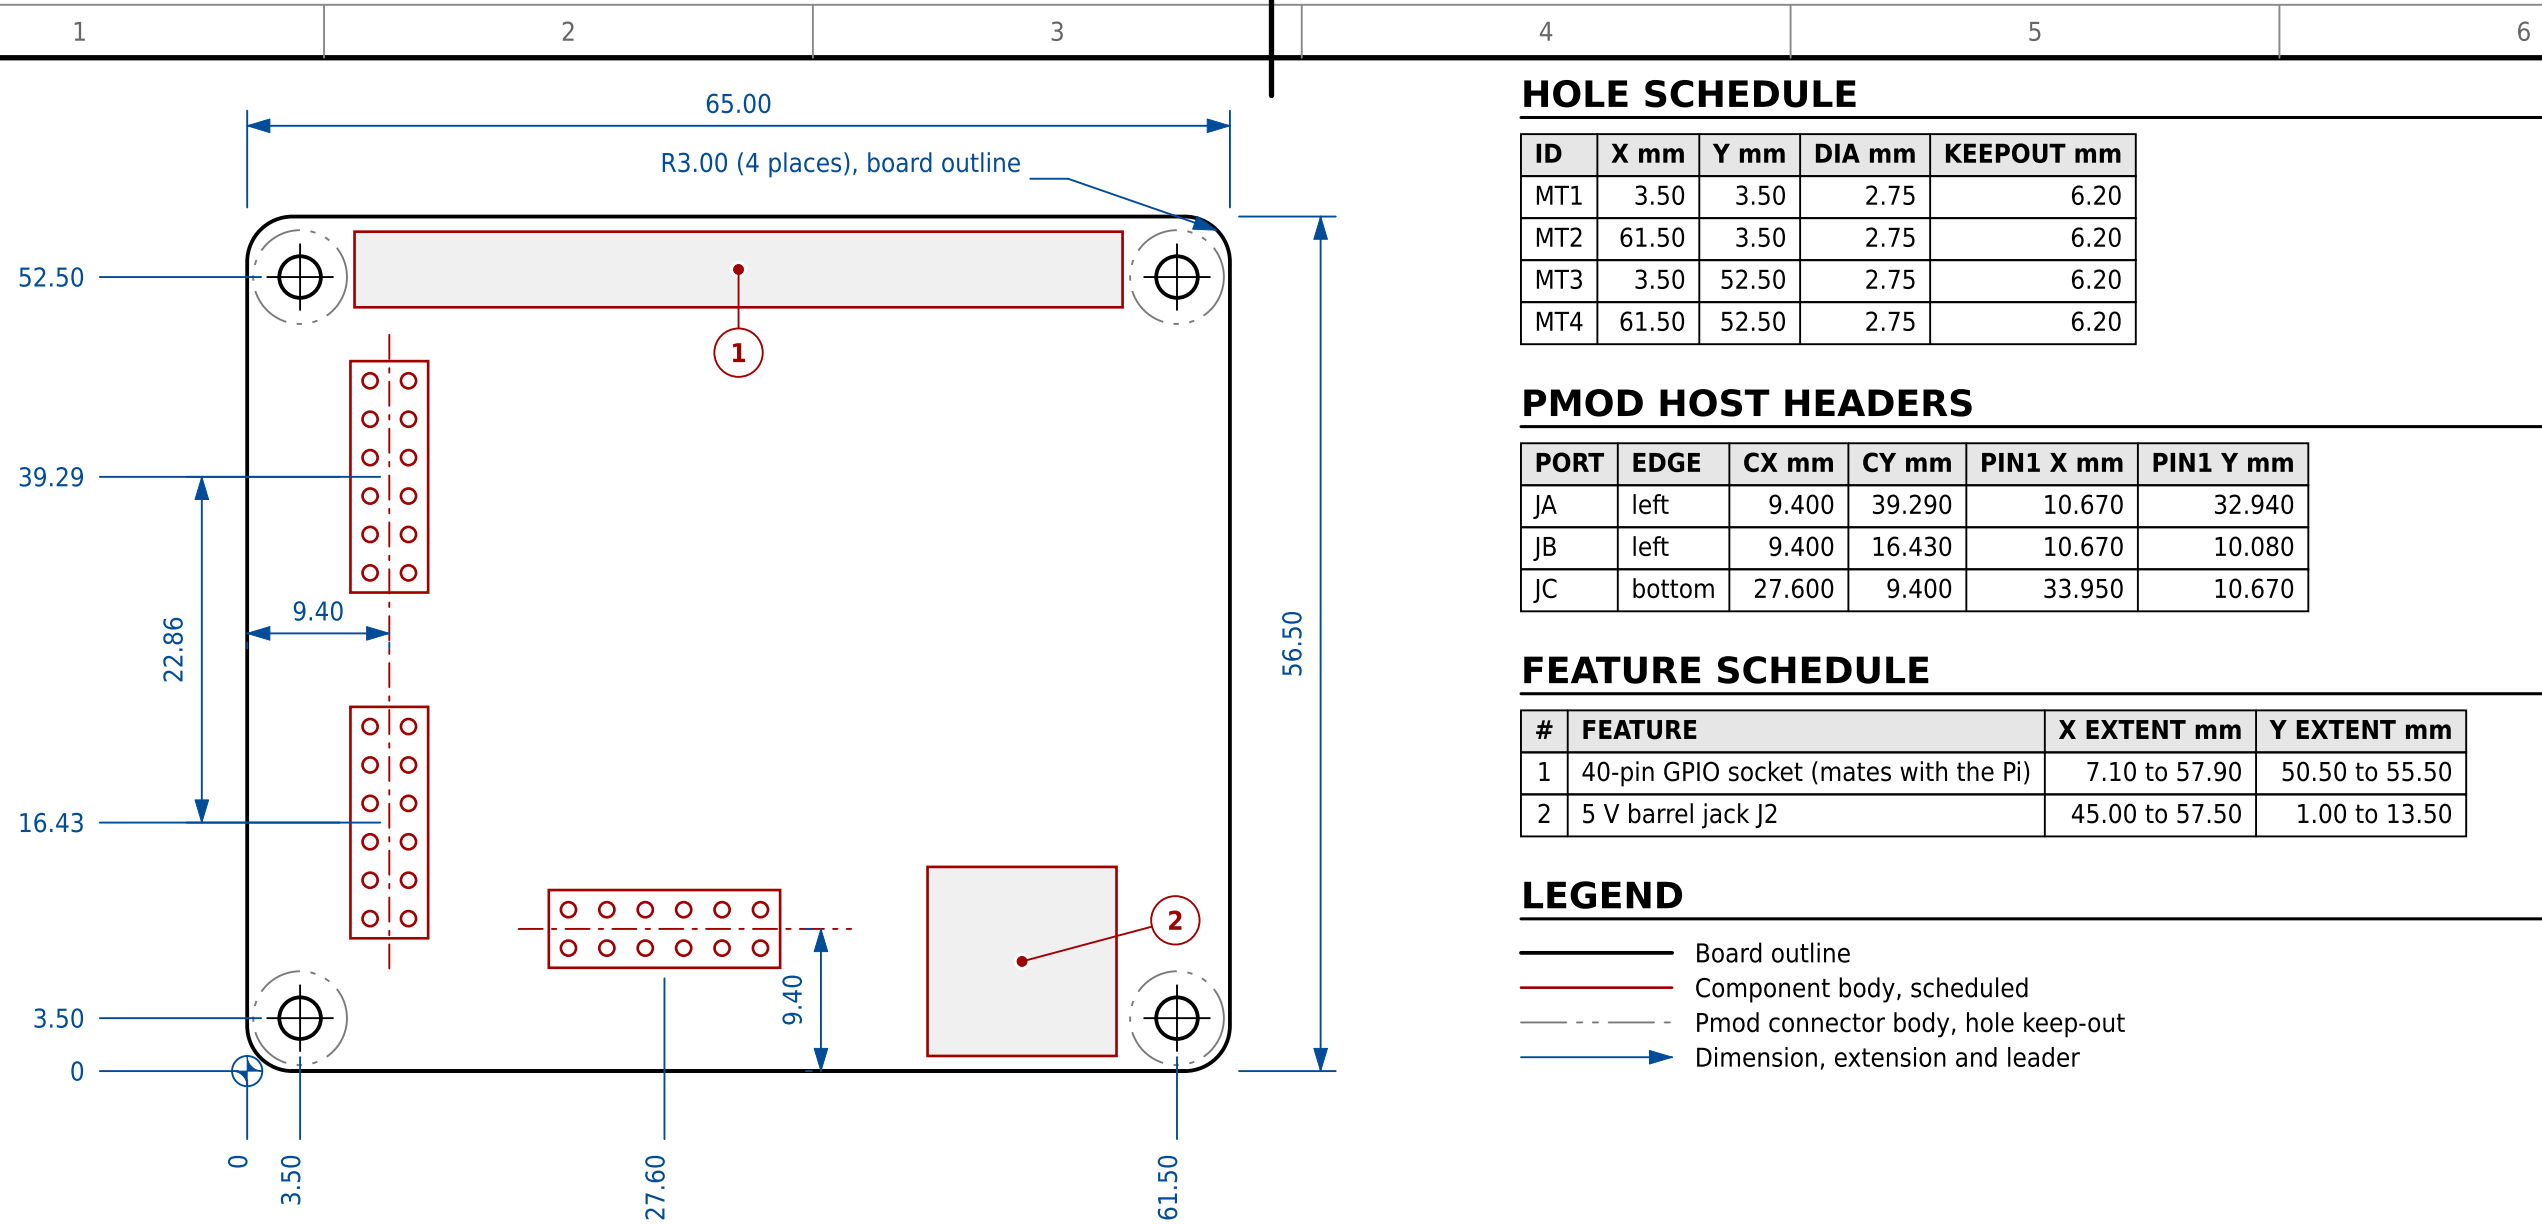

HOLE SCHEDULE

ID	X mm	Y mm	DIA mm	KEEPOUT mm
MT1	3.50	3.50	2.75	6.20
MT2	61.50	3.50	2.75	6.20
MT3	3.50	52.50	2.75	6.20
MT4	61.50	52.50	2.75	6.20

PMOD HOST HEADERS

PORT	EDGE	CX mm	CY mm	PIN1 X mm	PIN1 Y mm
JA	left	9.400	39.290	10.670	32.940
JB	left	9.400	16.430	10.670	10.080
JC	bottom	27.600	9.400	33.950	10.670

FEATURE SCHEDULE

#	FEATURE	X EXTENT mm	Y EXTENT mm
1	40-pin GPIO socket (mates with the Pi)	7.10 to 57.90	50.50 to 55.50
2	5 V barrel jack J2	45.00 to 57.50	1.00 to 13.50

LEGEND

- Board outline
- Component body, scheduled
- Pmod connector body, hole keep-out
- Dimension, extension and leader

NOTES

- Viewed from the component side.
- Outline, corner radii and mounting holes are the Raspberry Pi HAT specification's. Everything else is DERIVED from Digilent's top-view photo, as they publish no drawing: Pmod hosts good to about +/-0.75 mm, the barrel jack to +/-1.5 mm.
- All three hosts are right-angle: the connector body overhangs the board edge by roughly 3 mm and a peripheral plugs in from outside that edge.
- JA to JB is snapped to the 22.86 mm the Pmod Interface Specification mandates; it measured 23.18 mm, within the uncertainty.

SOURCES

- Raspberry Pi HAT mechanical specification: <https://github.com/raspberrypi/hats-hat-board-mechanical.pdf> - 65 x 56.0 or 65 x 56.5 mm (56.5 for an SMT 40-way header), 3 mm corner radii, four 2.75 mm holes 3.5 mm in from the edges on a 58 x 49 mm rectangle.

SOURCES (continued)

- Pmod Interface Specification 1.2.0: <https://mith.ro/pmod-spec/> - Digilent, revised 5 October 2017. Host ports on a common board edge are spaced .90 in (22.86 mm) centre to centre; pins are on a .10 in (2.54 mm) grid in both axes.
- Board outline: <https://digilent.com/reference/add-ons/pmod-hat/start> - Digilent state width 65 mm, length 56.5 mm.
- Pmod host positions: https://digilent.com/reference/_media/reference/add-ons/pmod-hat/pmod-hat-adapter-top-1000.png - Measured from Digilent's official top view by accessories/measure_pmod_hat.py. Digilent publish no dimensioned drawing for this board.
- Pmod pin 1: https://digilent.com/reference/_media/reference/add-ons/pmod-hat/171205ag_dual_brand_pmod-hat-adapter_rm.pdf - The square pad, with a 1 printed beside it, in the top view above and in the photograph in Digilent's Pmod HAT Adapter Reference Manual, Rev. B.

DIGILENT PMOD HAT ADAPTER

410-366, fitted to a Raspberry Pi 40-pin GPIO header

DRAWN		VERSION		UNITS		SCALE	
generated		v0.0-579-g0e07c5a		mm		2:1	
SIZE	SHEET		DRAWING NO				REV
A3	1 OF 1		ACC-HAT-PMOD				A
MATERIAL			GENERAL TOLERANCE				
PCB, thickness not stated			HAT spec outline; hosts DERIVED +/-0.75, see notes				