




FIRST ANGLE PROJECTION

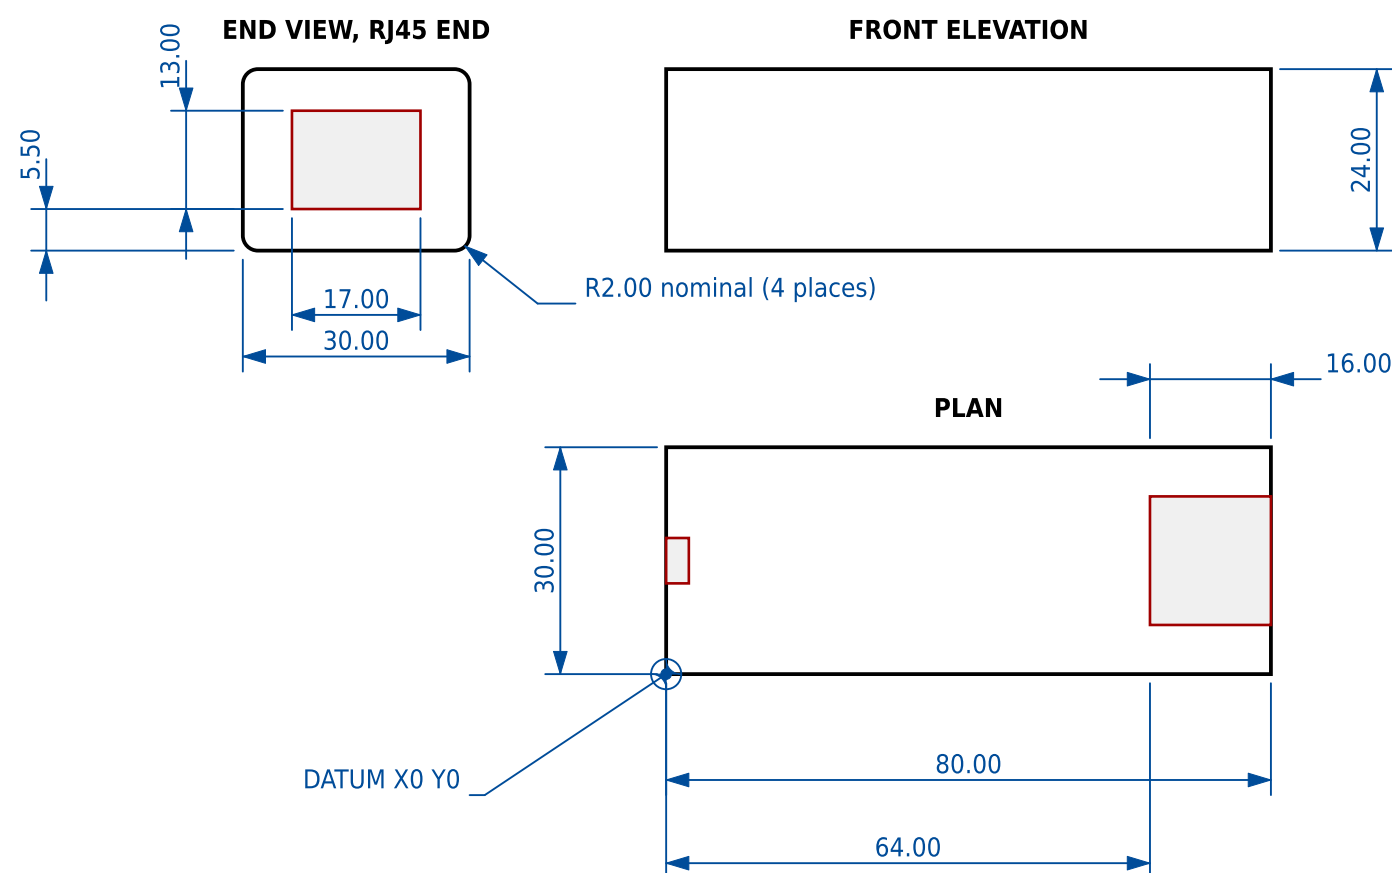

ENVELOPE

DIMENSION	mm
Overall length	80.00
Overall width	30.00
Overall height	24.00

FEATURES (PLAN VIEW)

FEATURE	X EXTENT mm	Y EXTENT mm
RJ45 PoE input, moulded into the body	64.00 to 80.00	6.50 to 23.50
Output cable exit	0.00 to 3.00	12.00 to 18.00

NOTES

1. All dimensions in millimetres. Plan datum is the lower-left corner of the body envelope, X along the length, Y across the width, Z up.
2. First-angle projection. The plan is the view from above, placed below the front elevation; the end view is the view from the RJ45 end, placed to the left of it.
3. The RJ45 aperture drawn in the end view is a standard 8P8C jack envelope, positioned centrally because the vendor does not dimension it. Its size and position are indicative to about ± 1.5 mm; the body envelope itself is the dimension to trust.
4. The corner radius is nominal. It is a cross-section feature of the extrusion, so it appears in the end view only.
5. NO SINGLE OFFICIAL SOURCE. These are near-identical clones from several factories. Two independent sources agree on an 80 mm long body: DSLRKIT quote 80 x 27 x 22 mm and Adafruit measure 80 x 30 x 24 mm.
6. The envelope drawn here is the larger of those two, 80 x 30 x 24 mm. Design any cradle to that, and allow for gigabit variants in a longer case, up to about 95 mm.
7. No mounting holes: the case is a glued plastic clamshell, so a bracket has to clamp or strap the body.

SOURCES

1. DSLRKIT active PoE splitter:
<https://www.amazon.com/DSLRSKIT-Active-Splitter-Ethernet-Raspberry/dp/B01H37XQP8> - Vendor text: "Body size: 80 x 27 x 22 mm", weight 55 g, DC cable 165 mm, RJ45 plug cable 155 mm.
2. Adafruit 3785, equivalent unit: <https://www.adafruit.com/product/3785> - "Body dimensions: 80mm x 30mm x 24mm", weight 54.1 g, each lead 205 mm.
3. AliExpress listings: AliExpress items 1005006389914897, 1005005523161215, 1005009263116567 - Most listings quote packaging rather than body size. The one plausible body figure seen was 95 x 28 x 24 mm, for a qigabit variant in a longer case.

GENERIC POE SPLITTER TO MICRO-USB

IEEE 802.3af, 5 V output, sealed plastic body

DRAWN generated	DATE 2026-09-10	UNITS mm	SCALE 1:1
SIZE A3	SHEET 1 OF 1	DRAWING NO ACC-03	REV A
MATERIAL moulded / extruded enclosure		GENERAL TOLERANCE envelope +/-1.0 unless a note says otherwise	