


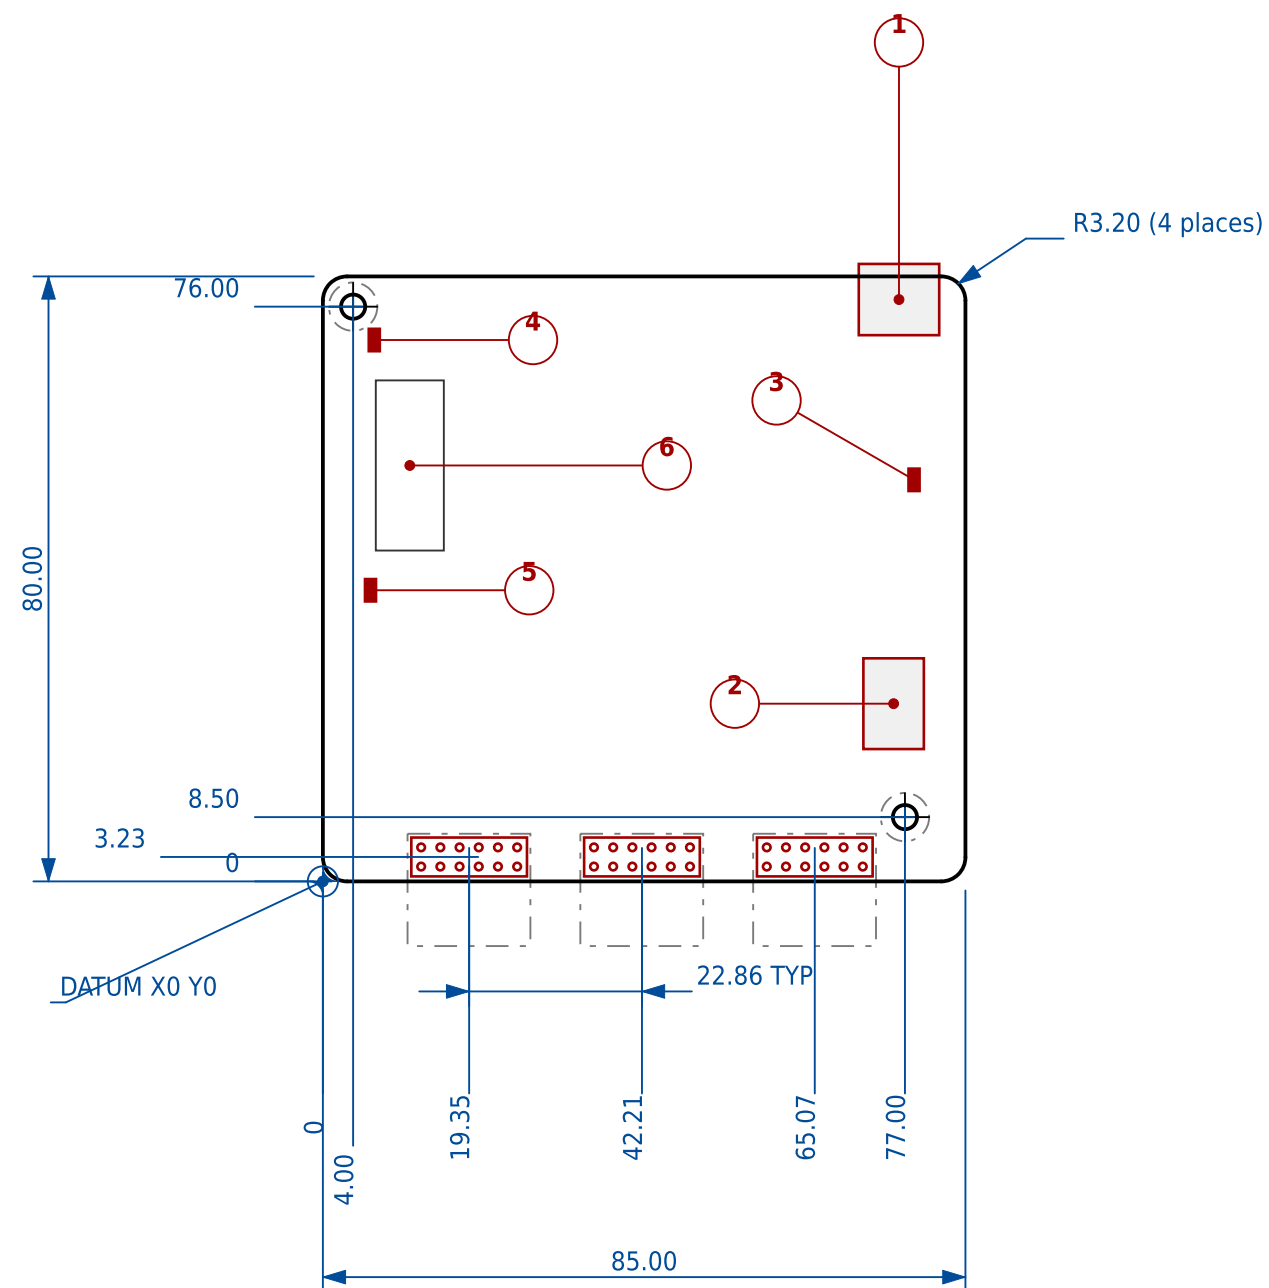

HOLE SCHEDULE

ID	X mm	Y mm	DIA mm	KEEPOUT mm
MT1	4.00	76.00	3.20	6.40
MT2	77.00	8.50	3.20	6.40

PMOD HOST HEADERS

PORT	REF	EDGE	CX mm	CY mm	PIN1 X mm	PIN1 Y mm
INPUT	J11	bottom	19.35	3.23	25.70	4.50
BIDIR	J12	bottom	42.21	3.23	48.56	4.50
OUTPUT	J13	bottom	65.07	3.23	71.42	4.50

FEATURE SCHEDULE

#	FEATURE	X EXTENT mm	Y EXTENT mm
1	USB-C power / control	70.89 to 81.53	72.23 to 81.65
2	7-segment display	71.50 to 79.50	17.50 to 29.50
3	LED D3	77.47 to 78.93	51.62 to 54.58
4	LED D4	6.07 to 7.53	70.11 to 73.07
5	LED D5	5.57 to 7.03	37.02 to 39.98
6	8-way input DIP switch	7.00 to 16.00	43.75 to 66.25

NOTES

1. All dimensions in millimetres. Datum is the lower-left corner of the board outline; X to the right, Y up, viewed from the component side.
2. Hole and Pmod positions are ordinate dimensions from that single datum, so they do not accumulate tolerance.
3. Geometry is design nominal, read from the KiCad board file.
4. No other demo board revision shares this geometry.
5. Pmod host headers are on a 22.86 mm (0.9 in) pitch, per the Digilent Pmod Interface Specification 1.2.0.
6. The Pmod host headers along the lower edge are what a mounting plate has to register against. Their 22.86 mm pitch is identical on every Tiny Tapeout demo board revision, but their distance from the lower board edge and their absolute position along it are not.

SOURCES

1. KiCad board file: <https://github.com/TinyTapeout/tt-demo-pcb> tinytapeout-demo.kicad_pcb @ d830790ca
2. Shuttle mapping: <https://github.com/TinyTapeout/tt-demo-pcb/blob/main/doc/historic/README.md>

TINY TAPEOUT DEMO BOARD V3 (ETR)

tinytapeout-demo rev 3.2

DRAWN generated	DATE 2026-09-10	UNITS mm	SCALE 1:1
SIZE A3	SHEET 1 OF 1	DRAWING NO TT-DB-07	REV A
MATERIAL PCB		GENERAL TOLERANCE +/-0.20 edge, +/-0.10 hole pos, +/-0.08 hole dia	