

A

A

B


B

C

C

D

D

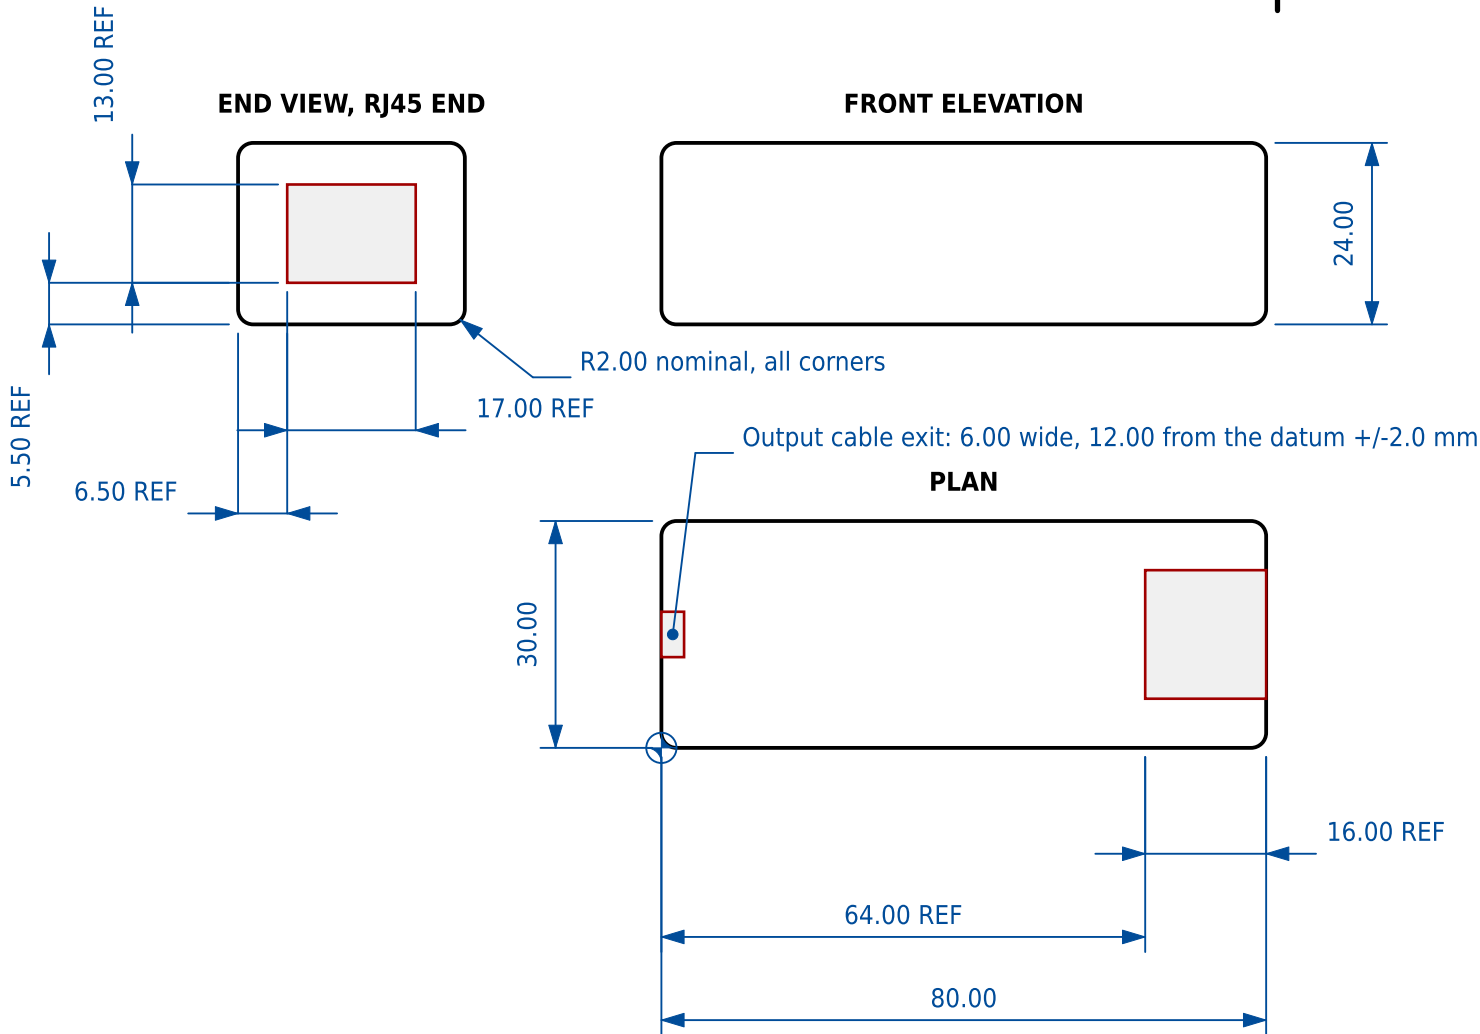

### NOTES

1. All dimensions in millimetres. The datum symbol on the plan marks the origin: the lower-left corner of the body envelope, X along the length, Y across the width, Z up.
2. First-angle projection. The plan is the view from above, placed below the front elevation; the end view is the view from the RJ45 end, placed to the left of it.
3. The RJ45 aperture in the end view is a standard 8P8C jack envelope, placed centrally because the vendor does not dimension it. Every dimension marked REF is scaled from vendor photographs, is good to about +/-2.0 mm, and is not for inspection. The body envelope is the dimension to trust.
4. The corner radius is nominal. The case is not a constant section, so the radius runs round the plan as well and is drawn there.
5. NO SINGLE OFFICIAL SOURCE. These are near-identical clones from several factories. Two independent sources agree on an 80 mm long body: DSLRKIT quote 80 x 27 x 22 mm and Adafruit measure 80 x 30 x 24 mm.
6. The envelope drawn here is the LARGER of those two, 80 x 30 x 24 mm, and the title block quotes it as a maximum rather than a nominal: a real part may be up to 3 mm narrower and 2 mm shorter in height.

### NOTES (continued)

7. Length is the one dimension that is not bounded by 80 mm, which is why the title block gives it +15/-0 while width and height are maxima: gigabit variants come in a longer case, up to about 95 mm. Design a cradle that can take that, or check the part before committing.
8. No mounting holes: the case is a glued plastic clamshell, so a bracket has to clamp or strap the body.
9. Output is 5 V on a micro-USB male plug on a captive lead, not a panel-mounted receptacle. The lead leaves the end opposite the RJ45, at the cable exit dimensioned on the plan, and is quoted at 155 to 205 mm. Allow for it: the plug and its bend radius, not the body, set how close the splitter can sit to the board it feeds.

### SOURCES

1. DSLRKIT active PoE splitter: <https://www.amazon.com/DSLRSKIT-Active-Splitter-Ethernet-Raspberry/dp/B01H37XQP8> - Vendor text: "Body size: 80 x 27 x 22 mm", weight 55 g, DC cable 165 mm, RJ45 plug cable 155 mm.
2. Adafruit 3785, equivalent unit: <https://www.adafruit.com/product/3785> - "Body dimensions: 80mm x 30mm x 24mm", weight 54.1 g, each lead 205 mm.

### ENVELOPE

| DIMENSION      | mm    |
|----------------|-------|
| Overall length | 80.00 |
| Overall width  | 30.00 |
| Overall height | 24.00 |

### FEATURES (PLAN VIEW)

| FEATURE                               | X EXTENT mm    | Y EXTENT mm    |
|---------------------------------------|----------------|----------------|
| RJ45 PoE input, moulded into the body | 64.00 to 80.00 | 6.50 to 23.50  |
| Output cable exit                     | 0.00 to 3.00   | 12.00 to 18.00 |

### LEGEND

- Body envelope
- Aperture or cable exit
- Dimension, extension and leader

### SOURCES (continued)

3. AliExpress listings: AliExpress items 1005006389914897, 1005005523161215, 1005009263116567 - Most listings quote packaging rather than body size. The one plausible body figure seen was 95 x 28 x 24 mm, for a gigabit variant in a longer case.

## GENERIC POE SPLITTER TO MICRO-USB

IEEE 802.3af, 5 V output, sealed plastic body

|                                    |                                                                         |                             |                     |
|------------------------------------|-------------------------------------------------------------------------|-----------------------------|---------------------|
| DRAWN<br><b>generated</b>          | DATE<br><b>2026-09-10</b>                                               | UNITS<br><b>mm</b>          | SCALE<br><b>1:1</b> |
| SIZE<br><b>A3</b>                  | SHEET<br><b>1 OF 1</b>                                                  | DRAWING NO<br><b>ACC-03</b> | REV<br><b>A</b>     |
| MATERIAL<br><b>moulded plastic</b> | GENERAL TOLERANCE<br><b>W +0/-3 MAX H +0/-2 MAX L +15/-0, see notes</b> |                             | PROJECTION<br>      |