




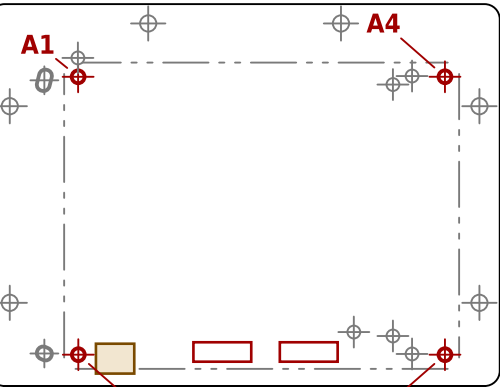


**DB mpw**  
TT02, TT03  
board rev tt123-v2.2.5, tt123-v2.2.6

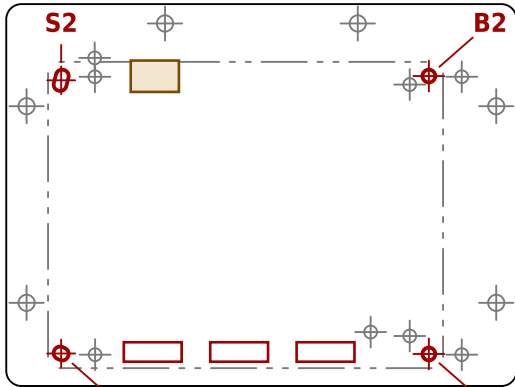


**DB 4+**  
TT04, TT05  
board rev v1.2.2, v1.2.3

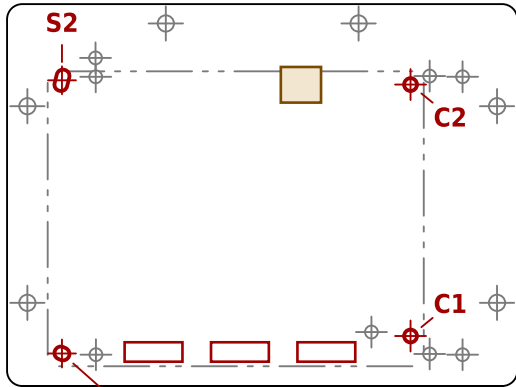

**DB 06+**  
TT06, TT07, TT08  
board rev v2.0.1, v2.1.0, v2.1.2

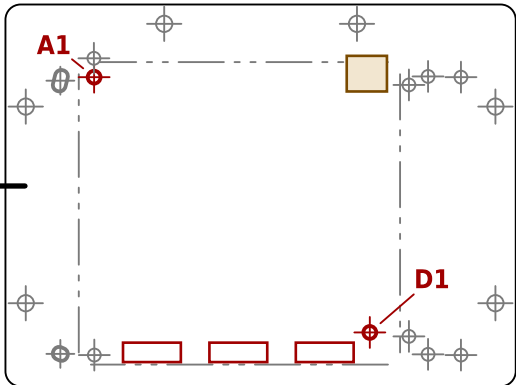

**DB ETR v3.2**  
TT09, TTSKY25a, TTSKY25b, TTGF0p2  
board rev v3.2

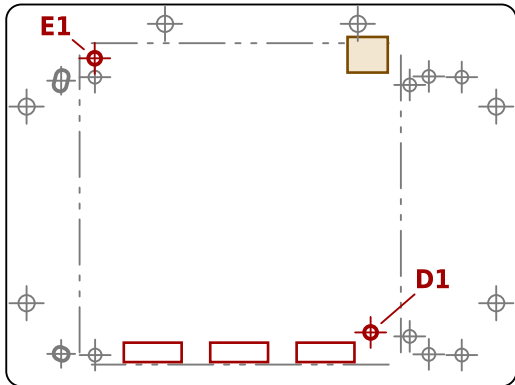

**DB ETR v3.3**  
no shipped shuttle yet  
board rev v3.3

## NOTES

- Each view shows one group of demo board revisions on the plate, with the holes and slots that group uses drawn solid and labelled, and the rest greyed back. Hole IDs match drawing TT-MP-01.
- The revisions in a group share their mounting holes and Pmod host positions exactly, which is all the plate registers against. They may differ elsewhere: v2.1.2 moved its USB-C connector 0.9 mm relative to v2.0.1 and v2.1.0, for instance.
- dX and dY place the board: add them to a coordinate in that board's own frame to get a plate coordinate.
- The DB mpw board has only two Pmod hosts. They go on plate Pmod positions 2 and 3, which makes the plate 5.15 mm narrower than putting them on 1 and 2 would.
- Every revision puts its Pmod host pin fields on the same three positions, at the same height above the plate's front edge. See drawing TT-MP-01 for the plate itself.

## BOARD PLACEMENT ON THE PLATE

| BOARD       | SHUTTLES                          | dX    | dY   | PMODS   | HOLES USED     |
|-------------|-----------------------------------|-------|------|---------|----------------|
| DB mpw      | TT02, TT03                        | 19.76 | 4.54 | 2, 3    | A1, A2, A3, A4 |
| DB 4+       | TT04, TT05                        | 11.05 | 4.72 | 1, 2, 3 | B1, B2, S1, S2 |
| DB 06+      | TT06, TT07, TT08                  | 10.74 | 5.22 | 1, 2, 3 | C1, C2, S1, S2 |
| DB ETR v3.2 | TT09, TTSKY25a, TTSKY25b, TTGF0p2 | 19.40 | 5.77 | 1, 2, 3 | A1, D1         |
| DB ETR v3.3 | not yet shipped                   | 19.40 | 5.77 | 1, 2, 3 | D1, E1         |

## USB-C CONNECTOR POSITION ON THE PLATE

| BOARD       | X EXTENT mm     | Y EXTENT mm    |
|-------------|-----------------|----------------|
| DB mpw      | 28.17 to 38.31  | 3.29 to 11.19  |
| DB 4+       | 32.94 to 45.67  | 77.78 to 86.08 |
| DB 06+      | 72.42 to 83.06  | 74.95 to 84.38 |
| DB ETR v3.2 | 90.29 to 100.93 | 78.00 to 87.42 |
| DB ETR v3.3 | 90.29 to 100.93 | 83.00 to 92.42 |

## LEGEND

- Plate edge
- Hole or slot this revision uses
- Holes it does not use, and its board outline
- USB-C connector on this revision

## TT MOUNTING PLATE FITTING GUIDE

Which holes each demo board revision uses

|                   |                                                   |            |       |
|-------------------|---------------------------------------------------|------------|-------|
| DRAWN             | VERSION                                           | UNITS      | SCALE |
| generated         | v0.0-88-g5151f5c+                                 | mm         | 1:2   |
| SIZE              | SHEET                                             | DRAWING NO | REV   |
| A3                | 2 OF 2                                            | TT-MP-02   | A     |
| MATERIAL          | GENERAL TOLERANCE                                 |            |       |
| - not a made part | reference only - TT-MP-01 governs every dimension |            |       |