


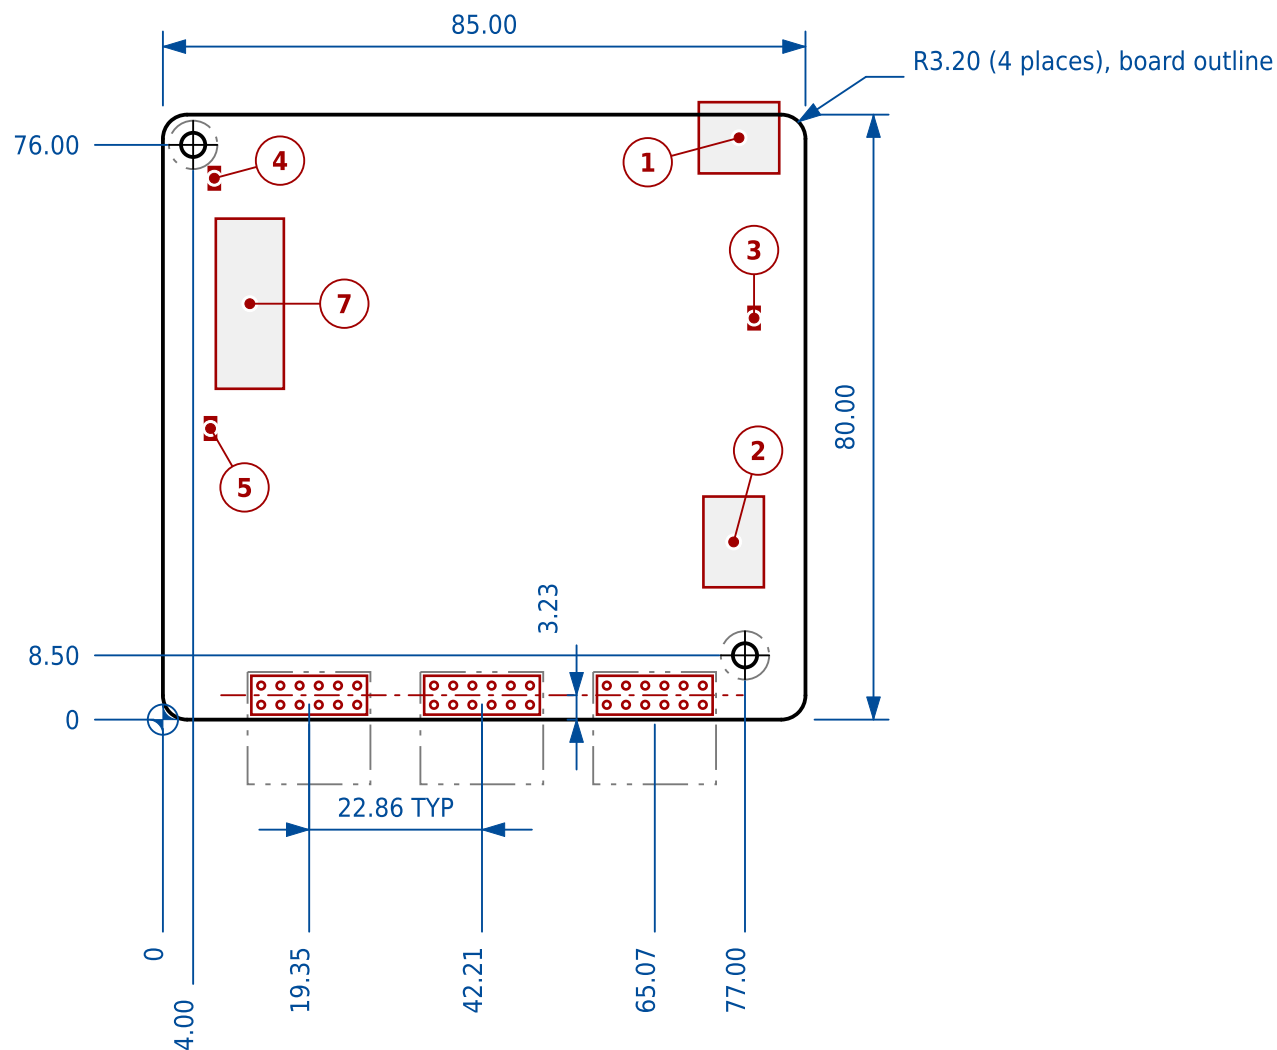

NOTES

- All dimensions in millimetres. The datum symbol marks the origin: the board's lower-left corner, X right, Y up, seen from the component side.
- Geometry is design nominal, read from the KiCad board file.
- Hole IDs are the board's own reference designators from the KiCad file, not assigned by this drawing, and are in no positional order.
- No other demo board revision shares this geometry.
- ETR is Tiny Tapeout's own designation for this board. The KiCad title block reads "Tiny Tapeout Demoboard v3" and does not carry it; the name here is the board's ID in Tiny Tapeout's board revision spreadsheet. Nothing mechanical depends on it.
- The Pmod host headers along the lower edge are what a mounting plate registers against. Their 22.86 mm (0.9 in) pitch, per the Digilent Pmod Interface Specification 1.2.0, is the same on every revision; their distance from the lower edge and their position along it are not.
- Port names differ by family: JA, JB, JC on the adapter and Raspberry Pi sheets, by signal direction on the demo boards, PMOD 1 to 3 on the plate sheets. TT-MP-02 maps them.

NOTES (continued)

- Board thickness is 1.6 mm nominal. The KiCad file's 1.56100 mm is its stackup sum, not a specified finished thickness.
- Assembled envelope, connector overhang included, is 85.00 x 81.65 mm against a 85.00 x 80.00 mm board outline. The FEATURE SCHEDULE gives the extents.
- GENERAL TOLERANCE in the title block is a normal board-house figure, not one any source here states.
- Generated from the listed sources and not checked by a second party: there is no CHECKED field because nobody has signed it.

SOURCES

- KiCad board file: <https://github.com/TinyTapeout/tt-demo-pcb> tinytapeout-demo.kicad_pcb @ d830790ca - title block: Tiny Tapeout Demoboard v3 rev 3.2, dated 2025-11-12
- Shuttle mapping: https://docs.google.com/spreadsheets/d/1xD_uemuQcpUnXRY4twOrffzF0urJLVWMDqAnrOJLetM/edit?gid=1250963370 - row "DB ETR v3.2", Used by: TT09, TTSKY25a, TTSKY25b, TTGF0p2.

HOLE SCHEDULE

ID	X mm	Y mm	DIA mm	KEEPOUT mm
MT1	4.00	76.00	3.20	6.40
MT2	77.00	8.50	3.20	6.40

PMOD HOST HEADERS

PORT	REF	EDGE	CX mm	CY mm	PIN1 X mm	PIN1 Y mm
INPUT	J11	bottom	19.350	3.230	25.700	4.500
BIDIR	J12	bottom	42.210	3.230	48.560	4.500
OUTPUT	J13	bottom	65.070	3.230	71.420	4.500

FEATURE SCHEDULE

#	FEATURE	X EXTENT mm	Y EXTENT mm
1	USB-C power / control	70.89 to 81.53	72.23 to 81.65
2	7-segment display	71.50 to 79.50	17.50 to 29.50
3	LED D3	77.47 to 78.93	51.62 to 54.58
4	LED D4	6.07 to 7.53	70.11 to 73.07
5	LED D5	5.57 to 7.03	37.02 to 39.98
6	Fourth indicator LED - not on this board	-	-
7	8-way input DIP switch	7.00 to 16.00	43.75 to 66.25
8	Second DIP switch - not on this board	-	-
9	Side Pmod, first position - not on this board	-	-
10	Side Pmod, second position - not on this board	-	-
11	Side Pmod, third position - not on this board	-	-

LEGEND

- Board outline
- Component body, scheduled
- Pmod connector body, hole keep-out
- Dimension, extension and leader

DB ETR V3.2

tinytapeout-demo rev 3.2

DRAWN	VERSION	UNITS	SCALE
generated	v0.0-88-g5151f5c+	mm	1:1
SIZE	SHEET	DRAWING NO	REV
A3	1 OF 1	TT-DB-05	A
MATERIAL		GENERAL TOLERANCE	
PCB, 1.6 nominal		edge +/-0.20 hole pos +/-0.10 hole dia +/-0.08	