

A

B

C


D

A

B

C

D

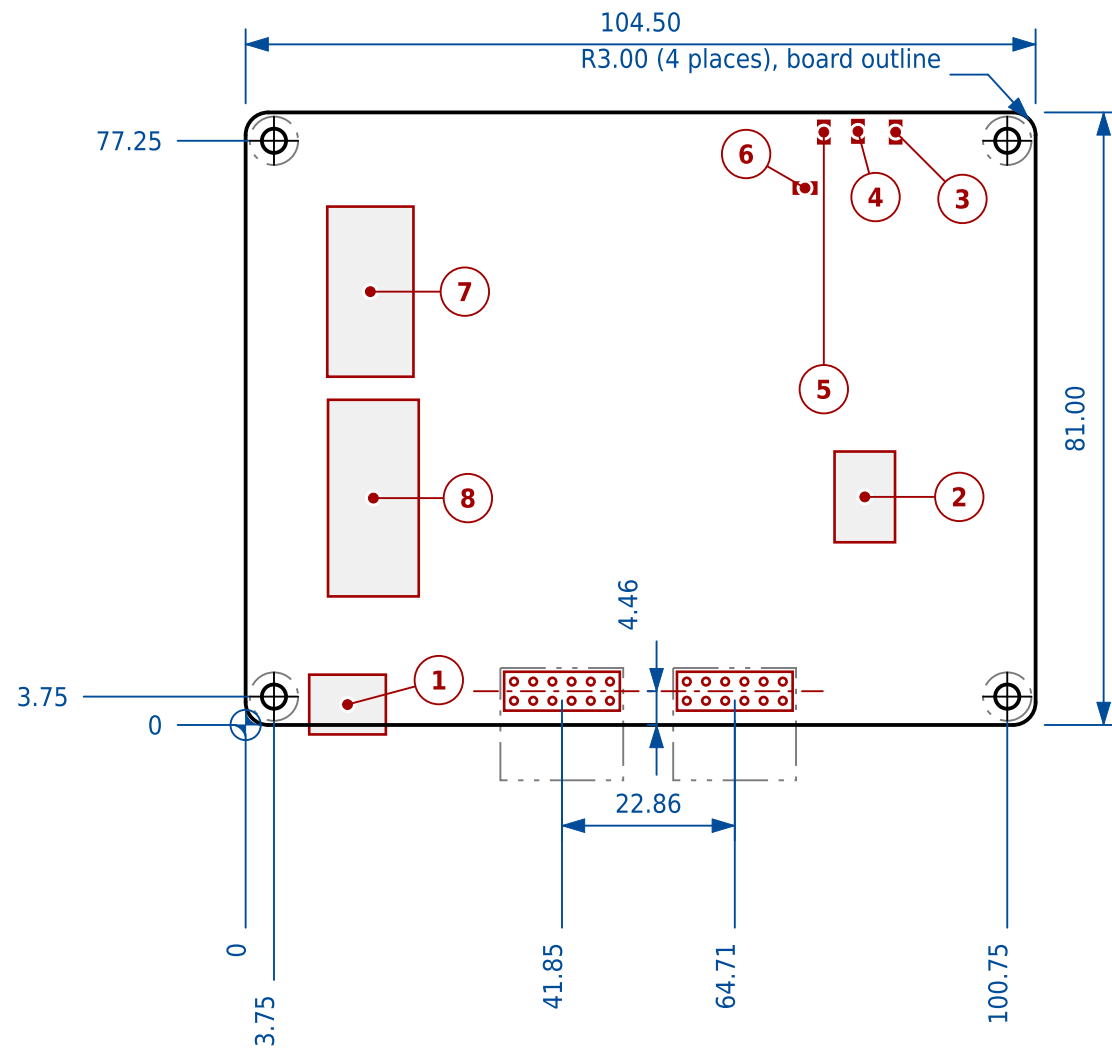

## NOTES

- All dimensions in millimetres. The datum symbol marks the origin: the board's lower-left corner, X right, Y up, seen from the component side.
- Geometry is design nominal, read from the KiCad board file.
- Hole IDs are the board's own reference designators from the KiCad file, not assigned by this drawing, and are in no positional order.
- The title block reads "TinyTapeout 1,2,3 Demo Board", but no PCB served TT01: that was a bare-die trial run.
- This sheet covers revisions 2.2.5 and 2.2.6: the same board mechanically, compared feature by feature before merging. Only the electrical design and the shuttle differ.
- The Pmod host headers along the lower edge are what a mounting plate registers against. Their 22.86 mm (0.9 in) pitch, per the Digilent Pmod Interface Specification 1.2.0, is the same on every revision; their distance from the lower edge and their position along it are not.
- Port names differ by family: JA, JB, JC on the adapter and Raspberry Pi sheets, by signal direction on the demo boards, PMOD 1 to 3 on the plate sheets. TT-MP-02 maps them.
- Board thickness is 1.6 mm nominal. The KiCad file's 1.60000 mm is its stackup sum, not a specified finished thickness.

## NOTES (continued)

- Assembled envelope, connector overhang included, is 104.50 x 82.25 mm against a 104.50 x 81.00 mm board outline. The FEATURE SCHEDULE gives the extents.
- GENERAL TOLERANCE in the title block is a normal board-house figure, not one any source here states.
- Generated from the listed sources and not checked by a second party: there is no CHECKED field because nobody has signed it.

## SOURCES

- KiCad board file: <https://github.com/TinyTapeout/tt123-demo-pcb> mpw-mb1.kicad\_pcb @ 303509a - title block: TinyTapeout 1,2,3 Demo Board rev 2.2.5, dated 2023-11-13
- KiCad board file: <https://github.com/TinyTapeout/tt123-demo-pcb> mpw-mb1.kicad\_pcb @ 3d721a6 - title block: TinyTapeout 1,2,3 Demo Board rev 2.2.6, dated 2024-02-14
- Shuttle mapping: [https://docs.google.com/spreadsheets/d/1xD\\_uemuQcpUnXRY4twOrFzF0urJLVWMDqAnrOJLetM/edit?gid=1250963370](https://docs.google.com/spreadsheets/d/1xD_uemuQcpUnXRY4twOrFzF0urJLVWMDqAnrOJLetM/edit?gid=1250963370) - used by: TT02, TT03

## HOLE SCHEDULE

| ID  | X mm   | Y mm  | DIA mm | KEEPOUT mm |
|-----|--------|-------|--------|------------|
| MT1 | 3.75   | 3.75  | 3.20   | 6.40       |
| MT2 | 100.75 | 3.75  | 3.20   | 6.40       |
| MT3 | 3.75   | 77.25 | 3.20   | 6.40       |
| MT4 | 100.75 | 77.25 | 3.20   | 6.40       |

## PMOD HOST HEADERS

| PORT   | REF | EDGE   | CX mm  | CY mm | PIN1 X mm | PIN1 Y mm |
|--------|-----|--------|--------|-------|-----------|-----------|
| PMOD A | J3  | bottom | 41.850 | 4.465 | 48.200    | 5.735     |
| PMOD B | J9  | bottom | 64.710 | 4.465 | 71.060    | 5.735     |

## FEATURE SCHEDULE

| #  | FEATURE                                        | X EXTENT mm    | Y EXTENT mm    |
|----|------------------------------------------------|----------------|----------------|
| 1  | USB-C power / control                          | 8.41 to 18.55  | -1.25 to 6.65  |
| 2  | 7-segment display                              | 77.91 to 85.91 | 24.16 to 36.16 |
| 3  | LED D1                                         | 85.25 to 86.72 | 76.92 to 79.88 |
| 4  | LED D2                                         | 80.27 to 81.73 | 77.02 to 79.98 |
| 5  | LED D3                                         | 75.75 to 77.22 | 76.92 to 79.88 |
| 6  | LED D4                                         | 72.52 to 75.48 | 70.27 to 71.73 |
| 7  | 8-way input DIP switch                         | 10.80 to 22.20 | 46.05 to 68.55 |
| 8  | 9-way DIP switch SW2                           | 10.90 to 22.90 | 17.00 to 43.00 |
| 9  | Side Pmod, first position - not on this board  | -              | -              |
| 10 | Side Pmod, second position - not on this board | -              | -              |
| 11 | Side Pmod, third position - not on this board  | -              | -              |


## LEGEND

- Board outline
- Component body, scheduled
- Pmod connector body, hole keep-out
- Dimension, extension and leader

## DB MPW V2.2.5 / DB MPW V2.2.6

mpw-mb1 rev 2.2.5 and 2.2.6

|                  |                   |                                                |       |
|------------------|-------------------|------------------------------------------------|-------|
| DRAWN            | VERSION           | UNITS                                          | SCALE |
| generated        | v0.0-88-g5151f5c+ | mm                                             | 1:1   |
| SIZE             | SHEET             | DRAWING NO                                     | REV   |
| A3               | 1 OF 1            | TT-DB-01                                       | A     |
| MATERIAL         |                   | GENERAL TOLERANCE                              |       |
| PCB, 1.6 nominal |                   | edge +/-0.20 hole pos +/-0.10 hole dia +/-0.08 |       |

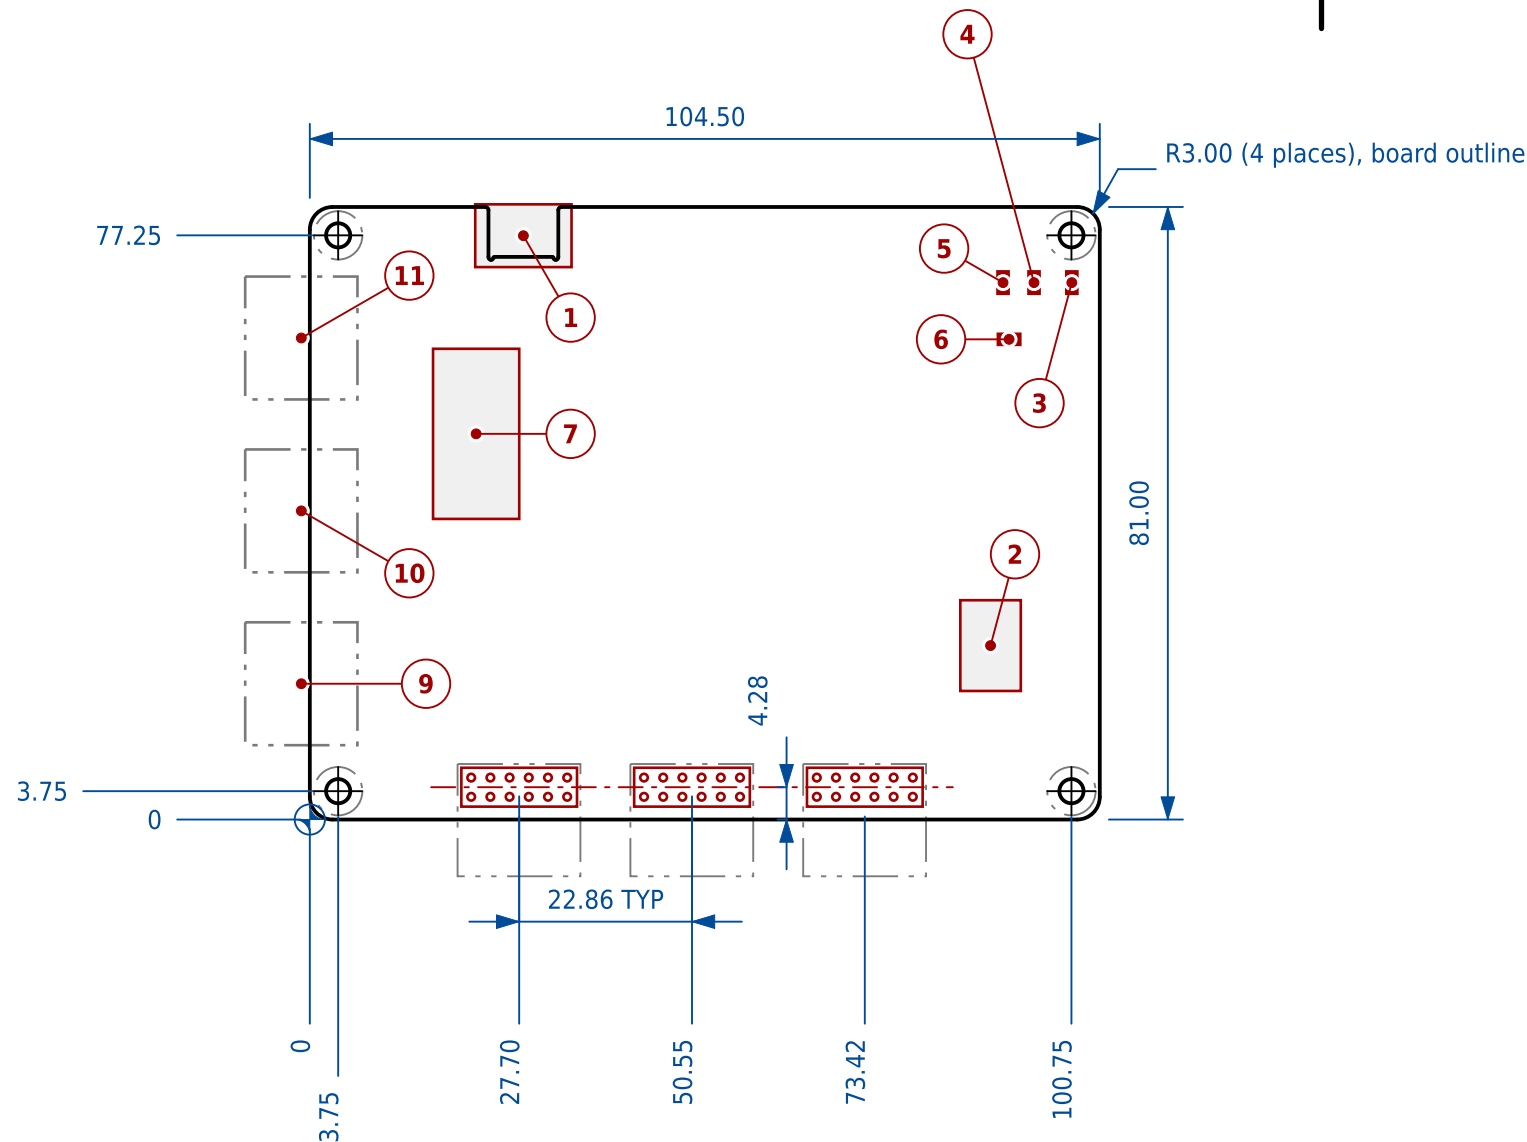

## NOTES

- All dimensions in millimetres. The datum symbol marks the origin: the board's lower-left corner, X right, Y up, seen from the component side.
- Geometry is design nominal, read from the KiCad board file.
- Hole IDs are the board's own reference designators from the KiCad file, not assigned by this drawing, and are in no positional order.
- v1.2.2c is an assembly variant, not a layout change: no X1, a 0R at R51. Its KiCad title block reads rev 1.2.3.
- This sheet covers revisions 1.2.2 and 1.2.3: the same board mechanically, compared feature by feature before merging. Only the electrical design and the shuttle differ.
- The Pmod host headers along the lower edge are what a mounting plate registers against. Their 22.86 mm (0.9 in) pitch, per the Digilent Pmod Interface Specification 1.2.0, is the same on every revision; their distance from the lower edge and their position along it are not.
- Port names differ by family: JA, JB, JC on the adapter and Raspberry Pi sheets, by signal direction on the demo boards, PMOD 1 to 3 on the plate sheets. TT-MP-02 maps them.
- Board thickness is 1.6 mm nominal. The KiCad file's 1.56252 mm is its stackup sum, not a specified finished thickness.

## NOTES (continued)

- Assembled envelope, connector overhang included, is 104.50 x 81.35 mm against a 104.50 x 81.00 mm board outline. The FEATURE SCHEDULE gives the extents.
- Upper edge carries a shallow recess for the USB-C shell, contributed by the connector footprint's own edge cuts.
- GENERAL TOLERANCE in the title block is a normal board-house figure, not one any source here states.
- Generated from the listed sources and not checked by a second party: there is no CHECKED field because nobody has signed it.

## SOURCES

- KiCad board file: [https://github.com/TinyTapeout/tt-demo-pcb/tinytapeout-demo.kicad\\_pcb](https://github.com/TinyTapeout/tt-demo-pcb/tinytapeout-demo.kicad_pcb) @ cfdd80d7b - title block: TinyTapeout 4+ Demoboard rev 1.2.2, dated 2024-04-26
- KiCad board file: [https://github.com/TinyTapeout/tt-demo-pcb/tinytapeout-demo.kicad\\_pcb](https://github.com/TinyTapeout/tt-demo-pcb/tinytapeout-demo.kicad_pcb) @ a88cbc08b - title block: TinyTapeout 4+ Demoboard rev 1.2.3, dated 2024-06-11
- Shuttle mapping: [https://docs.google.com/spreadsheets/d/1xD\\_uemuQcpUnXRY4twOrFzF0urJLVWMDqAnrOJLetM/edit?gid=1250963370](https://docs.google.com/spreadsheets/d/1xD_uemuQcpUnXRY4twOrFzF0urJLVWMDqAnrOJLetM/edit?gid=1250963370) - used by: TT04, TT05

## HOLE SCHEDULE

| ID  | X mm   | Y mm  | DIA mm | KEEPOUT mm |
|-----|--------|-------|--------|------------|
| MT1 | 3.75   | 3.75  | 3.20   | 6.40       |
| MT2 | 100.75 | 3.75  | 3.20   | 6.40       |
| MT3 | 3.75   | 77.25 | 3.20   | 6.40       |
| MT4 | 100.75 | 77.25 | 3.20   | 6.40       |

## PMOD HOST HEADERS

| PORT   | REF | EDGE   | CX mm  | CY mm | PIN1 X mm | PIN1 Y mm |
|--------|-----|--------|--------|-------|-----------|-----------|
| INPUT  | J3  | bottom | 27.695 | 4.275 | 34.045    | 5.545     |
| BIDIR  | J5  | bottom | 50.555 | 4.275 | 56.905    | 5.545     |
| OUTPUT | J6  | bottom | 73.415 | 4.275 | 79.765    | 5.545     |

## FEATURE SCHEDULE

| #  | FEATURE                               | X EXTENT mm      | Y EXTENT mm    |
|----|---------------------------------------|------------------|----------------|
| 1  | USB-C power / control                 | 21.88 to 34.62   | 73.05 to 81.35 |
| 2  | 7-segment display                     | 86.05 to 94.05   | 17.00 to 29.00 |
| 3  | LED D1                                | 100.07 to 101.53 | 69.52 to 72.48 |
| 4  | LED D2                                | 95.07 to 96.53   | 69.52 to 72.48 |
| 5  | LED D3                                | 90.97 to 92.43   | 69.52 to 72.48 |
| 6  | LED D4                                | 91.02 to 93.98   | 62.77 to 64.23 |
| 7  | 8-way input DIP switch                | 16.30 to 27.70   | 39.75 to 62.25 |
| 8  | Second DIP switch - not on this board | -                | -              |
| 9  | Side Pmod J12 (not fitted)            | -8.55 to 6.30    | 9.83 to 26.08  |
| 10 | Side Pmod J13 (not fitted)            | -8.55 to 6.30    | 32.69 to 48.94 |
| 11 | Side Pmod J14 (not fitted)            | -8.55 to 6.30    | 55.55 to 71.80 |


## LEGEND

- Board outline
- Component body, scheduled
- Position not fitted on this revision
- Pmod connector body, hole keep-out
- Dimension, extension and leader

## DB 4+ V1.2.2 / DB 4+ V1.2.2C

tinytapeout-demo rev 1.2.2 and 1.2.3

|                  |                   |                                                |       |
|------------------|-------------------|------------------------------------------------|-------|
| DRAWN            | VERSION           | UNITS                                          | SCALE |
| generated        | v0.0-88-g5151f5c+ | mm                                             | 1:1   |
| SIZE             | SHEET             | DRAWING NO                                     | REV   |
| A3               | 1 OF 1            | TT-DB-02                                       | A     |
| MATERIAL         |                   | GENERAL TOLERANCE                              |       |
| PCB, 1.6 nominal |                   | edge +/-0.20 hole pos +/-0.10 hole dia +/-0.08 |       |

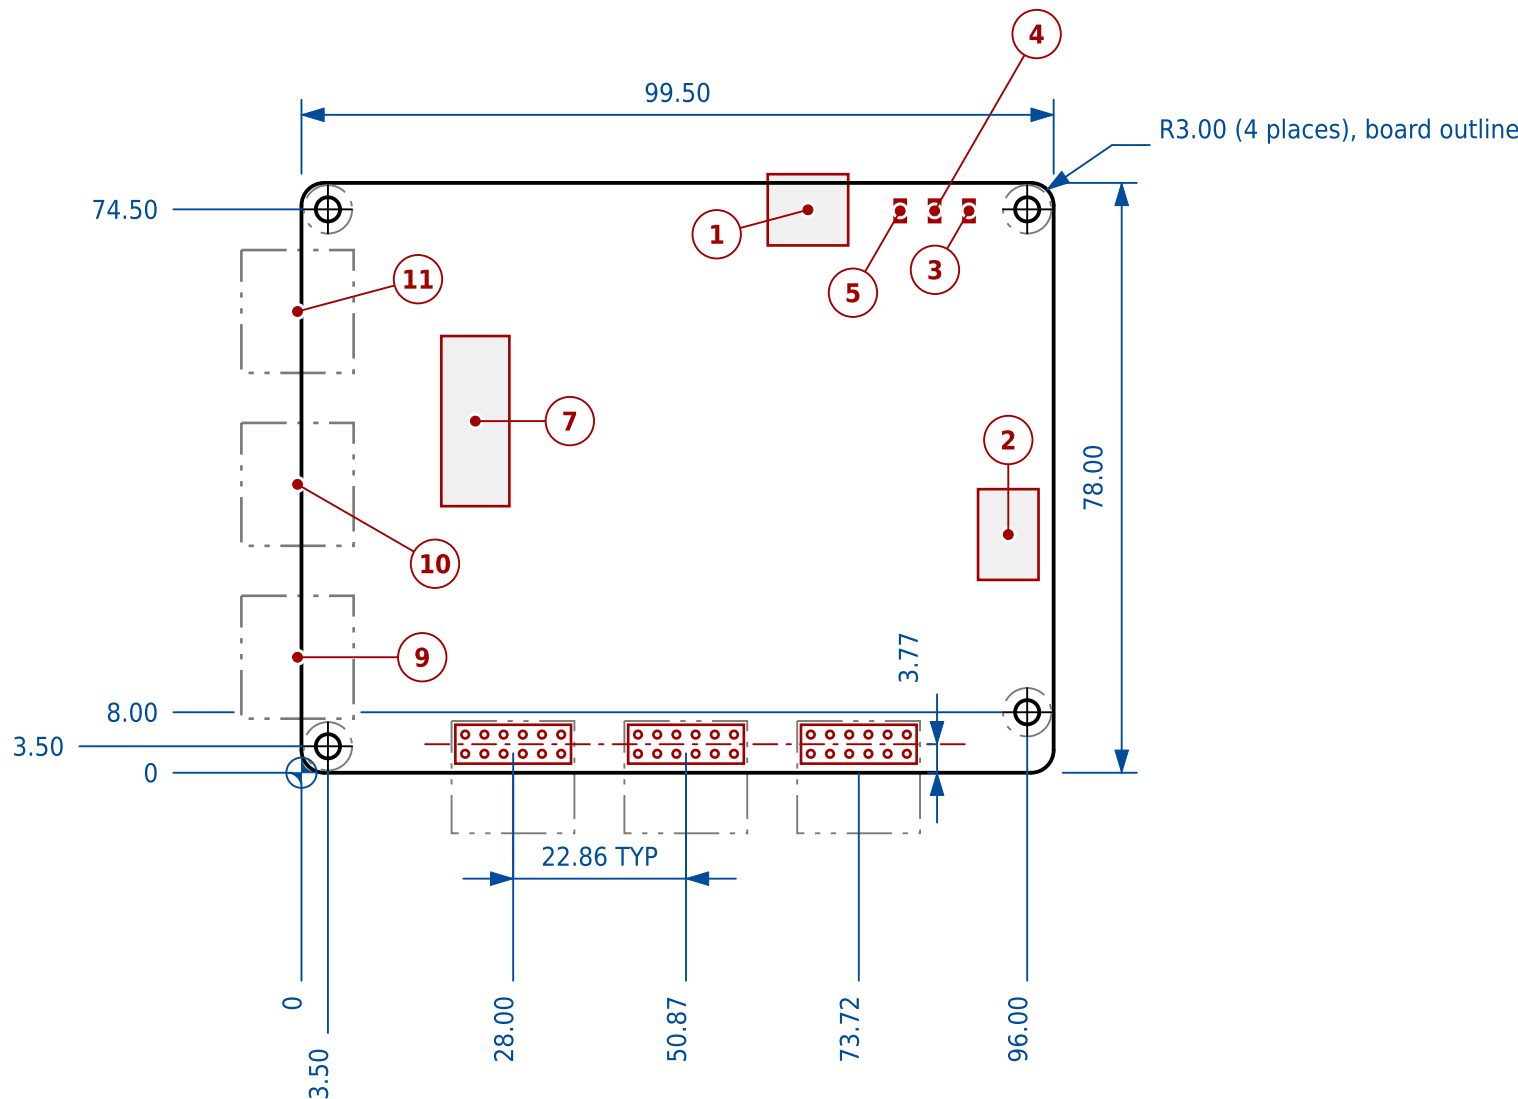

### NOTES

- All dimensions in millimetres. The datum symbol marks the origin: the board's lower-left corner, X right, Y up, seen from the component side.
- Geometry is design nominal, read from the KiCad board file.
- Hole IDs are the board's own reference designators from the KiCad file, not assigned by this drawing, and are in no positional order.
- This sheet covers revisions 2.0.1 and 2.1.0: the same board mechanically, compared feature by feature before merging. Only the electrical design and the shuttle differ.
- The Pmod host headers along the lower edge are what a mounting plate registers against. Their 22.86 mm (0.9 in) pitch, per the Digilent Pmod Interface Specification 1.2.0, is the same on every revision; their distance from the lower edge and their position along it are not.
- Port names differ by family: JA, JB, JC on the adapter and Raspberry Pi sheets, by signal direction on the demo boards, PMOD 1 to 3 on the plate sheets. TT-MP-02 maps them.
- Board thickness is 1.6 mm nominal. The KiCad file's 1.56252 mm is its stackup sum, not a specified finished thickness.

### NOTES (continued)

- Assembled envelope, connector overhang included, is 99.50 x 79.15 mm against a 99.50 x 78.00 mm board outline. The FEATURE SCHEDULE gives the extents.
- GENERAL TOLERANCE in the title block is a normal board-house figure, not one any source here states.
- Generated from the listed sources and not checked by a second party: there is no CHECKED field because nobody has signed it.

### SOURCES

- KiCad board file: <https://github.com/TinyTapeout/tt-demo-pcb> tinytapeout-demo.kicad\_pcb @ 292760e1f - title block: TinyTapeout 06+ Demoboard rev 2.0.1, dated 2024-09-05
- KiCad board file: <https://github.com/TinyTapeout/tt-demo-pcb> tinytapeout-demo.kicad\_pcb @ a799acb38 - title block: TinyTapeout 06+ Demoboard rev 2.1.0, dated 2024-12-10
- Shuttle mapping: [https://docs.google.com/spreadsheets/d/1xD\\_uemuQcpUnXRY4twOrFzF0urJLVWMdqAnrOJLetM/edit?gid=1250963370](https://docs.google.com/spreadsheets/d/1xD_uemuQcpUnXRY4twOrFzF0urJLVWMdqAnrOJLetM/edit?gid=1250963370) - used by: TT06, TT07

### HOLE SCHEDULE

| ID  | X mm  | Y mm  | DIA mm | KEEPOUT mm |
|-----|-------|-------|--------|------------|
| MT1 | 3.50  | 3.50  | 3.20   | 6.40       |
| MT2 | 96.00 | 8.00  | 3.20   | 6.40       |
| MT3 | 3.50  | 74.50 | 3.20   | 6.40       |
| MT4 | 96.00 | 74.50 | 3.20   | 6.40       |

### PMOD HOST HEADERS

| PORT   | REF | EDGE   | CX mm  | CY mm | PIN1 X mm | PIN1 Y mm |
|--------|-----|--------|--------|-------|-----------|-----------|
| INPUT  | J3  | bottom | 28.005 | 3.775 | 34.355    | 5.045     |
| BIDIR  | J5  | bottom | 50.865 | 3.775 | 57.215    | 5.045     |
| OUTPUT | J6  | bottom | 73.725 | 3.775 | 80.075    | 5.045     |

### FEATURE SCHEDULE

| #  | FEATURE                                  | X EXTENT mm    | Y EXTENT mm    |
|----|------------------------------------------|----------------|----------------|
| 1  | USB-C power / control                    | 61.68 to 72.32 | 69.73 to 79.15 |
| 2  | 7-segment display                        | 89.50 to 97.50 | 25.50 to 37.50 |
| 3  | LED D1                                   | 87.57 to 89.03 | 72.82 to 75.78 |
| 4  | LED D2                                   | 83.02 to 84.48 | 72.82 to 75.78 |
| 5  | LED D3                                   | 78.47 to 79.93 | 72.82 to 75.78 |
| 6  | Fourth indicator LED - not on this board | -              | -              |
| 7  | 8-way input DIP switch                   | 18.50 to 27.50 | 35.25 to 57.75 |
| 8  | Second DIP switch - not on this board    | -              | -              |
| 9  | Side Pmod J12 (not fitted)               | -7.95 to 6.90  | 7.15 to 23.40  |
| 10 | Side Pmod J13 (not fitted)               | -7.95 to 6.90  | 30.01 to 46.26 |
| 11 | Side Pmod J14 (not fitted)               | -7.95 to 6.90  | 52.87 to 69.12 |


### LEGEND

- Board outline
- Component body, scheduled
- Position not fitted on this revision
- Pmod connector body, hole keep-out
- Dimension, extension and leader

## DB 06+ V2.0.1 / DB 06+ V2.1.0

tinytapeout-demo rev 2.0.1 and 2.1.0

|                  |                   |                                                |       |
|------------------|-------------------|------------------------------------------------|-------|
| DRAWN            | VERSION           | UNITS                                          | SCALE |
| generated        | v0.0-88-g5151f5c+ | mm                                             | 1:1   |
| SIZE             | SHEET             | DRAWING NO                                     | REV   |
| A3               | 1 OF 1            | TT-DB-03                                       | A     |
| MATERIAL         |                   | GENERAL TOLERANCE                              |       |
| PCB, 1.6 nominal |                   | edge +/-0.20 hole pos +/-0.10 hole dia +/-0.08 |       |

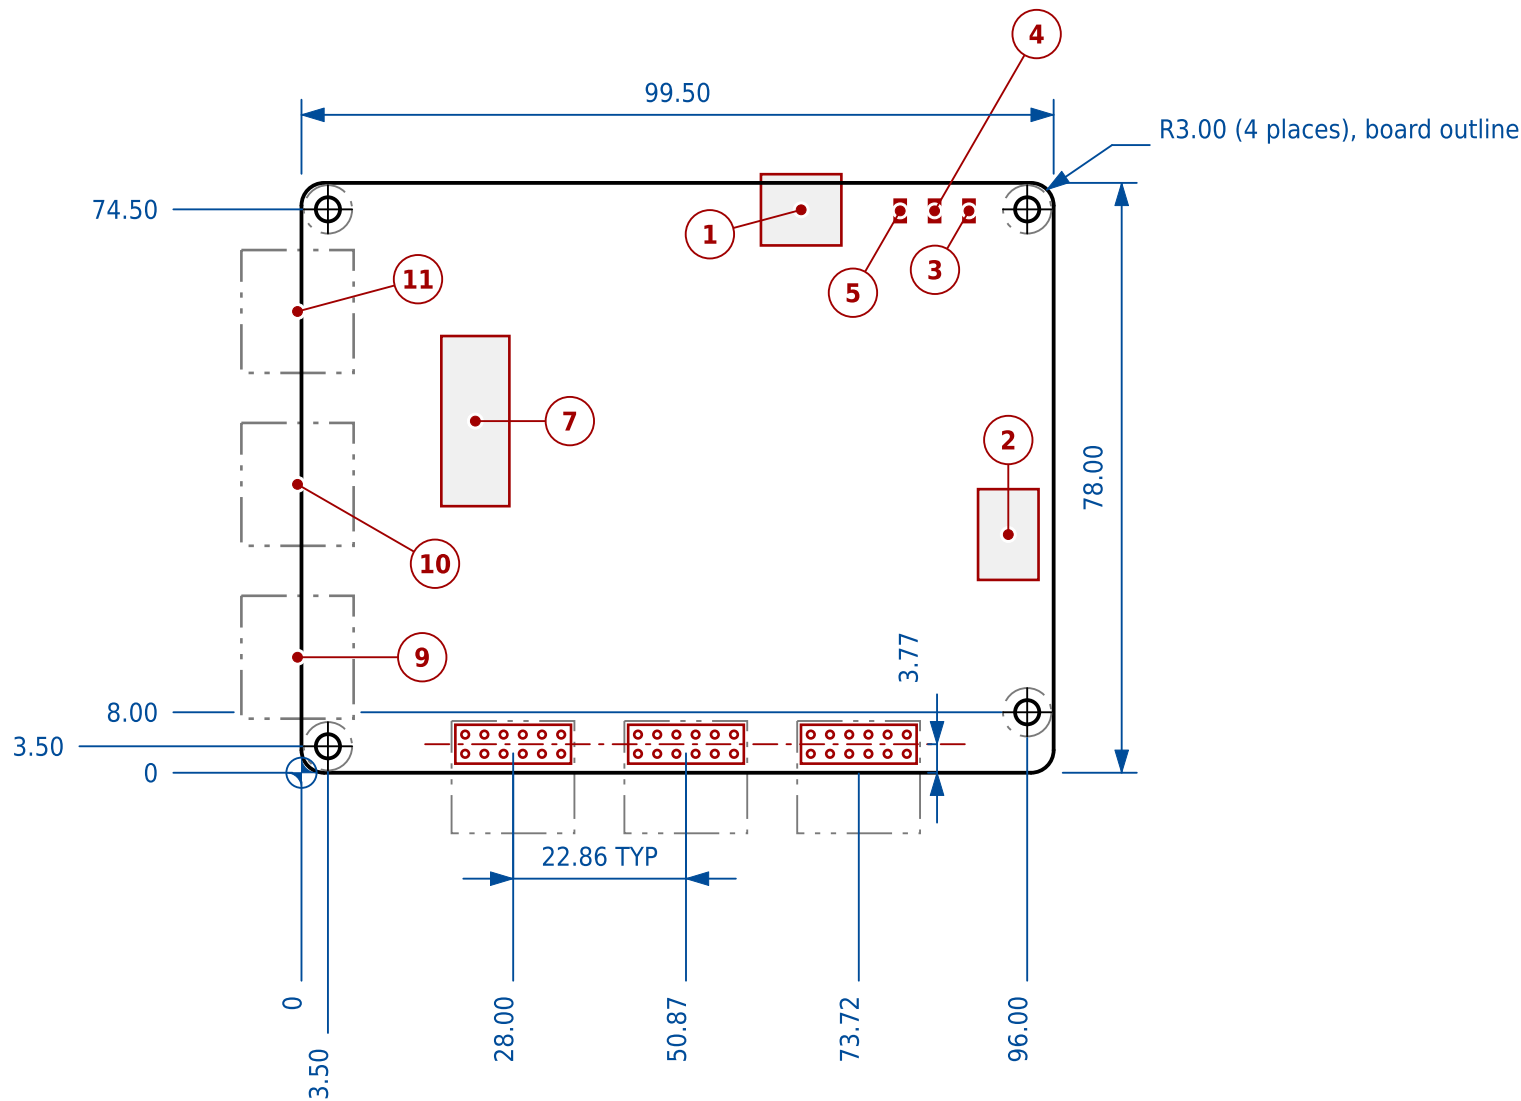

## NOTES

- All dimensions in millimetres. The datum symbol marks the origin: the board's lower-left corner, X right, Y up, seen from the component side.
- Geometry is design nominal, read from the KiCad board file.
- Hole IDs are the board's own reference designators from the KiCad file, not assigned by this drawing, and are in no positional order.
- No other demo board revision shares this geometry.
- The Pmod host headers along the lower edge are what a mounting plate registers against. Their 22.86 mm (0.9 in) pitch, per the Digilent Pmod Interface Specification 1.2.0, is the same on every revision; their distance from the lower edge and their position along it are not.
- Port names differ by family: JA, JB, JC on the adapter and Raspberry Pi sheets, by signal direction on the demo boards, PMOD 1 to 3 on the plate sheets. TT-MP-02 maps them.
- Board thickness is 1.6 mm nominal. The KiCad file's 1.56252 mm is its stackup sum, not a specified finished thickness.
- Assembled envelope, connector overhang included, is 99.50 x 79.15 mm against a 99.50 x 78.00 mm board outline. The FEATURE SCHEDULE gives the extents.

## NOTES (continued)

- GENERAL TOLERANCE in the title block is a normal board-house figure, not one any source here states.
- Generated from the listed sources and not checked by a second party: there is no CHECKED field because nobody has signed it.

## SOURCES

- KiCad board file: <https://github.com/TinyTapeout/tt-demo-pcb> tinytapeout-demo.kicad\_pcb @ 028a51b1e - title block: TinyTapeout 06+ Demoboard rev 2.1.2, dated 2025-02-11
- Shuttle mapping: [https://docs.google.com/spreadsheets/d/1xD\\_uemuQcpUnXRY4twOrFzF0urJLVWMDqAnrOJLetM/edit?gid=1250963370](https://docs.google.com/spreadsheets/d/1xD_uemuQcpUnXRY4twOrFzF0urJLVWMDqAnrOJLetM/edit?gid=1250963370) - row "DB 06+ v2.1.2", Used by: TT08.

## HOLE SCHEDULE

| ID  | X mm  | Y mm  | DIA mm | KEEPOUT mm |
|-----|-------|-------|--------|------------|
| MT1 | 3.50  | 3.50  | 3.20   | 6.40       |
| MT2 | 96.00 | 8.00  | 3.20   | 6.40       |
| MT3 | 3.50  | 74.50 | 3.20   | 6.40       |
| MT4 | 96.00 | 74.50 | 3.20   | 6.40       |

## PMOD HOST HEADERS

| PORT   | REF | EDGE   | CX mm  | CY mm | PIN1 X mm | PIN1 Y mm |
|--------|-----|--------|--------|-------|-----------|-----------|
| INPUT  | J3  | bottom | 28.005 | 3.775 | 34.355    | 5.045     |
| BIDIR  | J5  | bottom | 50.865 | 3.775 | 57.215    | 5.045     |
| OUTPUT | J6  | bottom | 73.725 | 3.775 | 80.075    | 5.045     |

## FEATURE SCHEDULE

| #  | FEATURE                                  | X EXTENT mm    | Y EXTENT mm    |
|----|------------------------------------------|----------------|----------------|
| 1  | USB-C power / control                    | 60.78 to 71.42 | 69.73 to 79.15 |
| 2  | 7-segment display                        | 89.50 to 97.50 | 25.50 to 37.50 |
| 3  | LED D1                                   | 87.57 to 89.03 | 72.82 to 75.78 |
| 4  | LED D2                                   | 83.02 to 84.48 | 72.82 to 75.78 |
| 5  | LED D3                                   | 78.47 to 79.93 | 72.82 to 75.78 |
| 6  | Fourth indicator LED - not on this board | -              | -              |
| 7  | 8-way input DIP switch                   | 18.50 to 27.50 | 35.25 to 57.75 |
| 8  | Second DIP switch - not on this board    | -              | -              |
| 9  | Side Pmod J12 (not fitted)               | -7.95 to 6.90  | 7.15 to 23.40  |
| 10 | Side Pmod J13 (not fitted)               | -7.95 to 6.90  | 30.01 to 46.26 |
| 11 | Side Pmod J14 (not fitted)               | -7.95 to 6.90  | 52.87 to 69.12 |


## LEGEND

- Board outline
- Component body, scheduled
- Position not fitted on this revision
- Pmod connector body, hole keep-out
- Dimension, extension and leader

## DB 06+ V2.1.2

tinytapeout-demo rev 2.1.2

|                  |                   |                                                |       |
|------------------|-------------------|------------------------------------------------|-------|
| DRAWN            | VERSION           | UNITS                                          | SCALE |
| generated        | v0.0-88-g5151f5c+ | mm                                             | 1:1   |
| SIZE             | SHEET             | DRAWING NO                                     | REV   |
| A3               | 1 OF 1            | TT-DB-04                                       | A     |
| MATERIAL         |                   | GENERAL TOLERANCE                              |       |
| PCB, 1.6 nominal |                   | edge +/-0.20 hole pos +/-0.10 hole dia +/-0.08 |       |

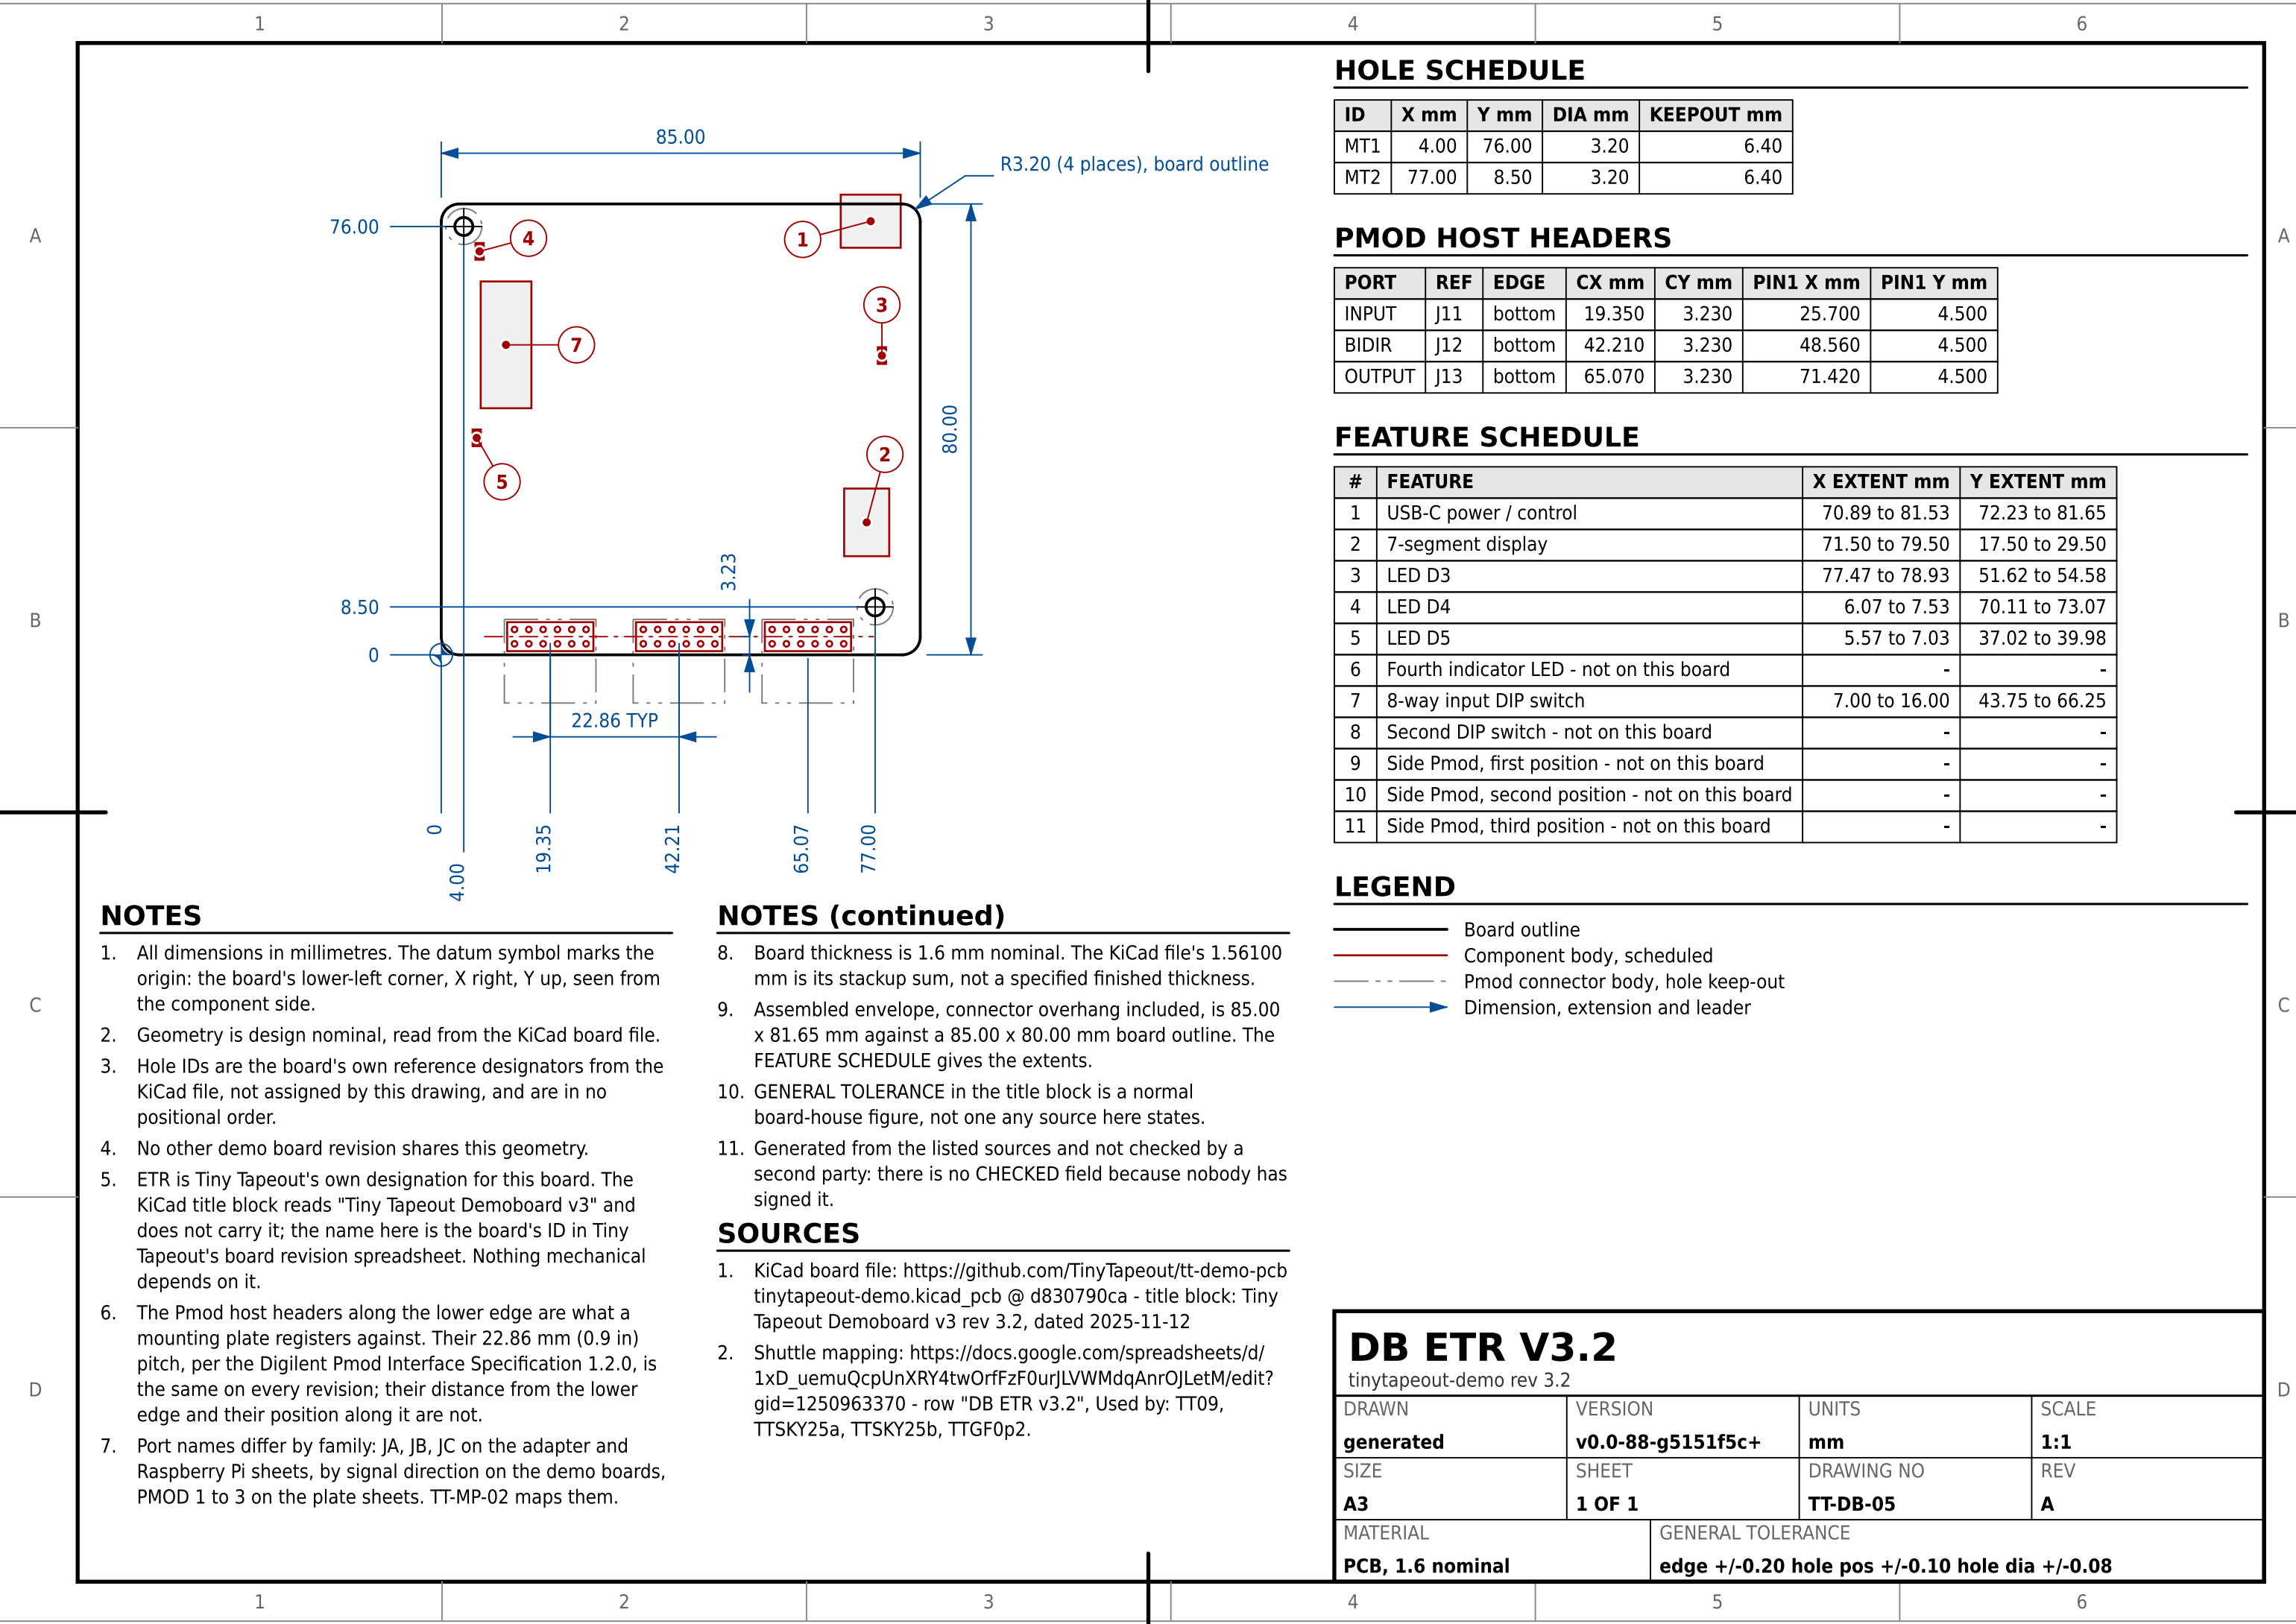

### NOTES

1. All dimensions in millimetres. The datum symbol marks the origin: the board's lower-left corner, X right, Y up, seen from the component side.
2. Geometry is design nominal, read from the KiCad board file.
3. Hole IDs are the board's own reference designators from the KiCad file, not assigned by this drawing, and are in no positional order.
4. No other demo board revision shares this geometry.
5. ETR is Tiny Tapeout's own designation for this board. The KiCad title block reads "Tiny Tapeout Demoboard v3" and does not carry it; the name here is the board's ID in Tiny Tapeout's board revision spreadsheet. Nothing mechanical depends on it.
6. The Pmod host headers along the lower edge are what a mounting plate registers against. Their 22.86 mm (0.9 in) pitch, per the Digilent Pmod Interface Specification 1.2.0, is the same on every revision; their distance from the lower edge and their position along it are not.
7. Port names differ by family: JA, JB, JC on the adapter and Raspberry Pi sheets, by signal direction on the demo boards, PMOD 1 to 3 on the plate sheets. TT-MP-02 maps them.

### NOTES (continued)

8. Board thickness is 1.6 mm nominal. The KiCad file's 1.56100 mm is its stackup sum, not a specified finished thickness.
9. Assembled envelope, connector overhang included, is 85.00 x 81.65 mm against a 85.00 x 80.00 mm board outline. The FEATURE SCHEDULE gives the extents.
10. GENERAL TOLERANCE in the title block is a normal board-house figure, not one any source here states.
11. Generated from the listed sources and not checked by a second party: there is no CHECKED field because nobody has signed it.

### SOURCES

1. KiCad board file: <https://github.com/TinyTapeout/tt-demo-pcb> tinytapeout-demo.kicad\_pcb @ d830790ca - title block: Tiny Tapeout Demoboard v3 rev 3.2, dated 2025-11-12
2. Shuttle mapping: [https://docs.google.com/spreadsheets/d/1xD\\_uemuQcpUnXRY4twOrffzF0urJLVWMDqAnrOJLetM/edit?gid=1250963370](https://docs.google.com/spreadsheets/d/1xD_uemuQcpUnXRY4twOrffzF0urJLVWMDqAnrOJLetM/edit?gid=1250963370) - row "DB ETR v3.2", Used by: TT09, TTSKY25a, TTSKY25b, TTGF0p2.

### HOLE SCHEDULE

| ID  | X mm  | Y mm  | DIA mm | KEEPOUT mm |
|-----|-------|-------|--------|------------|
| MT1 | 4.00  | 76.00 | 3.20   | 6.40       |
| MT2 | 77.00 | 8.50  | 3.20   | 6.40       |

### PMOD HOST HEADERS

| PORT   | REF | EDGE   | CX mm  | CY mm | PIN1 X mm | PIN1 Y mm |
|--------|-----|--------|--------|-------|-----------|-----------|
| INPUT  | J11 | bottom | 19.350 | 3.230 | 25.700    | 4.500     |
| BIDIR  | J12 | bottom | 42.210 | 3.230 | 48.560    | 4.500     |
| OUTPUT | J13 | bottom | 65.070 | 3.230 | 71.420    | 4.500     |

### FEATURE SCHEDULE

| #  | FEATURE                                        | X EXTENT mm    | Y EXTENT mm    |
|----|------------------------------------------------|----------------|----------------|
| 1  | USB-C power / control                          | 70.89 to 81.53 | 72.23 to 81.65 |
| 2  | 7-segment display                              | 71.50 to 79.50 | 17.50 to 29.50 |
| 3  | LED D3                                         | 77.47 to 78.93 | 51.62 to 54.58 |
| 4  | LED D4                                         | 6.07 to 7.53   | 70.11 to 73.07 |
| 5  | LED D5                                         | 5.57 to 7.03   | 37.02 to 39.98 |
| 6  | Fourth indicator LED - not on this board       | -              | -              |
| 7  | 8-way input DIP switch                         | 7.00 to 16.00  | 43.75 to 66.25 |
| 8  | Second DIP switch - not on this board          | -              | -              |
| 9  | Side Pmod, first position - not on this board  | -              | -              |
| 10 | Side Pmod, second position - not on this board | -              | -              |
| 11 | Side Pmod, third position - not on this board  | -              | -              |


### LEGEND

- Board outline
- Component body, scheduled
- Pmod connector body, hole keep-out
- Dimension, extension and leader

## DB ETR V3.2

tinytapeout-demo rev 3.2

|                  |                   |                                                |       |
|------------------|-------------------|------------------------------------------------|-------|
| DRAWN            | VERSION           | UNITS                                          | SCALE |
| generated        | v0.0-88-g5151f5c+ | mm                                             | 1:1   |
| SIZE             | SHEET             | DRAWING NO                                     | REV   |
| A3               | 1 OF 1            | TT-DB-05                                       | A     |
| MATERIAL         |                   | GENERAL TOLERANCE                              |       |
| PCB, 1.6 nominal |                   | edge +/-0.20 hole pos +/-0.10 hole dia +/-0.08 |       |

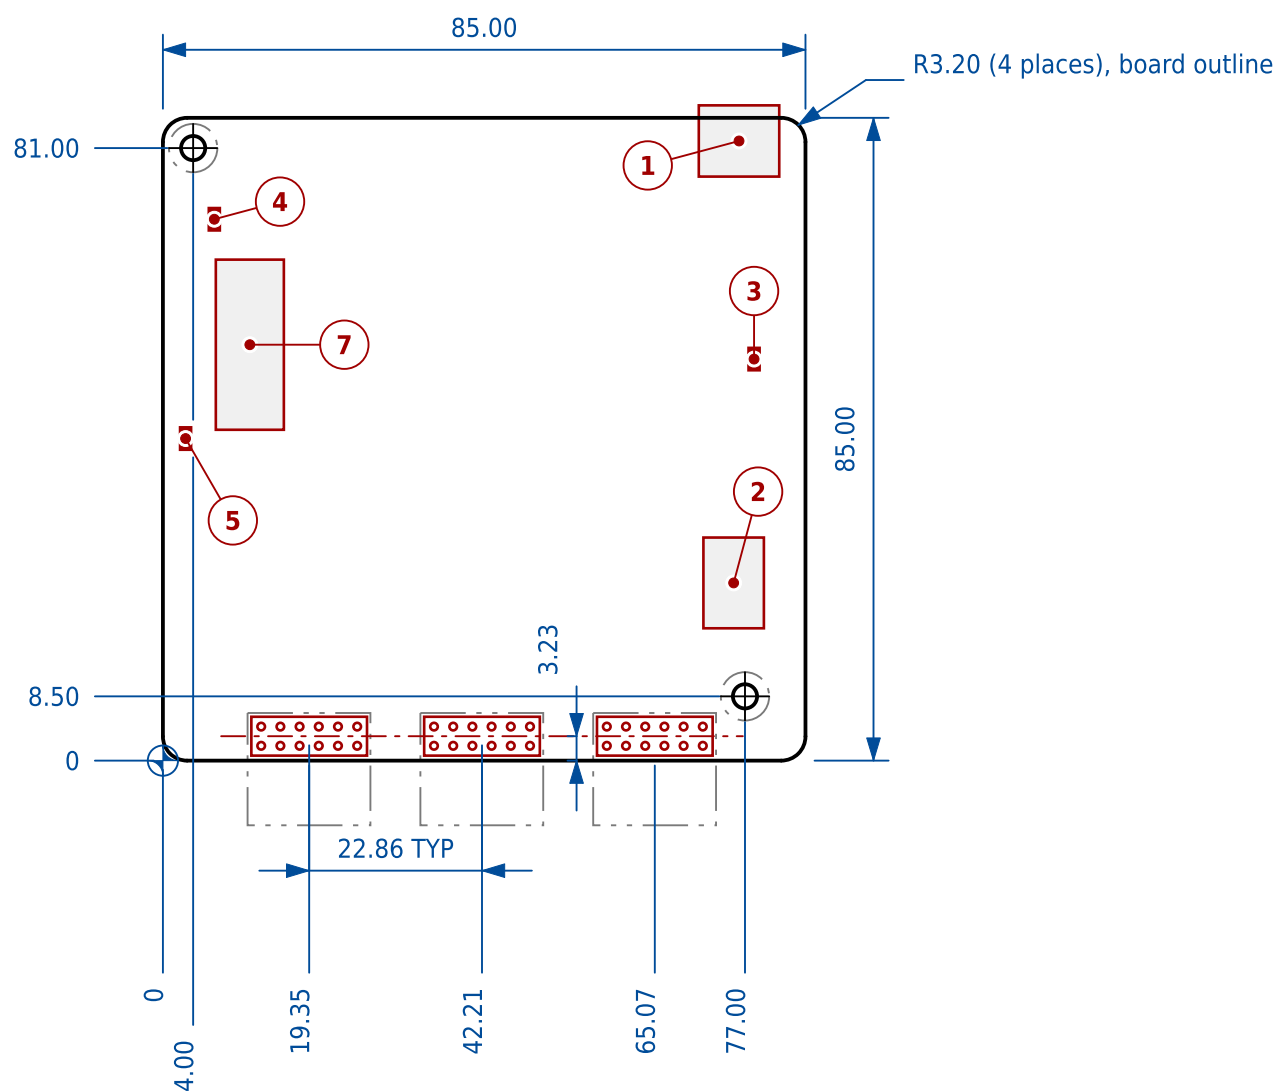

## NOTES

- All dimensions in millimetres. The datum symbol marks the origin: the board's lower-left corner, X right, Y up, seen from the component side.
- Geometry is design nominal, read from the KiCad board file.
- Hole IDs are the board's own reference designators from the KiCad file, not assigned by this drawing, and are in no positional order.
- No other demo board revision shares this geometry.
- This revision has no row in Tiny Tapeout's board revision spreadsheet, which lists DB ETR v3.2 as the current demoboard. The name used here follows that ID; no shuttle is known to have shipped on it.
- The Pmod host headers along the lower edge are what a mounting plate registers against. Their 22.86 mm (0.9 in) pitch, per the Digilent Pmod Interface Specification 1.2.0, is the same on every revision; their distance from the lower edge and their position along it are not.
- Port names differ by family: JA, JB, JC on the adapter and Raspberry Pi sheets, by signal direction on the demo boards, PMOD 1 to 3 on the plate sheets. TT-MP-02 maps them.
- Board thickness is 1.6 mm nominal. The KiCad file's 1.56100 mm is its stackup sum, not a specified finished thickness.

## NOTES (continued)

- Assembled envelope, connector overhang included, is 85.00 x 86.65 mm against a 85.00 x 85.00 mm board outline. The FEATURE SCHEDULE gives the extents.
- GENERAL TOLERANCE in the title block is a normal board-house figure, not one any source here states.
- Generated from the listed sources and not checked by a second party: there is no CHECKED field because nobody has signed it.

## SOURCES

- KiCad board file: <https://github.com/TinyTapeout/tt-demo-pcb> tinytapeout-demo.kicad\_pcb @ ecb636ace - title block: Tiny Tapeout Demoboard v3 rev 3.3, dated 2026-06-23
- Shuttle mapping: [https://docs.google.com/spreadsheets/d/1xD\\_uemuQcpUnXRY4twOrFzF0urJLVWMdqAnrOJLetM/edit?gid=1250963370](https://docs.google.com/spreadsheets/d/1xD_uemuQcpUnXRY4twOrFzF0urJLVWMdqAnrOJLetM/edit?gid=1250963370) - no row: this revision is not in the board revision spreadsheet, so no shuttle is recorded for it.

## HOLE SCHEDULE

| ID  | X mm  | Y mm  | DIA mm | KEEPOUT mm |
|-----|-------|-------|--------|------------|
| MT1 | 4.00  | 81.00 | 3.20   | 6.40       |
| MT2 | 77.00 | 8.50  | 3.20   | 6.40       |

## PMOD HOST HEADERS

| PORT   | REF | EDGE   | CX mm  | CY mm | PIN1 X mm | PIN1 Y mm |
|--------|-----|--------|--------|-------|-----------|-----------|
| INPUT  | J11 | bottom | 19.350 | 3.230 | 25.700    | 4.500     |
| BIDIR  | J12 | bottom | 42.210 | 3.230 | 48.560    | 4.500     |
| OUTPUT | J13 | bottom | 65.070 | 3.230 | 71.420    | 4.500     |

## FEATURE SCHEDULE

| #  | FEATURE                                        | X EXTENT mm    | Y EXTENT mm    |
|----|------------------------------------------------|----------------|----------------|
| 1  | USB-C power / control                          | 70.89 to 81.53 | 77.23 to 86.65 |
| 2  | 7-segment display                              | 71.50 to 79.50 | 17.50 to 29.50 |
| 3  | LED D3                                         | 77.47 to 78.93 | 51.62 to 54.58 |
| 4  | LED D4                                         | 6.07 to 7.53   | 70.11 to 73.07 |
| 5  | LED D5                                         | 2.27 to 3.73   | 41.11 to 44.07 |
| 6  | Fourth indicator LED - not on this board       | -              | -              |
| 7  | 8-way input DIP switch                         | 7.00 to 16.00  | 43.75 to 66.25 |
| 8  | Second DIP switch - not on this board          | -              | -              |
| 9  | Side Pmod, first position - not on this board  | -              | -              |
| 10 | Side Pmod, second position - not on this board | -              | -              |
| 11 | Side Pmod, third position - not on this board  | -              | -              |

## LEGEND

- Board outline
- Component body, scheduled
- Pmod connector body, hole keep-out
- Dimension, extension and leader

## DB ETR V3.3

tinytapeout-demo rev 3.3

|                  |                   |                                                |       |
|------------------|-------------------|------------------------------------------------|-------|
| DRAWN            | VERSION           | UNITS                                          | SCALE |
| generated        | v0.0-88-g5151f5c+ | mm                                             | 1:1   |
| SIZE             | SHEET             | DRAWING NO                                     | REV   |
| A3               | 1 OF 1            | TT-DB-06                                       | A     |
| MATERIAL         |                   | GENERAL TOLERANCE                              |       |
| PCB, 1.6 nominal |                   | edge +/-0.20 hole pos +/-0.10 hole dia +/-0.08 |       |