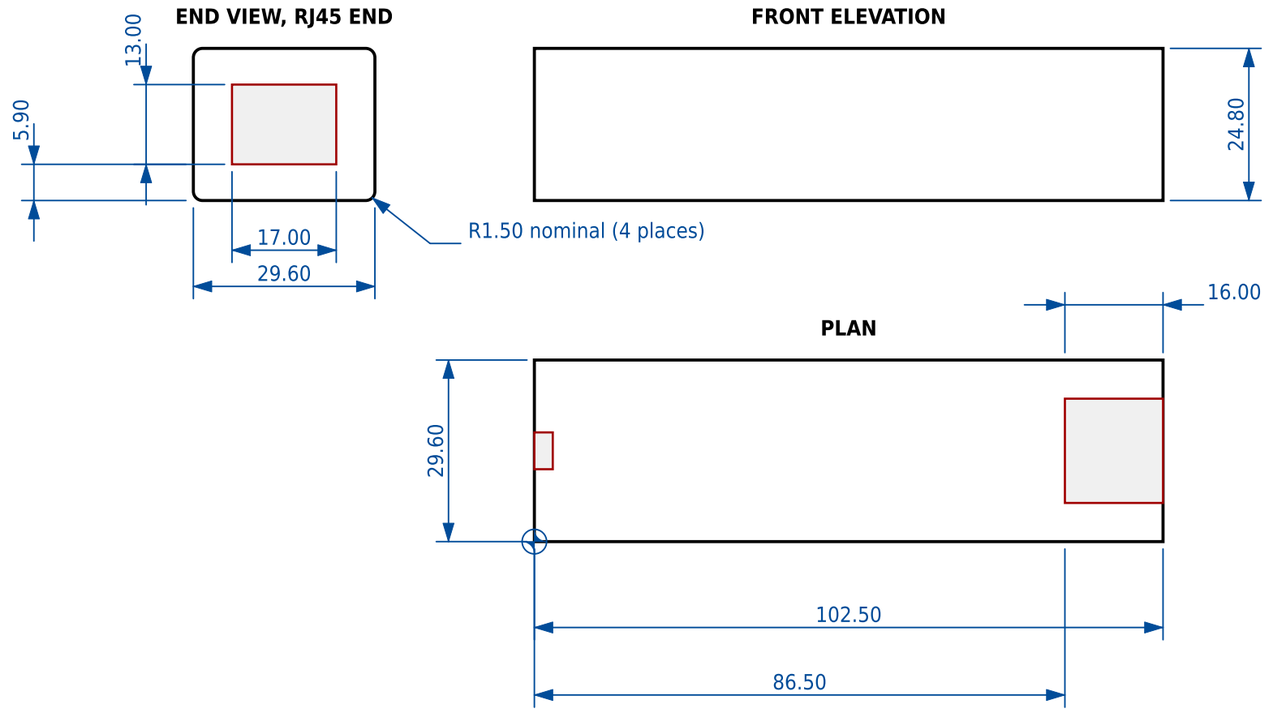


ENVELOPE

DIMENSION	mm
Overall length	102.50
Overall width	29.60
Overall height	24.80

FEATURES (PLAN VIEW)

FEATURE	X EXTENT mm	Y EXTENT mm
RJ45 PoE input, in the end plate	86.50 to 102.50	6.30 to 23.30
Output cable exit	0.00 to 3.00	11.80 to 17.80

SOURCES (continued)

2. Dimension drawing:
 https://www.waveshare.com/img/devkit/accBoard/POE-SPLITTER-25W-TYPE-C/POE-SPLITTER-25W-TYPE-C-details-size.jpg - Annotated 102.50 / 29.60 / 24.80, unit mm, matching the specification table.

NOTES

1. All dimensions in millimetres. The datum symbol on the plan marks the origin: the lower-left corner of the body envelope, X along the length, Y across the width, Z up.
2. First-angle projection. The plan is the view from above, placed below the front elevation; the end view is the view from the RJ45 end, placed to the left of it.
3. The RJ45 aperture drawn in the end view is a standard 8P8C jack envelope, positioned centrally because the vendor does not dimension it. Its size and position are indicative to about +/-1.5 mm; the body envelope itself is the dimension to trust.
4. The corner radius is nominal. It belongs to the body cross-section, so it appears in the end view only.
5. Output is 5 V at up to 5 A (25 W) on a USB-C male plug on a captive lead, not a panel-mounted receptacle.

NOTES (continued)

6. No panel mounting holes. Each end plate is retained by four corner screws, whose size and position the vendor does not publish, so any bracket has to clamp or strap the body.
7. Body is a finned aluminium extrusion; the fin profile is not dimensioned here and the outline is the overall envelope.

SOURCES

1. Product page:
 https://www.waveshare.com/poe-splitter-25w-type-c.htm - Specification table: "DIMENSIONS 102.5 x 29.6 x 24.8mm (L x W x H)"; "POE INPUT VOLTAGE 37V ~ 57V"; "POWER OUTPUT 5V 5A (MAX)"; IEEE 802.3af/at.

WAVESHARE POE SPLITTER (25 W), TYPE-C

POE-SPLITTER-25W-TYPE-C, extruded aluminium body

DRAWN	DATE	UNITS	SCALE
generated	**2026-09-10**	**mm**	**1:1**
SIZE	SHEET	DRAWING NO	REV
A3	**1 OF 1**	**ACC-02**	**A**
MATERIAL	GENERAL TOLERANCE		PROJECTION
sealed enclosure	**envelope +/-1.0 unless noted**		