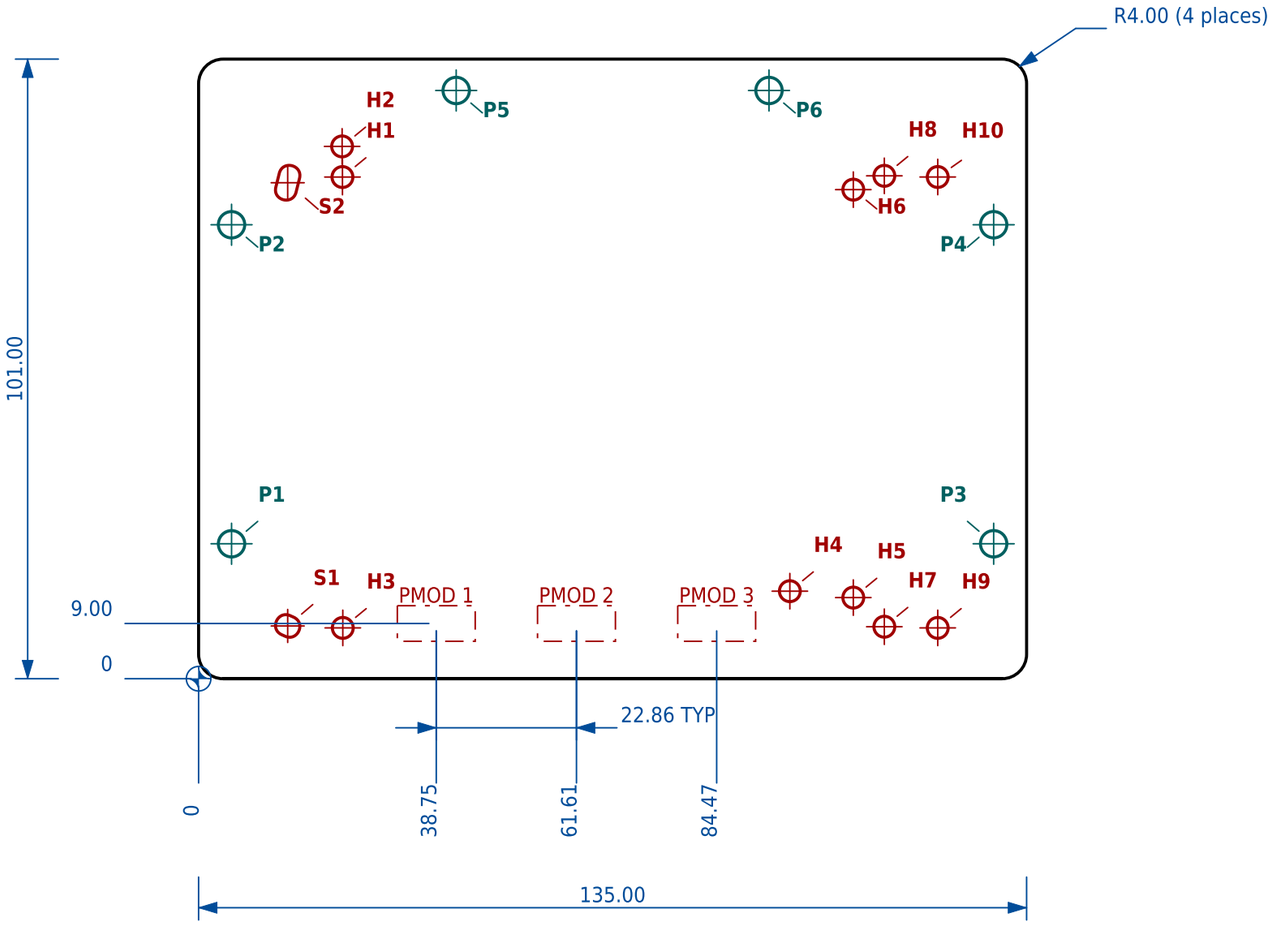


BOARD MOUNTING HOLES

ID	X mm	Y mm	SIZE mm	USED BY
H1	23.45	81.78	3.40	TT01-03:MT3, v3.2:MT1
H2	23.40	86.77	3.40	v3.3:MT1
H3	23.51	8.29	3.40	TT01-03:MT1
H4	96.40	14.27	3.40	v3.2:MT2, v3.3:MT2
H5	106.75	13.22	3.40	TT06-08:MT2
H6	106.75	79.72	3.40	TT06-08:MT4
H7	111.81	8.47	3.40	TT04-05:MT2
H8	111.81	81.97	3.40	TT04-05:MT4
H9	120.51	8.29	3.40	TT01-03:MT2
H10	120.51	81.78	3.40	TT01-03:MT4
S1	14.24 / 14.80	8.72 / 8.47	3.40 wide slot	TT04-05:MT1, TT06-08:MT1
S2	14.24 / 14.80	79.72 / 81.97	3.40 wide slot	TT04-05:MT3, TT06-08:MT3

PLATE FIXING HOLES

ID	X mm	Y mm	DIA mm
P1	5.37	22.00	4.30
P2	5.37	74.00	4.30
P3	129.63	22.00	4.30
P4	129.63	74.00	4.30
P5	42.00	95.89	4.30
P6	93.00	95.89	4.30

SOURCES

1. Derived from: data/tinytapeout_boards.py - Board outlines, mounting holes and Pmod host positions for every Tiny Tapeout demo board revision, extracted from the upstream KiCad files.
2. Pmod host pitch: https://digilent.com/reference/_media/reference/pmod/pmod-interface-specification-1_2_0.pdf - Digilent mandate .90 in (22.86 mm) between adjacent host ports on a board edge, which is why one plate can serve every revision.

NOTES

1. All dimensions in millimetres. The datum symbol marks the origin: the lower-left corner of the plate, X right, Y up, viewed from the side the demo board mounts on.
2. Hole positions are tabulated rather than dimensioned individually: there are too many to put on the view without it becoming unreadable.
3. The three PMOD envelopes are not machined features. They mark where the Pmod host pin fields end up, which is the same place for every board revision. That is the point of the plate.
4. A slot row gives two X and two Y values: the centres of its two ends. Its length is those centres apart plus the slot width.
5. Fit the board on standoffs. Each hole or slot is labelled with the board revisions that use it; a given board uses only its own.

NOTES (continued)

6. Holes are 3.4 mm, a close clearance fit on M3. Slots are the same width and span two revisions whose holes are too close together to drill separately.
7. The Pmod host connector bodies overhang the plate's front edge by 2.78 mm, so a peripheral module plugs into clear air.
8. Plate fixing holes are 4.3 mm, a clearance fit on M4.
9. Fit the plate to its chassis before fitting a demo board: the plate fixings sit in the border, but the board overhangs part of it.
10. Suggested material 3 mm acrylic or 1.6 mm FR4. Least material between any two features is about 1.6 mm, between H2 and H3.

TINY TAPEOUT GENERIC MOUNTING PLATE

Accepts every demo board revision, Pmod hosts fixed in place

DRAWN	DATE	UNITS	SCALE
generated	**2026-09-10**	**mm**	**1:1**
SIZE	SHEET	DRAWING NO	REV
A3	**1 OF 1**	**TT-MP-01**	**A**
MATERIAL	GENERAL TOLERANCE		PROJECTION
3 mm sheet	**edge +/-0.20 hole pos +/-0.10 hole dia +/-0.08**		