


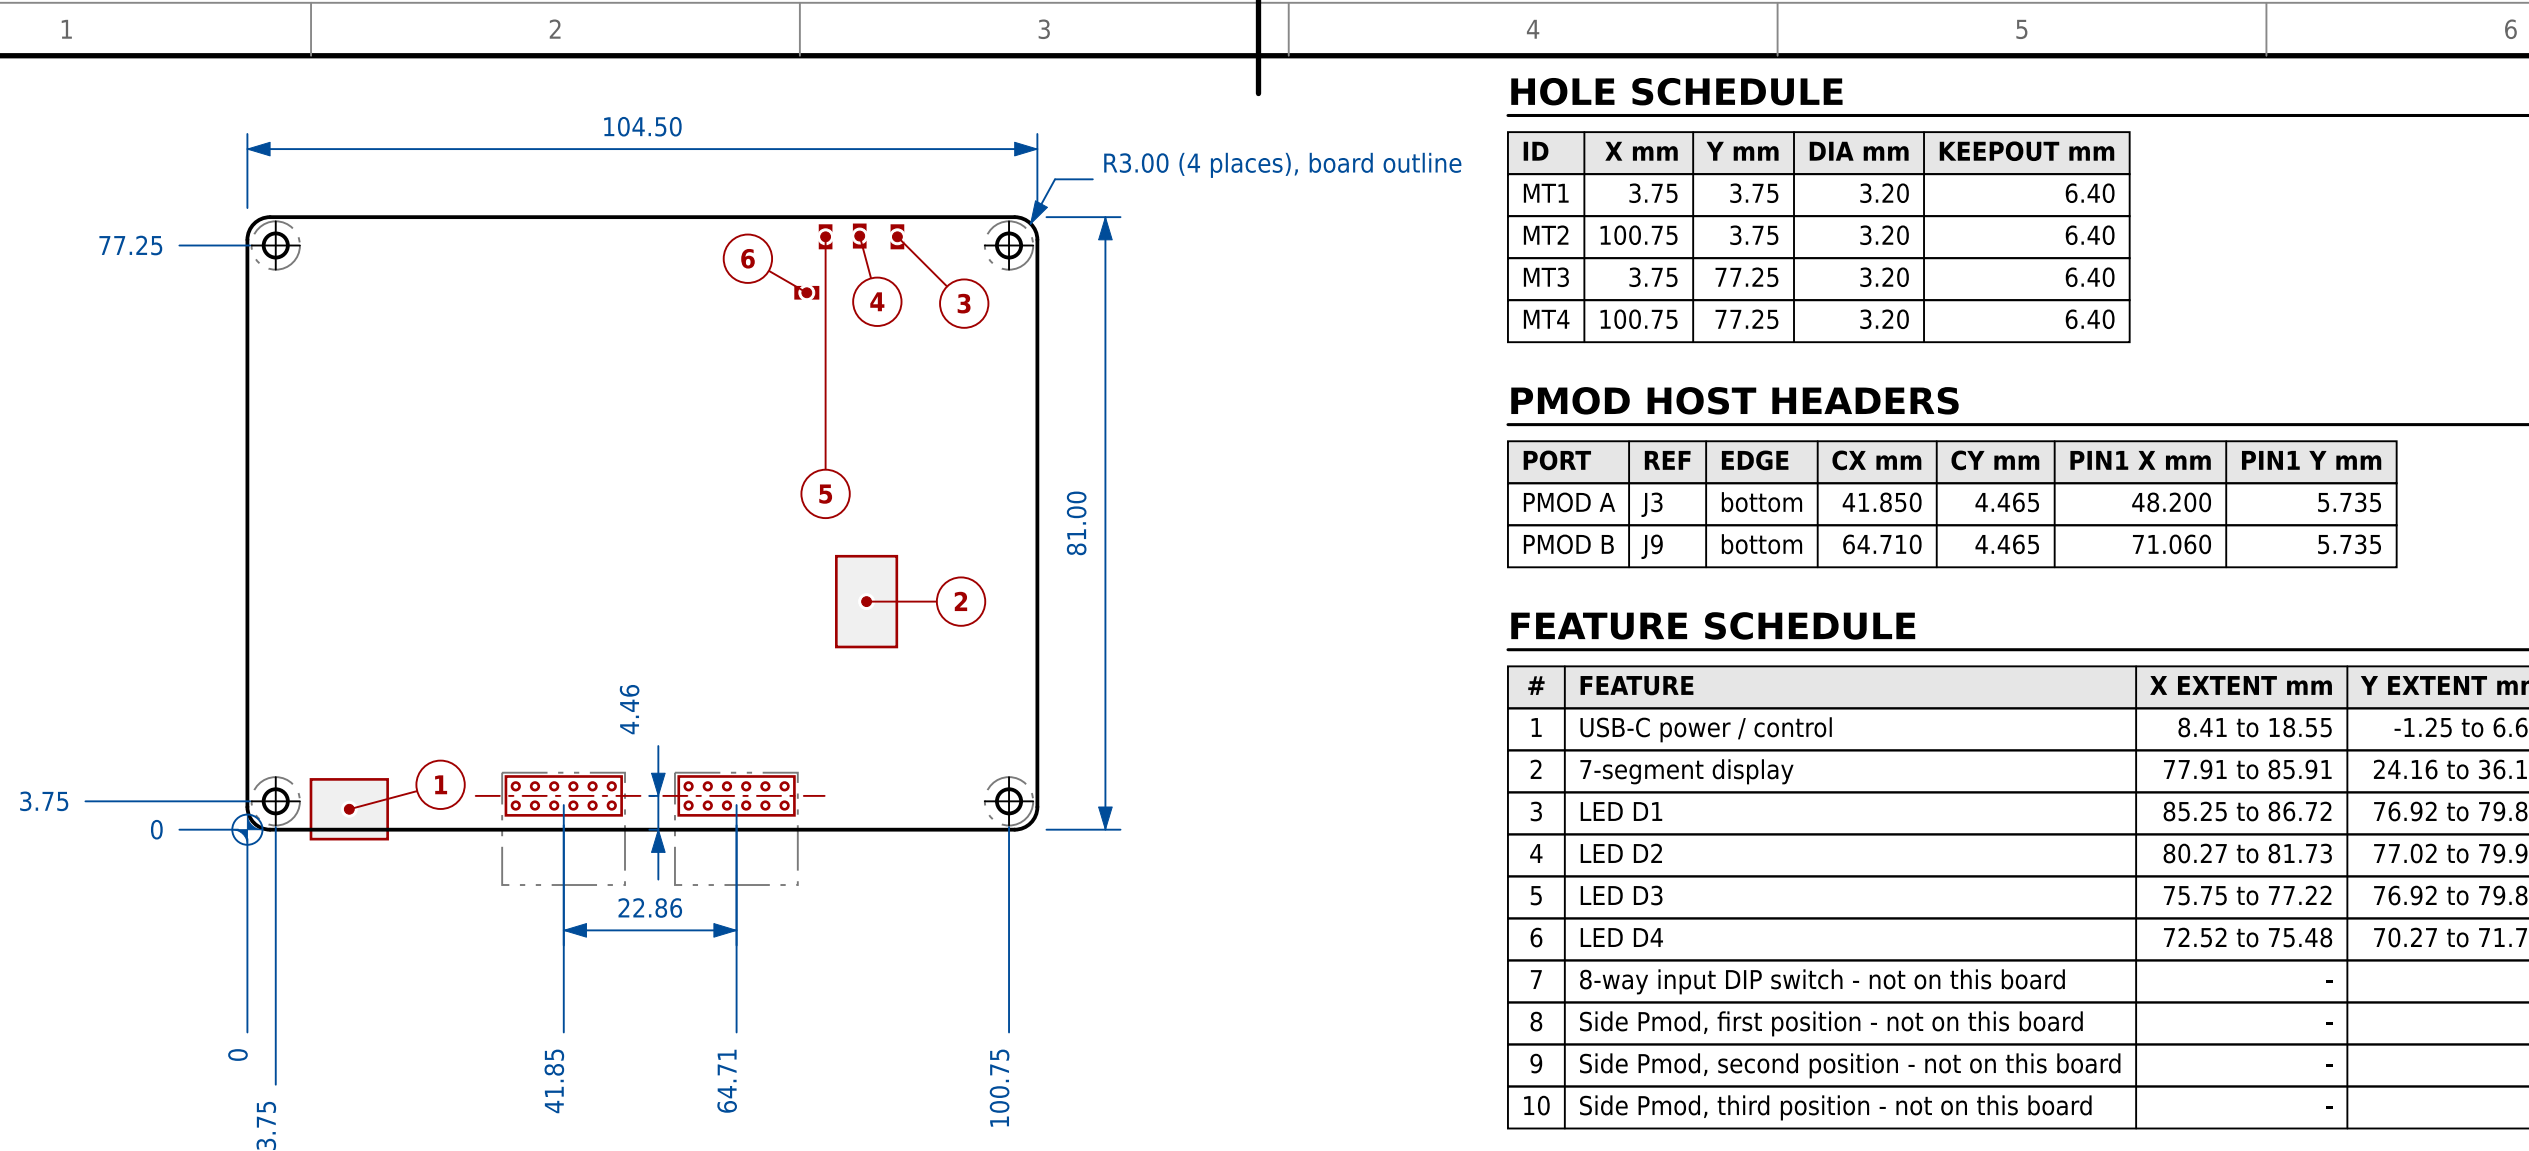

NOTES

- All dimensions in millimetres. The datum symbol marks the origin: the board's lower-left corner, X right, Y up, seen from the component side.
- Geometry is design nominal, read from the KiCad board file.
- Hole IDs are the board's own reference designators from the KiCad file, not assigned by this drawing, and are in no positional order.
- The title block reads "TinyTapeout 1,2,3 Demo Board", but no PCB served TT01: that was a bare-die trial run.
- This sheet covers revisions 2.2.5 and 2.2.6: the same board mechanically, compared feature by feature before merging. Only the electrical design and the shuttle differ.
- The Pmod host headers along the lower edge are what a mounting plate registers against. Their 22.86 mm (0.9 in) pitch, per the Digilent Pmod Interface Specification 1.2.0, is the same on every revision; their distance from the lower edge and their position along it are not.
- The chain-double-dot rectangle at each Pmod host is the connector body where it overhangs the edge: what a peripheral and a bracket must clear.
- Pmod host coordinates are given to three decimals, unlike the rest of this sheet. Rounded to two, adjacent hosts print 22.85 apart and contradict the 22.86 pitch dimensioned here.

NOTES (continued)

- Port names differ by family: JA, JB, JC on the adapter and Raspberry Pi sheets, by signal direction on the demo boards, PMOD 1 to 3 on the plate sheets. TT-MP-02 maps them.
- Board thickness is 1.6 mm nominal. The KiCad file's 1.60000 mm is its stackup sum, not a specified finished thickness.
- Assembled envelope, connector overhang included, is 104.50 x 82.25 mm against a 104.50 x 81.00 mm board outline. The FEATURE SCHEDULE gives the extents.
- Feature numbers are fixed across this family, so a number means the same part on every sheet. A part this board does not carry still has a row, marked as such.
- GENERAL TOLERANCE in the title block is a normal board-house figure, not one any source here states.
- Generated from the listed sources and not checked by a second party: there is no CHECKED field because nobody has signed it.

SOURCES

- KiCad board file: <https://github.com/TinyTapeout/tt123-demo-pcb> mpw-mb1.kicad_pcb @ 303509a - title block: TinyTapeout 1,2,3 Demo Board rev 2.2.5, dated 2023-11-13

HOLE SCHEDULE

ID	X mm	Y mm	DIA mm	KEEPOUT mm
MT1	3.75	3.75	3.20	6.40
MT2	100.75	3.75	3.20	6.40
MT3	3.75	77.25	3.20	6.40
MT4	100.75	77.25	3.20	6.40

PMOD HOST HEADERS

PORT	REF	EDGE	CX mm	CY mm	PIN1 X mm	PIN1 Y mm
PMOD A	J3	bottom	41.850	4.465	48.200	5.735
PMOD B	J9	bottom	64.710	4.465	71.060	5.735

FEATURE SCHEDULE

#	FEATURE	X EXTENT mm	Y EXTENT mm
1	USB-C power / control	8.41 to 18.55	-1.25 to 6.65
2	7-segment display	77.91 to 85.91	24.16 to 36.16
3	LED D1	85.25 to 86.72	76.92 to 79.88
4	LED D2	80.27 to 81.73	77.02 to 79.98
5	LED D3	75.75 to 77.22	76.92 to 79.88
6	LED D4	72.52 to 75.48	70.27 to 71.73
7	8-way input DIP switch - not on this board	-	-
8	Side Pmod, first position - not on this board	-	-
9	Side Pmod, second position - not on this board	-	-
10	Side Pmod, third position - not on this board	-	-

LEGEND

- Board outline
- Component body, scheduled
- Pmod connector body, hole keep-out
- Dimension, extension and leader

SOURCES (continued)

- KiCad board file: <https://github.com/TinyTapeout/tt123-demo-pcb> mpw-mb1.kicad_pcb @ 3d721a6 - title block: TinyTapeout 1,2,3 Demo Board rev 2.2.6, dated 2024-02-14
- Shuttle mapping: https://docs.google.com/spreadsheets/d/1xD_uemuQcpUnXRY4twOrfFzF0urJLVWMdqAnrOJLetM/edit?gid=1250963370 - used by: TT02, TT03

DB MPW V2.2.5 / DB MPW V2.2.6

mpw-mb1 rev 2.2.5 and 2.2.6


DRAWN	VERSION	UNITS	SCALE
generated	v0.0-83-g296ee10+	mm	1:1
SIZE	SHEET	DRAWING NO	REV
A3	1 OF 1	TT-DB-01	A
MATERIAL		GENERAL TOLERANCE	
PCB, 1.6 nominal		edge +/-0.20 hole pos +/-0.10 hole dia +/-0.08	

A

B

C

D

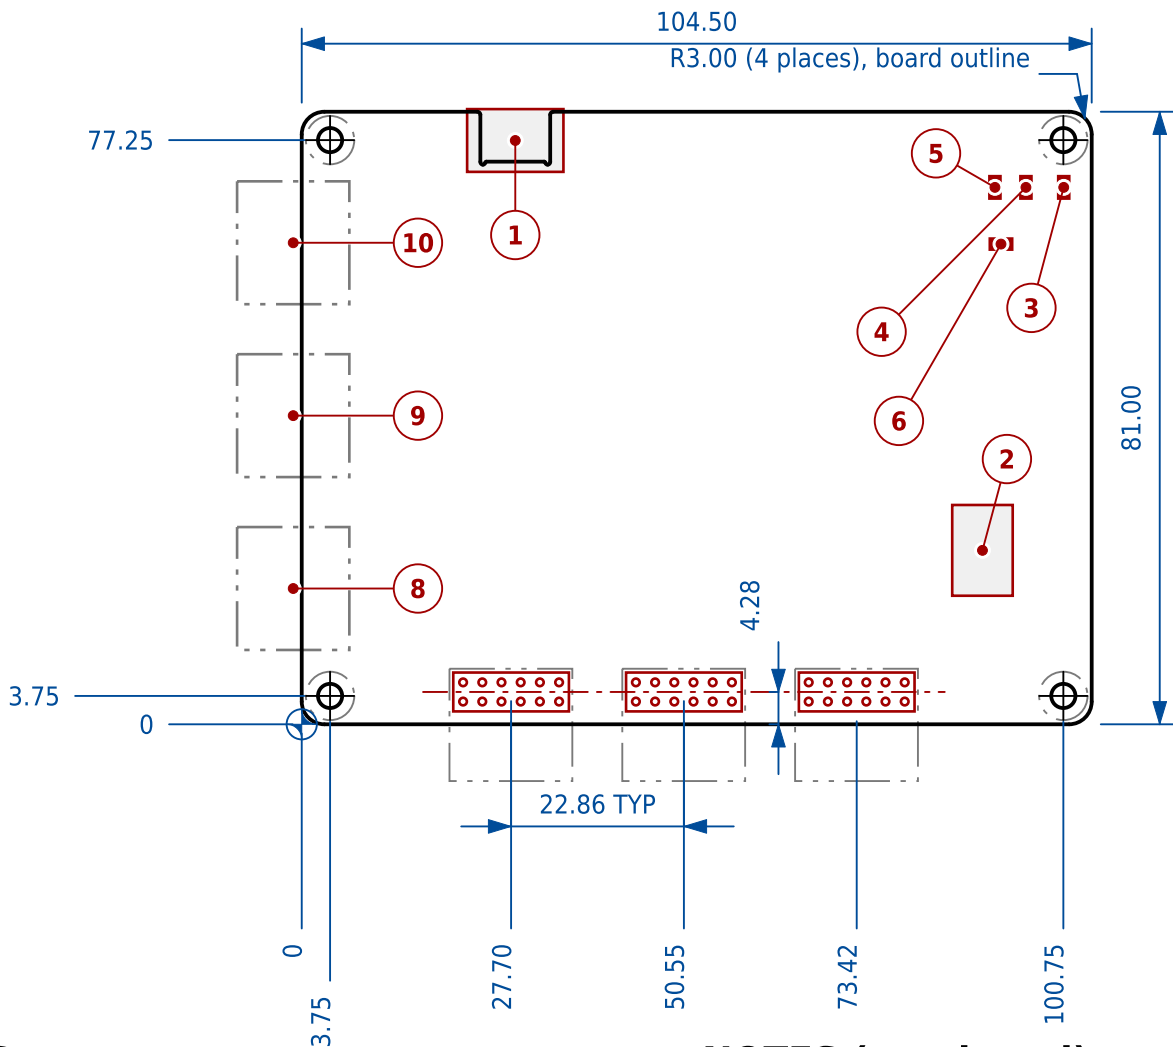

NOTES

1. All dimensions in millimetres. The datum symbol marks the origin: the board's lower-left corner, X right, Y up, seen from the component side.
2. Geometry is design nominal, read from the KiCad board file.
3. Hole IDs are the board's own reference designators from the KiCad file, not assigned by this drawing, and are in no positional order.
4. v1.2.2c is an assembly variant, not a layout change: no X1, a 0R at R51. Its KiCad title block reads rev 1.2.3.
5. This sheet covers revisions 1.2.2 and 1.2.3: the same board mechanically, compared feature by feature before merging. Only the electrical design and the shuttle differ.
6. The Pmod host headers along the lower edge are what a mounting plate registers against. Their 22.86 mm (0.9 in) pitch, per the Digilent Pmod Interface Specification 1.2.0, is the same on every revision; their distance from the lower edge and their position along it are not.
7. The chain-double-dot rectangle at each Pmod host is the connector body where it overhangs the edge: what a peripheral and a bracket must clear.
8. Pmod host coordinates are given to three decimals, unlike the rest of this sheet. Rounded to two, adjacent hosts print 22.85 apart and contradict the 22.86 pitch dimensioned here.

NOTES (continued)

9. Port names differ by family: JA, JB, JC on the adapter and Raspberry Pi sheets, by signal direction on the demo boards, PMOD 1 to 3 on the plate sheets. TT-MP-02 maps them.
10. Board thickness is 1.6 mm nominal. The KiCad file's 1.56252 mm is its stackup sum, not a specified finished thickness.
11. Assembled envelope, connector overhang included, is 104.50 x 81.35 mm against a 104.50 x 81.00 mm board outline. The FEATURE SCHEDULE gives the extents.
12. Upper edge carries a shallow recess for the USB-C shell, contributed by the connector footprint's own edge cuts (fillet radii 0.136 mm, 0.303 mm, 0.364 mm, 0.400 mm).
13. Feature numbers are fixed across this family, so a number means the same part on every sheet. A part this board does not carry still has a row, marked as such.
14. GENERAL TOLERANCE in the title block is a normal board-house figure, not one any source here states.
15. Generated from the listed sources and not checked by a second party: there is no CHECKED field because nobody has signed it.

SOURCES

1. KiCad board file: <https://github.com/TinyTapeout/tt-demo-pcb> tinytapeout-demo.kicad_pcb @ cfdd80d7b - title block: TinyTapeout 4+ Demoboard rev 1.2.2, dated 2024-04-26

HOLE SCHEDULE

ID	X mm	Y mm	DIA mm	KEEPOUT mm
MT1	3.75	3.75	3.20	6.40
MT2	100.75	3.75	3.20	6.40
MT3	3.75	77.25	3.20	6.40
MT4	100.75	77.25	3.20	6.40

PMOD HOST HEADERS

PORT	REF	EDGE	CX mm	CY mm	PIN1 X mm	PIN1 Y mm
INPUT	J3	bottom	27.695	4.275	34.045	5.545
BIDIR	J5	bottom	50.555	4.275	56.905	5.545
OUTPUT	J6	bottom	73.415	4.275	79.765	5.545

FEATURE SCHEDULE

#	FEATURE	X EXTENT mm	Y EXTENT mm
1	USB-C power / control	21.88 to 34.62	73.05 to 81.35
2	7-segment display	86.05 to 94.05	17.00 to 29.00
3	LED D1	100.07 to 101.53	69.52 to 72.48
4	LED D2	95.07 to 96.53	69.52 to 72.48
5	LED D3	90.97 to 92.43	69.52 to 72.48
6	LED D4	91.02 to 93.98	62.77 to 64.23
7	8-way input DIP switch - not on this board	-	-
8	Side Pmod J12 (not fitted)	-8.55 to 6.30	9.83 to 26.08
9	Side Pmod J13 (not fitted)	-8.55 to 6.30	32.69 to 48.94
10	Side Pmod J14 (not fitted)	-8.55 to 6.30	55.55 to 71.80

LEGEND

- Board outline
- Component body, scheduled
- Position not fitted on this revision
- Pmod connector body, hole keep-out
- Dimension, extension and leader

SOURCES (continued)

2. KiCad board file: <https://github.com/TinyTapeout/tt-demo-pcb> tinytapeout-demo.kicad_pcb @ a88cbc08b - title block: TinyTapeout 4+ Demoboard rev 1.2.3, dated 2024-06-11
3. Shuttle mapping: https://docs.google.com/spreadsheets/d/1xD_uemuQcpUnXRY4twOrFzF0urJLVWMdqAnrOJLetM/edit?gid=1250963370 - used by: TT04, TT05

DB 4+ V1.2.2 / DB 4+ V1.2.2C

tinytapeout-demo rev 1.2.2 and 1.2.3

DRAWN	VERSION	UNITS	SCALE
generated	v0.0-83-g296ee10+	mm	1:1
SIZE	SHEET	DRAWING NO	REV
A3	1 OF 1	TT-DB-02	A
MATERIAL		GENERAL TOLERANCE	
PCB, 1.6 nominal		edge +/-0.20 hole pos +/-0.10 hole dia +/-0.08	

A

B

C

D

A

B

C


D

A

B

C

D

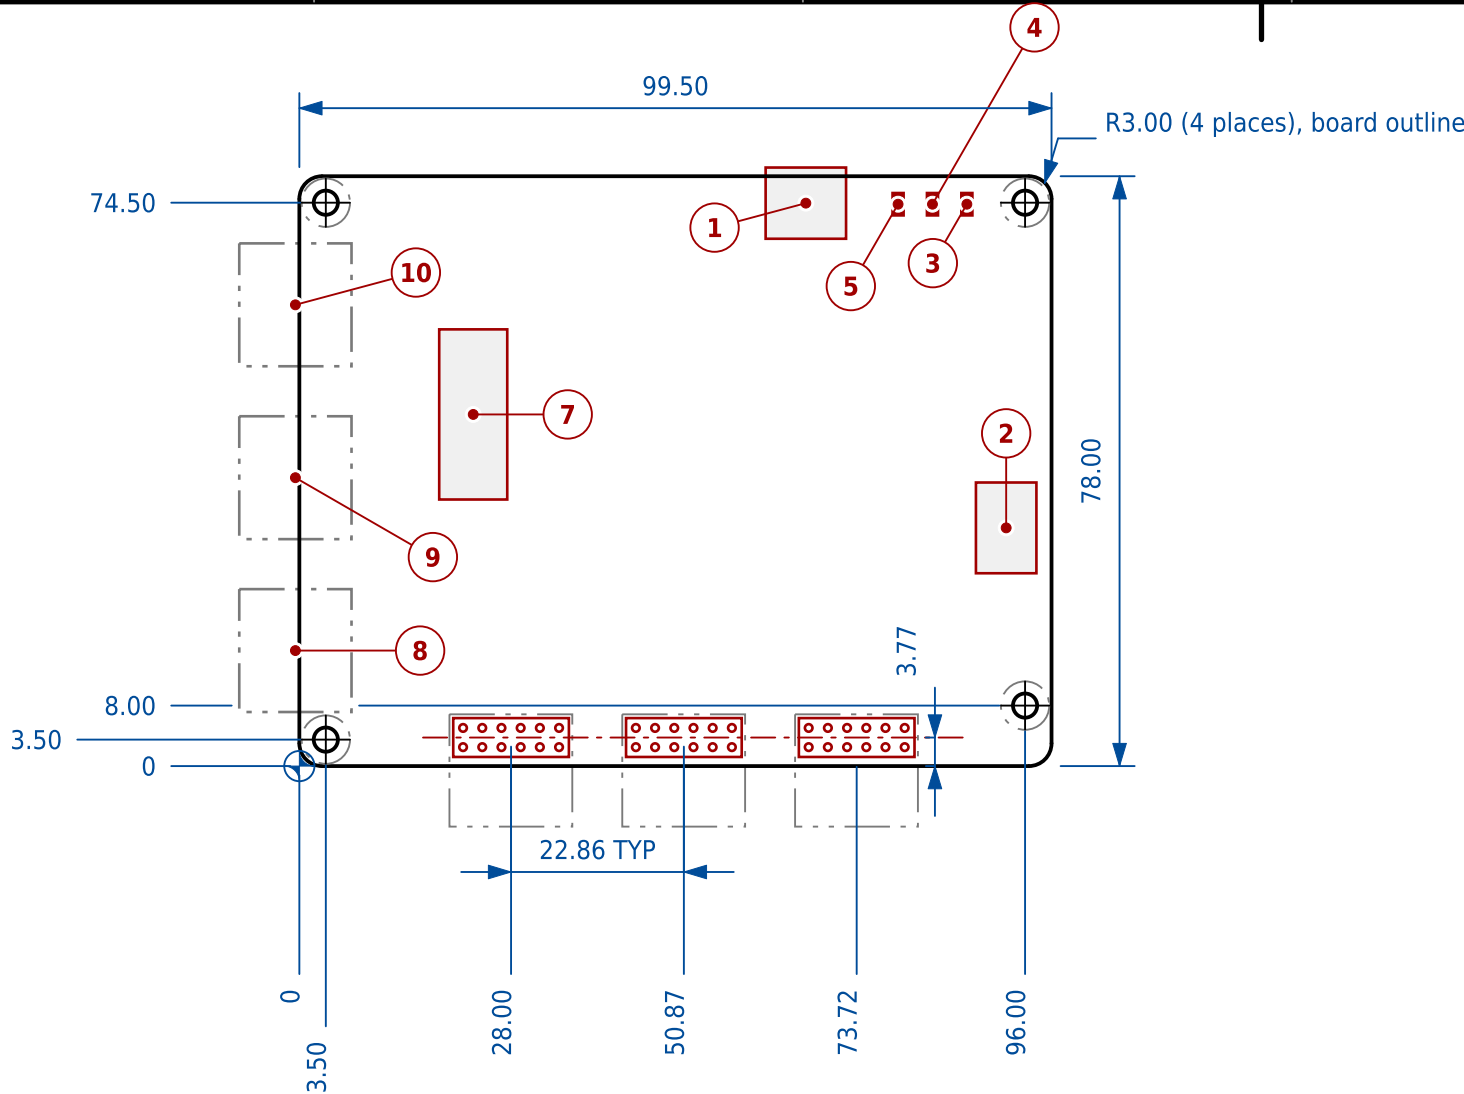

NOTES

- All dimensions in millimetres. The datum symbol marks the origin: the board's lower-left corner, X right, Y up, seen from the component side.
- Geometry is design nominal, read from the KiCad board file.
- Hole IDs are the board's own reference designators from the KiCad file, not assigned by this drawing, and are in no positional order.
- This sheet covers revisions 2.0.1 and 2.1.0: the same board mechanically, compared feature by feature before merging. Only the electrical design and the shuttle differ.
- The Pmod host headers along the lower edge are what a mounting plate registers against. Their 22.86 mm (0.9 in) pitch, per the Digilent Pmod Interface Specification 1.2.0, is the same on every revision; their distance from the lower edge and their position along it are not.
- The chain-double-dot rectangle at each Pmod host is the connector body where it overhangs the edge: what a peripheral and a bracket must clear.
- Pmod host coordinates are given to three decimals, unlike the rest of this sheet. Rounded to two, adjacent hosts print 22.85 apart and contradict the 22.86 pitch dimensioned here.

NOTES (continued)

- Port names differ by family: JA, JB, JC on the adapter and Raspberry Pi sheets, by signal direction on the demo boards, PMOD 1 to 3 on the plate sheets. TT-MP-02 maps them.
- Board thickness is 1.6 mm nominal. The KiCad file's 1.56252 mm is its stackup sum, not a specified finished thickness.
- Assembled envelope, connector overhang included, is 99.50 x 79.15 mm against a 99.50 x 78.00 mm board outline. The FEATURE SCHEDULE gives the extents.
- Feature numbers are fixed across this family, so a number means the same part on every sheet. A part this board does not carry still has a row, marked as such.
- GENERAL TOLERANCE in the title block is a normal board-house figure, not one any source here states.
- Generated from the listed sources and not checked by a second party: there is no CHECKED field because nobody has signed it.

SOURCES

- KiCad board file: <https://github.com/TinyTapeout/tt-demo-pcb> tinytapeout-demo.kicad_pcb @ 292760e1f - title block: TinyTapeout 06+ Demoboard rev 2.0.1, dated 2024-09-05
- KiCad board file: <https://github.com/TinyTapeout/tt-demo-pcb> tinytapeout-demo.kicad_pcb @ a799acb38 - title block: TinyTapeout 06+ Demoboard rev 2.1.0, dated 2024-12-10

HOLE SCHEDULE

ID	X mm	Y mm	DIA mm	KEEPOUT mm
MT1	3.50	3.50	3.20	6.40
MT2	96.00	8.00	3.20	6.40
MT3	3.50	74.50	3.20	6.40
MT4	96.00	74.50	3.20	6.40

PMOD HOST HEADERS

PORT	REF	EDGE	CX mm	CY mm	PIN1 X mm	PIN1 Y mm
INPUT	J3	bottom	28.005	3.775	34.355	5.045
BIDIR	J5	bottom	50.865	3.775	57.215	5.045
OUTPUT	J6	bottom	73.725	3.775	80.075	5.045

FEATURE SCHEDULE

#	FEATURE	X EXTENT mm	Y EXTENT mm
1	USB-C power / control	61.68 to 72.32	69.73 to 79.15
2	7-segment display	89.50 to 97.50	25.50 to 37.50
3	LED D1	87.57 to 89.03	72.82 to 75.78
4	LED D2	83.02 to 84.48	72.82 to 75.78
5	LED D3	78.47 to 79.93	72.82 to 75.78
6	Fourth indicator LED - not on this board	-	-
7	8-way input DIP switch	18.50 to 27.50	35.25 to 57.75
8	Side Pmod J12 (not fitted)	-7.95 to 6.90	7.15 to 23.40
9	Side Pmod J13 (not fitted)	-7.95 to 6.90	30.01 to 46.26
10	Side Pmod J14 (not fitted)	-7.95 to 6.90	52.87 to 69.12

LEGEND

- Board outline
- Component body, scheduled
- Position not fitted on this revision
- Pmod connector body, hole keep-out
- Dimension, extension and leader


SOURCES (continued)

- Shuttle mapping:
https://docs.google.com/spreadsheets/d/1xD_uemuQcpUnXRY4twOrfFzF0urjLVWMdqAnrOJLetM/edit?gid=1250963370 - used by: TT06, TT07

DB 06+ V2.0.1 / DB 06+ V2.1.0

tinytapeout-demo rev 2.0.1 and 2.1.0

DRAWN	VERSION	UNITS	SCALE
generated	v0.0-83-g296ee10+	mm	1:1
SIZE	SHEET	DRAWING NO	REV
A3	1 OF 1	TT-DB-03	A
MATERIAL		GENERAL TOLERANCE	
PCB, 1.6 nominal		edge +/-0.20 hole pos +/-0.10 hole dia +/-0.08	

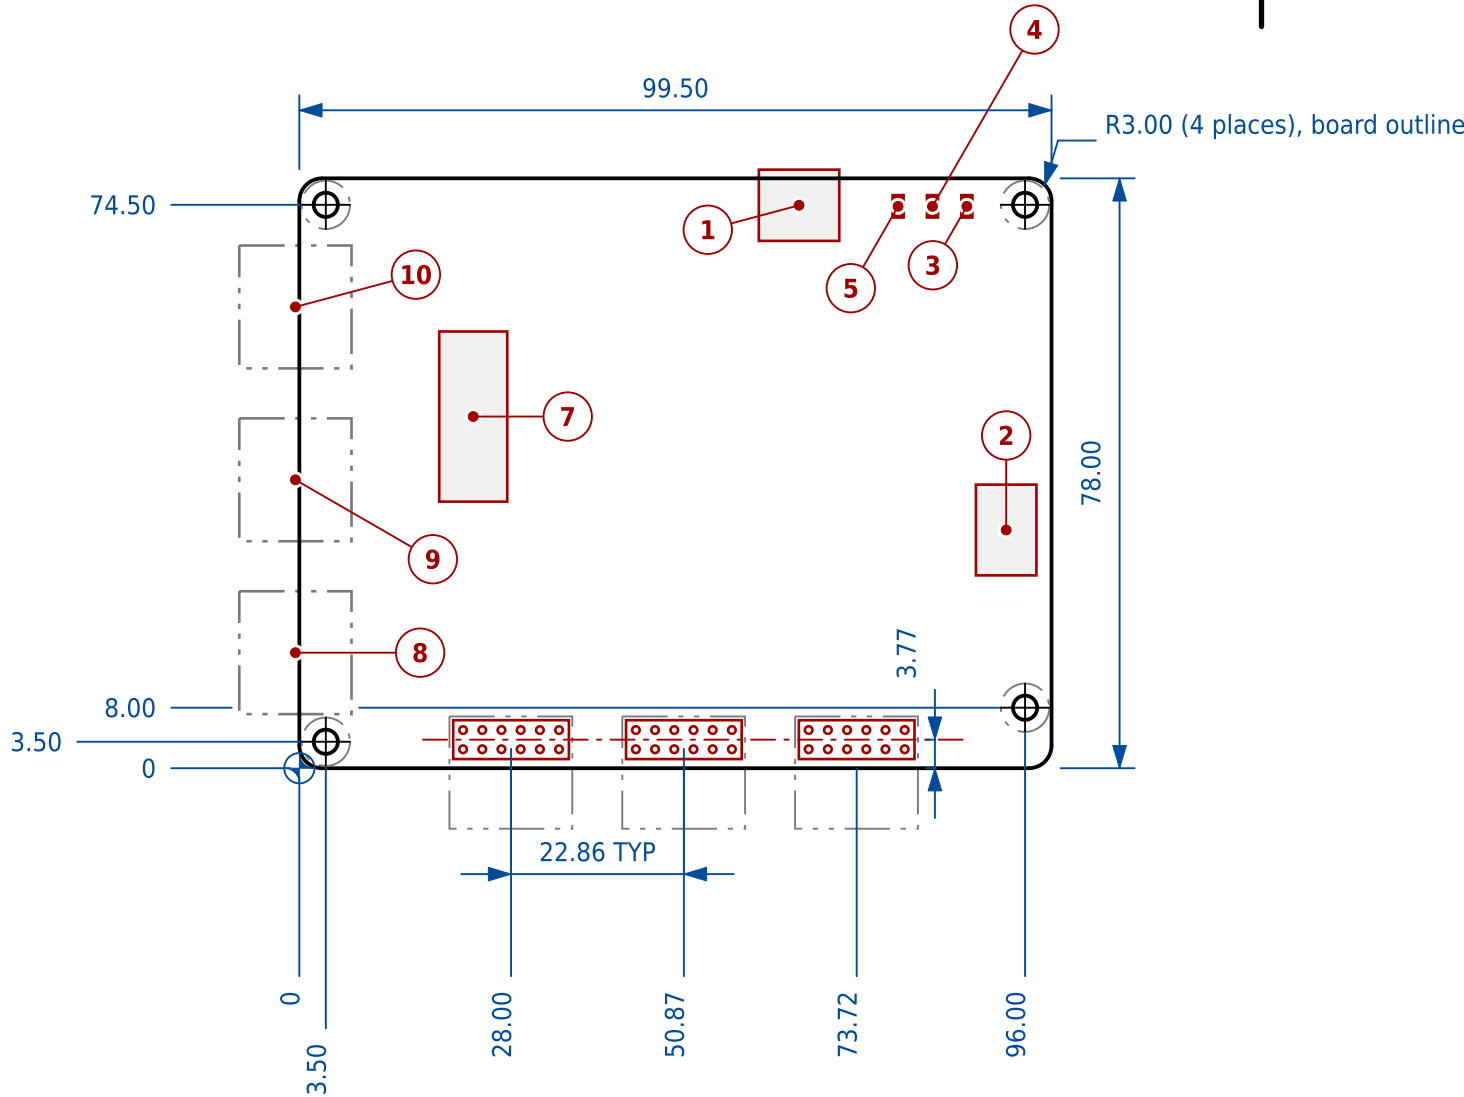

NOTES

- All dimensions in millimetres. The datum symbol marks the origin: the board's lower-left corner, X right, Y up, seen from the component side.
- Geometry is design nominal, read from the KiCad board file.
- Hole IDs are the board's own reference designators from the KiCad file, not assigned by this drawing, and are in no positional order.
- No other demo board revision shares this geometry.
- The Pmod host headers along the lower edge are what a mounting plate registers against. Their 22.86 mm (0.9 in) pitch, per the Digilent Pmod Interface Specification 1.2.0, is the same on every revision; their distance from the lower edge and their position along it are not.
- The chain-double-dot rectangle at each Pmod host is the connector body where it overhangs the edge: what a peripheral and a bracket must clear.
- Pmod host coordinates are given to three decimals, unlike the rest of this sheet. Rounded to two, adjacent hosts print 22.85 apart and contradict the 22.86 pitch dimensioned here.
- Port names differ by family: JA, JB, JC on the adapter and Raspberry Pi sheets, by signal direction on the demo boards, PMOD 1 to 3 on the plate sheets. TT-MP-02 maps them.

NOTES (continued)

- Board thickness is 1.6 mm nominal. The KiCad file's 1.56252 mm is its stackup sum, not a specified finished thickness.
- Assembled envelope, connector overhang included, is 99.50 x 79.15 mm against a 99.50 x 78.00 mm board outline. The FEATURE SCHEDULE gives the extents.
- Feature numbers are fixed across this family, so a number means the same part on every sheet. A part this board does not carry still has a row, marked as such.
- GENERAL TOLERANCE in the title block is a normal board-house figure, not one any source here states.
- Generated from the listed sources and not checked by a second party: there is no CHECKED field because nobody has signed it.

SOURCES

- KiCad board file: <https://github.com/TinyTapeout/tt-demo-pcb> tinytapeout-demo.kicad_pcb @ 028a51b1e - title block: TinyTapeout 06+ Demoboard rev 2.1.2, dated 2025-02-11
- Shuttle mapping: https://docs.google.com/spreadsheets/d/1xD_uemuQcpUnXRY4twOrFzF0urJLVWMdqAnrOJLetM/edit?gid=1250963370 - row "DB 06+ v2.1.2", Used by: TT08.

HOLE SCHEDULE

ID	X mm	Y mm	DIA mm	KEEPOUT mm
MT1	3.50	3.50	3.20	6.40
MT2	96.00	8.00	3.20	6.40
MT3	3.50	74.50	3.20	6.40
MT4	96.00	74.50	3.20	6.40

PMOD HOST HEADERS

PORT	REF	EDGE	CX mm	CY mm	PIN1 X mm	PIN1 Y mm
INPUT	J3	bottom	28.005	3.775	34.355	5.045
BIDIR	J5	bottom	50.865	3.775	57.215	5.045
OUTPUT	J6	bottom	73.725	3.775	80.075	5.045

FEATURE SCHEDULE

#	FEATURE	X EXTENT mm	Y EXTENT mm
1	USB-C power / control	60.78 to 71.42	69.73 to 79.15
2	7-segment display	89.50 to 97.50	25.50 to 37.50
3	LED D1	87.57 to 89.03	72.82 to 75.78
4	LED D2	83.02 to 84.48	72.82 to 75.78
5	LED D3	78.47 to 79.93	72.82 to 75.78
6	Fourth indicator LED - not on this board	-	-
7	8-way input DIP switch	18.50 to 27.50	35.25 to 57.75
8	Side Pmod J12 (not fitted)	-7.95 to 6.90	7.15 to 23.40
9	Side Pmod J13 (not fitted)	-7.95 to 6.90	30.01 to 46.26
10	Side Pmod J14 (not fitted)	-7.95 to 6.90	52.87 to 69.12


LEGEND

- Board outline
- Component body, scheduled
- Position not fitted on this revision
- Pmod connector body, hole keep-out
- Dimension, extension and leader

DB 06+ V2.1.2

tinytapeout-demo rev 2.1.2

DRAWN	VERSION	UNITS	SCALE
generated	v0.0-83-g296ee10+	mm	1:1
SIZE	SHEET	DRAWING NO	REV
A3	1 OF 1	TT-DB-04	A
MATERIAL		GENERAL TOLERANCE	
PCB, 1.6 nominal		edge +/-0.20 hole pos +/-0.10 hole dia +/-0.08	

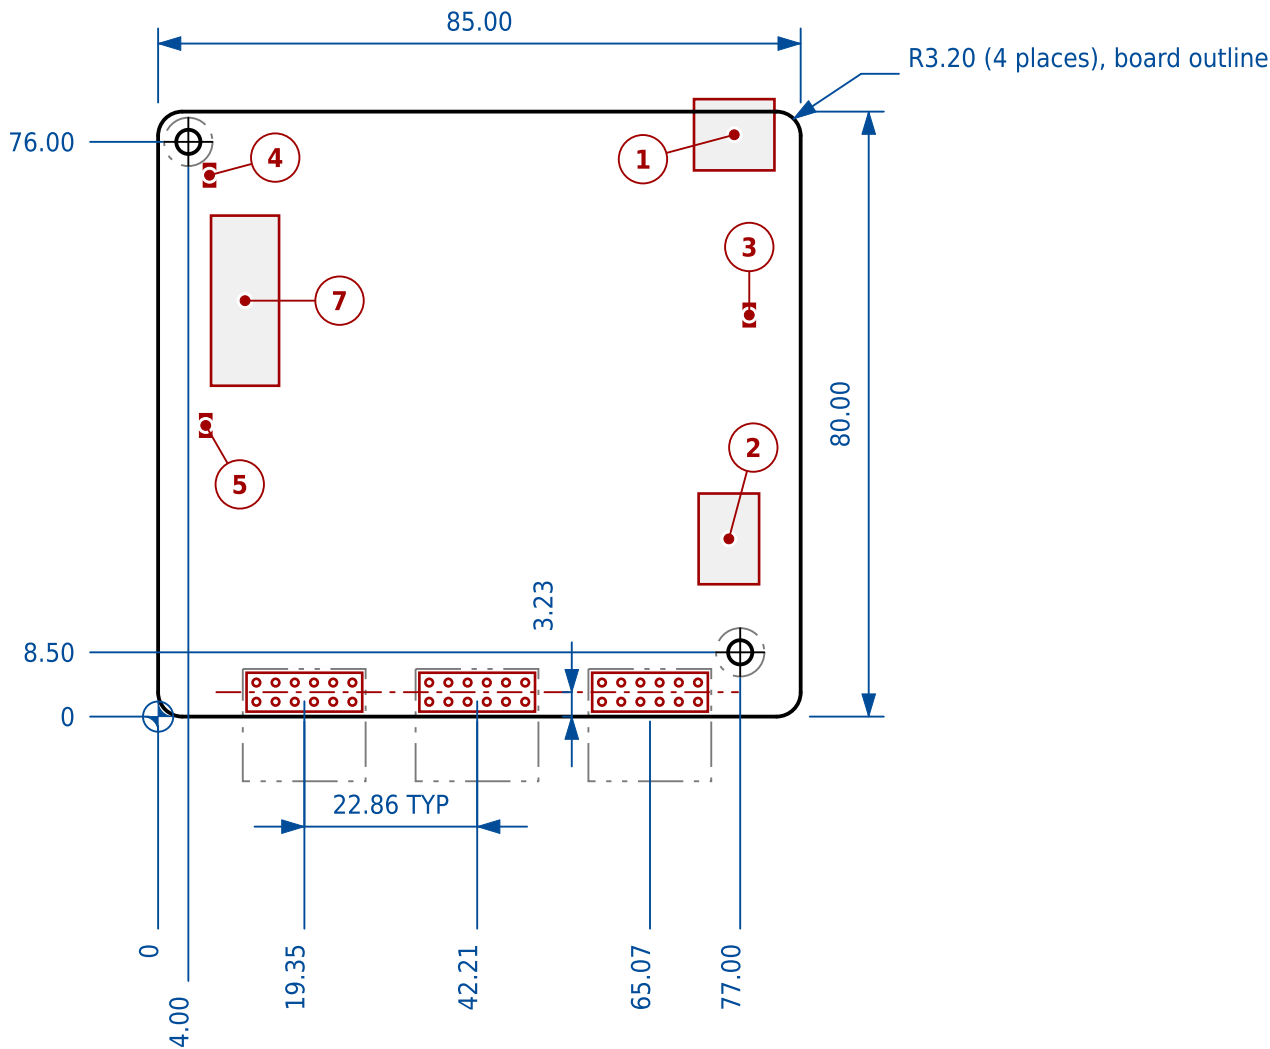

NOTES

- All dimensions in millimetres. The datum symbol marks the origin: the board's lower-left corner, X right, Y up, seen from the component side.
- Geometry is design nominal, read from the KiCad board file.
- Hole IDs are the board's own reference designators from the KiCad file, not assigned by this drawing, and are in no positional order.
- No other demo board revision shares this geometry.
- ETR is Tiny Tapeout's own designation for this board. The KiCad title block reads "Tiny Tapeout Demoboard v3" and does not carry it; the name here is the board's ID in Tiny Tapeout's board revision spreadsheet. Nothing mechanical depends on it.
- The Pmod host headers along the lower edge are what a mounting plate registers against. Their 22.86 mm (0.9 in) pitch, per the Digilent Pmod Interface Specification 1.2.0, is the same on every revision; their distance from the lower edge and their position along it are not.
- The chain-double-dot rectangle at each Pmod host is the connector body where it overhangs the edge: what a peripheral and a bracket must clear.

NOTES (continued)

- Pmod host coordinates are given to three decimals, unlike the rest of this sheet. Rounded to two, adjacent hosts print 22.85 apart and contradict the 22.86 pitch dimensioned here.
- Port names differ by family: JA, JB, JC on the adapter and Raspberry Pi sheets, by signal direction on the demo boards, PMOD 1 to 3 on the plate sheets. TT-MP-02 maps them.
- Board thickness is 1.6 mm nominal. The KiCad file's 1.56100 mm is its stackup sum, not a specified finished thickness.
- Assembled envelope, connector overhang included, is 85.00 x 81.65 mm against a 85.00 x 80.00 mm board outline. The FEATURE SCHEDULE gives the extents.
- Feature numbers are fixed across this family, so a number means the same part on every sheet. A part this board does not carry still has a row, marked as such.
- GENERAL TOLERANCE in the title block is a normal board-house figure, not one any source here states.
- Generated from the listed sources and not checked by a second party: there is no CHECKED field because nobody has signed it.

HOLE SCHEDULE

ID	X mm	Y mm	DIA mm	KEEPOUT mm
MT1	4.00	76.00	3.20	6.40
MT2	77.00	8.50	3.20	6.40

PMOD HOST HEADERS

PORT	REF	EDGE	CX mm	CY mm	PIN1 X mm	PIN1 Y mm
INPUT	J11	bottom	19.350	3.230	25.700	4.500
BIDIR	J12	bottom	42.210	3.230	48.560	4.500
OUTPUT	J13	bottom	65.070	3.230	71.420	4.500

FEATURE SCHEDULE

#	FEATURE	X EXTENT mm	Y EXTENT mm
1	USB-C power / control	70.89 to 81.53	72.23 to 81.65
2	7-segment display	71.50 to 79.50	17.50 to 29.50
3	LED D3	77.47 to 78.93	51.62 to 54.58
4	LED D4	6.07 to 7.53	70.11 to 73.07
5	LED D5	5.57 to 7.03	37.02 to 39.98
6	Fourth indicator LED - not on this board	-	-
7	8-way input DIP switch	7.00 to 16.00	43.75 to 66.25
8	Side Pmod, first position - not on this board	-	-
9	Side Pmod, second position - not on this board	-	-
10	Side Pmod, third position - not on this board	-	-

LEGEND

- Board outline
- Component body, scheduled
- Pmod connector body, hole keep-out
- Dimension, extension and leader


SOURCES

- KiCad board file: <https://github.com/TinyTapeout/tt-demo-pcb> tinytapeout-demo.kicad_pcb @ d830790ca - title block: Tiny Tapeout Demoboard v3 rev 3.2, dated 2025-11-12
- Shuttle mapping: https://docs.google.com/spreadsheets/d/1xD_uemuQcpUnXRY4twOrFzF0urjLVWMdqAnrOJLetM/edit?gid=1250963370 - row "DB ETR v3.2", Used by: TT09, TTSKY25a, TTSKY25b, TTGF0p2.

DB ETR V3.2

tinytapeout-demo rev 3.2

DRAWN generated	VERSION v0.0-83-g296ee10+	UNITS mm	SCALE 1:1
SIZE A3	SHEET 1 OF 1	DRAWING NO TT-DB-05	REV A
MATERIAL PCB, 1.6 nominal		GENERAL TOLERANCE edge +/-0.20 hole pos +/-0.10 hole dia +/-0.08	

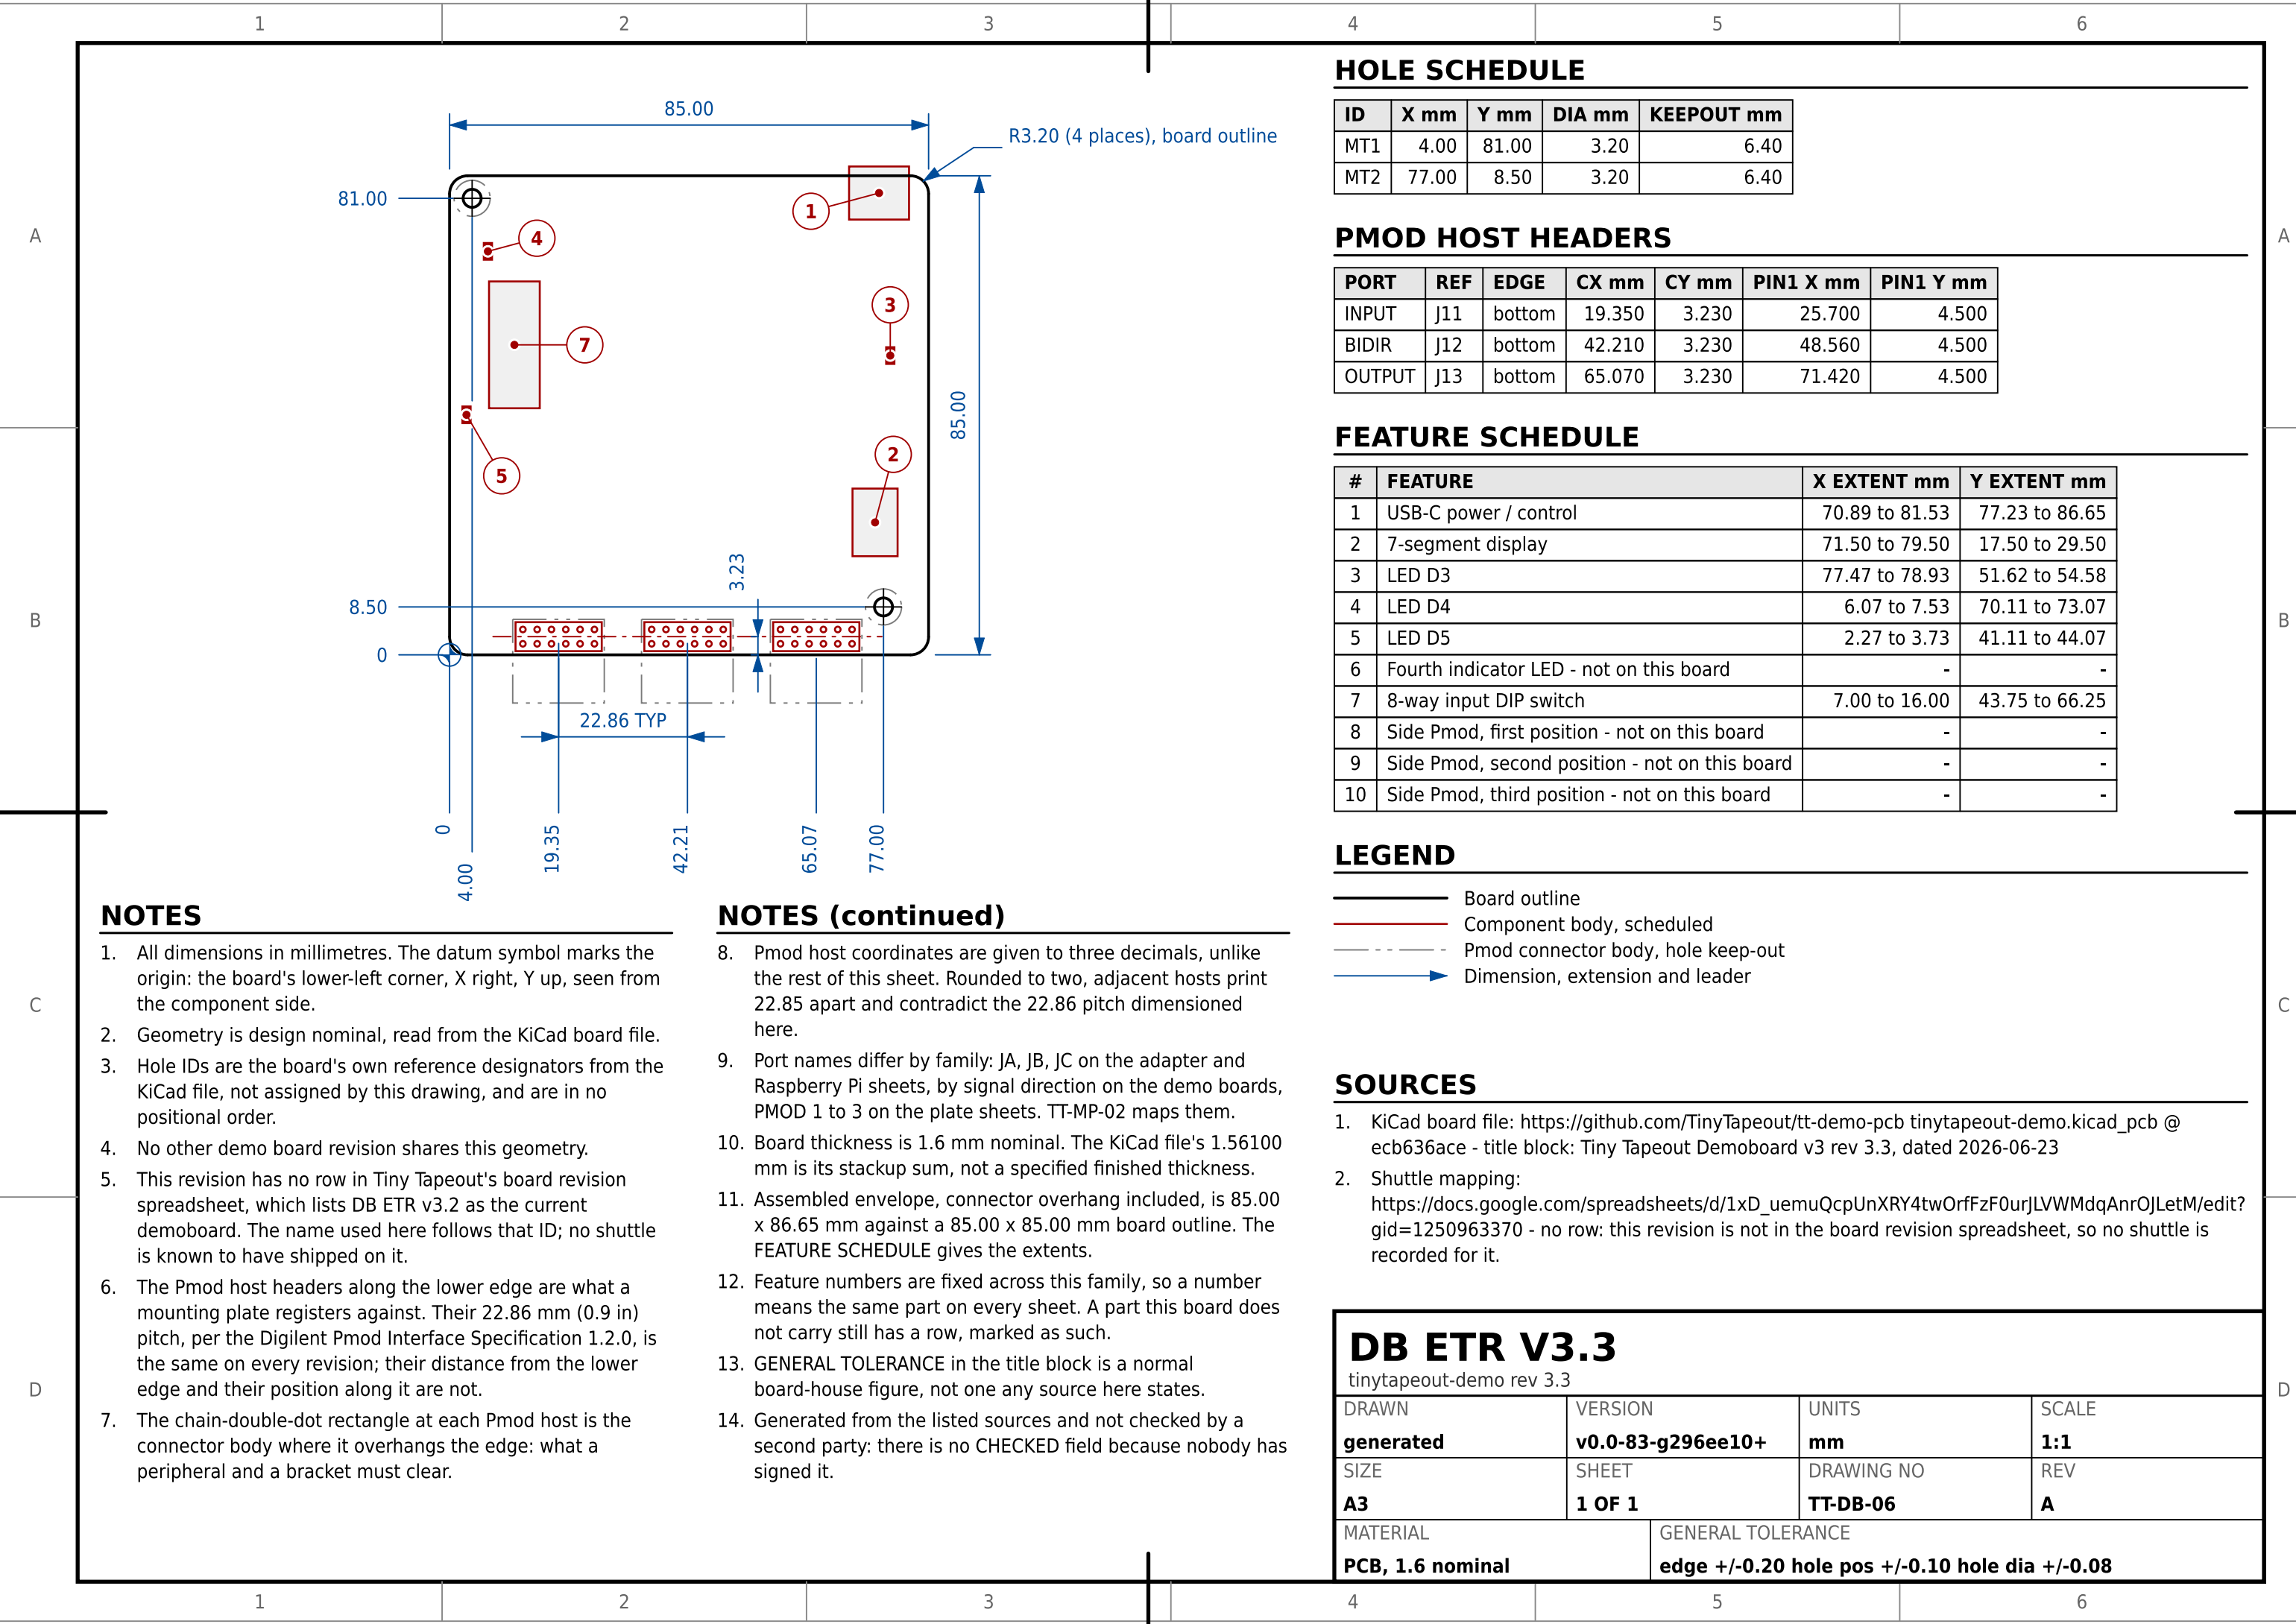

NOTES

- 1. All dimensions in millimetres. The datum symbol marks the origin: the board's lower-left corner, X right, Y up, seen from the component side.
- 2. Geometry is design nominal, read from the KiCad board file.
- 3. Hole IDs are the board's own reference designators from the KiCad file, not assigned by this drawing, and are in no positional order.
- 4. No other demo board revision shares this geometry.
- 5. This revision has no row in Tiny Tapeout's board revision spreadsheet, which lists DB ETR v3.2 as the current demoboard. The name used here follows that ID; no shuttle is known to have shipped on it.
- 6. The Pmod host headers along the lower edge are what a mounting plate registers against. Their 22.86 mm (0.9 in) pitch, per the Digilent Pmod Interface Specification 1.2.0, is the same on every revision; their distance from the lower edge and their position along it are not.
- 7. The chain-double-dot rectangle at each Pmod host is the connector body where it overhangs the edge: what a peripheral and a bracket must clear.

NOTES (continued)

- 8. Pmod host coordinates are given to three decimals, unlike the rest of this sheet. Rounded to two, adjacent hosts print 22.85 apart and contradict the 22.86 pitch dimensioned here.
- 9. Port names differ by family: JA, JB, JC on the adapter and Raspberry Pi sheets, by signal direction on the demo boards, PMOD 1 to 3 on the plate sheets. TT-MP-02 maps them.
- 10. Board thickness is 1.6 mm nominal. The KiCad file's 1.56100 mm is its stackup sum, not a specified finished thickness.
- 11. Assembled envelope, connector overhang included, is 85.00 x 86.65 mm against a 85.00 x 85.00 mm board outline. The FEATURE SCHEDULE gives the extents.
- 12. Feature numbers are fixed across this family, so a number means the same part on every sheet. A part this board does not carry still has a row, marked as such.
- 13. GENERAL TOLERANCE in the title block is a normal board-house figure, not one any source here states.
- 14. Generated from the listed sources and not checked by a second party: there is no CHECKED field because nobody has signed it.

HOLE SCHEDULE

ID	X mm	Y mm	DIA mm	KEEPOUT mm
MT1	4.00	81.00	3.20	6.40
MT2	77.00	8.50	3.20	6.40

PMOD HOST HEADERS

PORT	REF	EDGE	CX mm	CY mm	PIN1 X mm	PIN1 Y mm
INPUT	J11	bottom	19.350	3.230	25.700	4.500
BIDIR	J12	bottom	42.210	3.230	48.560	4.500
OUTPUT	J13	bottom	65.070	3.230	71.420	4.500

FEATURE SCHEDULE

#	FEATURE	X EXTENT mm	Y EXTENT mm
1	USB-C power / control	70.89 to 81.53	77.23 to 86.65
2	7-segment display	71.50 to 79.50	17.50 to 29.50
3	LED D3	77.47 to 78.93	51.62 to 54.58
4	LED D4	6.07 to 7.53	70.11 to 73.07
5	LED D5	2.27 to 3.73	41.11 to 44.07
6	Fourth indicator LED - not on this board	-	-
7	8-way input DIP switch	7.00 to 16.00	43.75 to 66.25
8	Side Pmod, first position - not on this board	-	-
9	Side Pmod, second position - not on this board	-	-
10	Side Pmod, third position - not on this board	-	-

LEGEND

- Board outline
- Component body, scheduled
- Pmod connector body, hole keep-out
- Dimension, extension and leader

SOURCES

- 1. KiCad board file: <https://github.com/TinyTapeout/tt-demo-pcb> tinytapeout-demo.kicad_pcb @ ecb636ace - title block: Tiny Tapeout Demoboard v3 rev 3.3, dated 2026-06-23
- 2. Shuttle mapping: https://docs.google.com/spreadsheets/d/1xD_uemuQcpUnXRY4twOrfFzF0urjLVWMdqAnrOJLetM/edit?gid=1250963370 - no row: this revision is not in the board revision spreadsheet, so no shuttle is recorded for it.

DB ETR V3.3

tinytapeout-demo rev 3.3

DRAWN	VERSION	UNITS	SCALE
generated	v0.0-83-g296ee10+	mm	1:1
SIZE	SHEET	DRAWING NO	REV
A3	1 OF 1	TT-DB-06	A
MATERIAL		GENERAL TOLERANCE	
PCB, 1.6 nominal		edge +/-0.20 hole pos +/-0.10 hole dia +/-0.08	