


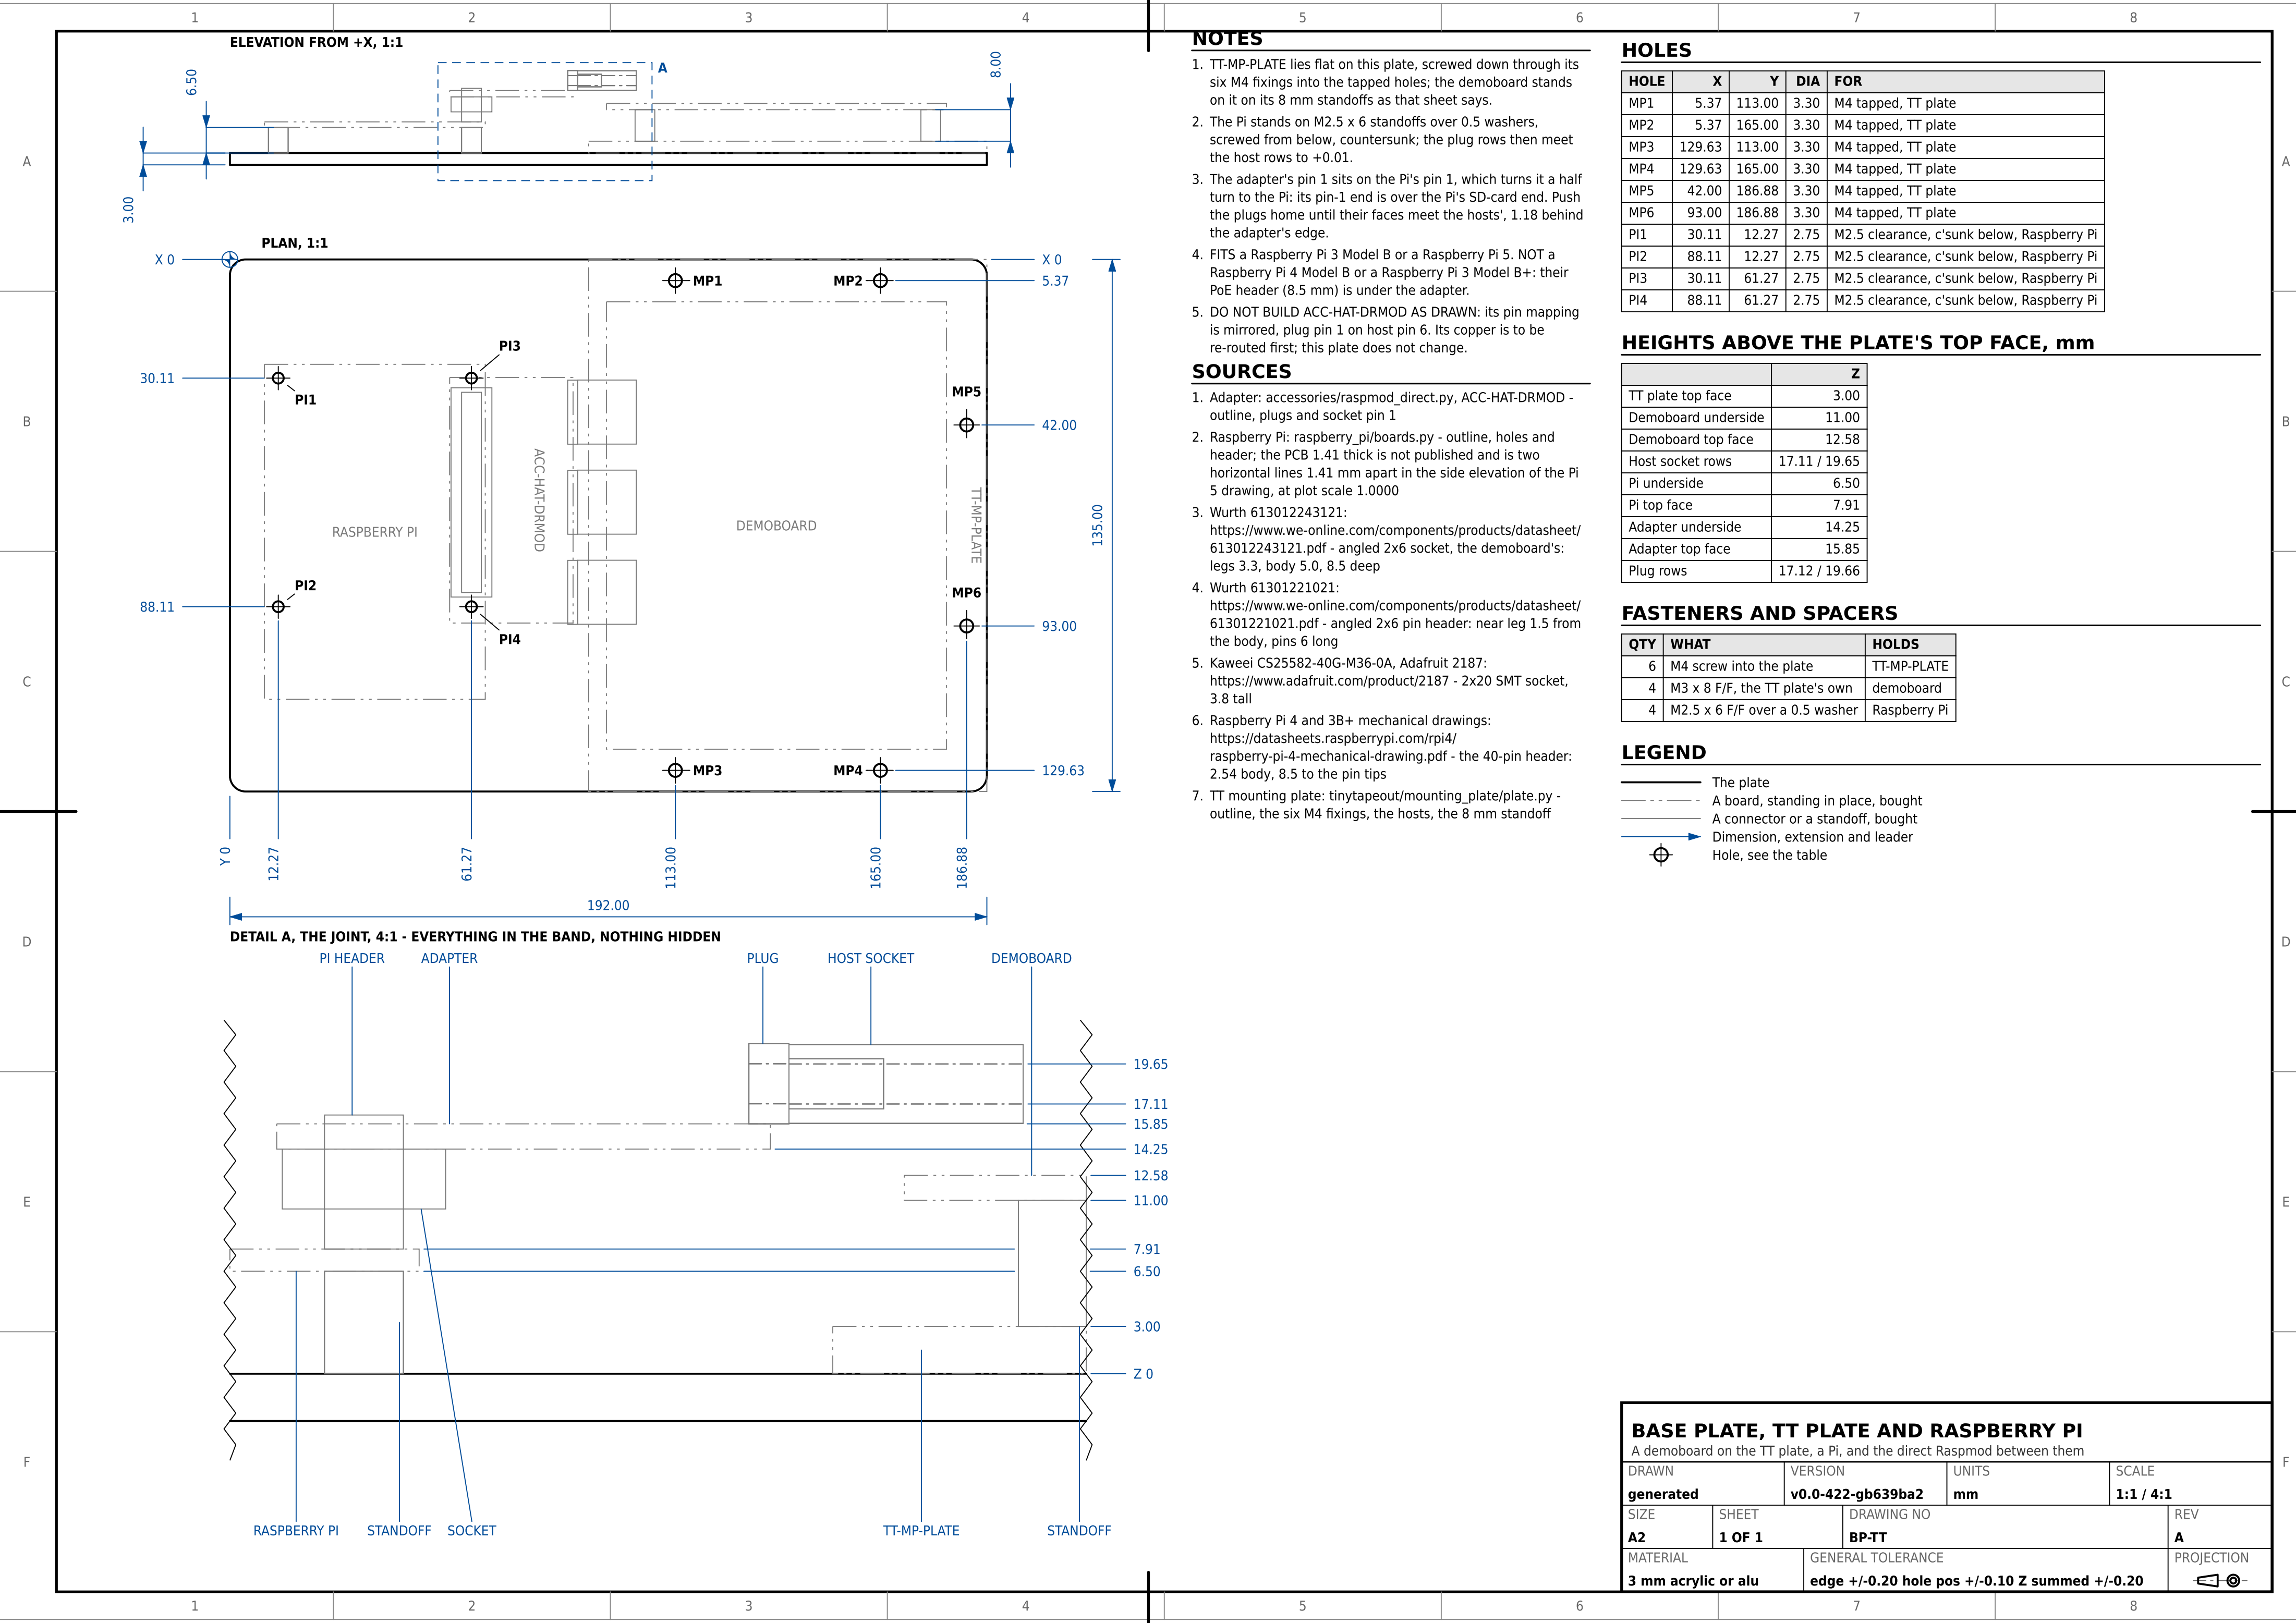

NOTES

1. TT-MP-PLATE lies flat on this plate, screwed down through its six M4 fixings into the tapped holes; the demoboard stands on it on its 8 mm standoffs as that sheet says.
2. The Pi stands on M2.5 x 6 standoffs over 0.5 washers, screwed from below, countersunk; the plug rows then meet the host rows to +0.01.
3. The adapter's pin 1 sits on the Pi's pin 1, which turns it a half turn to the Pi: its pin-1 end is over the Pi's SD-card end. Push the plugs home until their faces meet the hosts', 1.18 behind the adapter's edge.
4. FITS a Raspberry Pi 3 Model B or a Raspberry Pi 5. NOT a Raspberry Pi 4 Model B or a Raspberry Pi 3 Model B+: their PoE header (8.5 mm) is under the adapter.
5. DO NOT BUILD ACC-HAT-DRMOD AS DRAWN: its pin mapping is mirrored, plug pin 1 on host pin 6. Its copper is to be re-routed first; this plate does not change.

SOURCES

1. Adapter: accessories/raspmo... ACC-HAT-DRMOD - outline, plugs and socket pin 1
2. Raspberry Pi: raspberr... boards.py - outline, holes and header; the PCB 1.41 thick is not published and is two horizontal lines 1.41 mm apart in the side elevation of the Pi 5 drawing, at plot scale 1.0000
3. Wurth 613012243121: https://www.we-online.com/components/products/datasheet/613012243121.pdf - angled 2x6 socket, the demoboard's: legs 3.3, body 5.0, 8.5 deep
4. Wurth 61301221021: https://www.we-online.com/components/products/datasheet/61301221021.pdf - angled 2x6 pin header: near leg 1.5 from the body, pins 6 long
5. Kaweei CS25582-40G-M36-0A, Adafruit 2187: https://www.adafruit.com/product/2187 - 2x20 SMT socket, 3.8 tall
6. Raspberry Pi 4 and 3B+ mechanical drawings: https://datasheets.raspberrypi.com/rpi4/raspberry-pi-4-mechanical-drawing.pdf - the 40-pin header: 2.54 body, 8.5 to the pin tips
7. TT mounting plate: tinytapeout/mounting_plate/plate.py - outline, the six M4 fixings, the hosts, the 8 mm standoff

HOLES

HOLE	X	Y	DIA	FOR
MP1	5.37	113.00	3.30	M4 tapped, TT plate
MP2	5.37	165.00	3.30	M4 tapped, TT plate
MP3	129.63	113.00	3.30	M4 tapped, TT plate
MP4	129.63	165.00	3.30	M4 tapped, TT plate
MP5	42.00	186.88	3.30	M4 tapped, TT plate
MP6	93.00	186.88	3.30	M4 tapped, TT plate
PI1	30.11	12.27	2.75	M2.5 clearance, c'sunk below, Raspberry Pi
PI2	88.11	12.27	2.75	M2.5 clearance, c'sunk below, Raspberry Pi
PI3	30.11	61.27	2.75	M2.5 clearance, c'sunk below, Raspberry Pi
PI4	88.11	61.27	2.75	M2.5 clearance, c'sunk below, Raspberry Pi

HEIGHTS ABOVE THE PLATE'S TOP FACE, mm

	Z
TT plate top face	3.00
Demoboard underside	11.00
Demoboard top face	12.58
Host socket rows	17.11 / 19.65
Pi underside	6.50
Pi top face	7.91
Adapter underside	14.25
Adapter top face	15.85
Plug rows	17.12 / 19.66

FASTENERS AND SPACERS

QTY	WHAT	HOLDS
6	M4 screw into the plate	TT-MP-PLATE
4	M3 x 8 F/F, the TT plate's own	demoboard
4	M2.5 x 6 F/F over a 0.5 washer	Raspberry Pi

LEGEND

- The plate
- - - A board, standing in place, bought
- A connector or a standoff, bought
- Dimension, extension and leader
- ⊕ Hole, see the table

BASE PLATE, TT PLATE AND RASPBERRY PI

A demoboard on the TT plate, a Pi, and the direct Raspmo... between them

DRAWN	VERSION	UNITS	SCALE
generated	v0.0-422-gb639ba2	mm	1:1 / 4:1
SIZE	SHEET	DRAWING NO	REV
A2	1 OF 1	BP-TT	A
MATERIAL	GENERAL TOLERANCE	PROJECTION	
3 mm acrylic or alu	edge +/-0.20 hole pos +/-0.10 Z summed +/-0.20		