


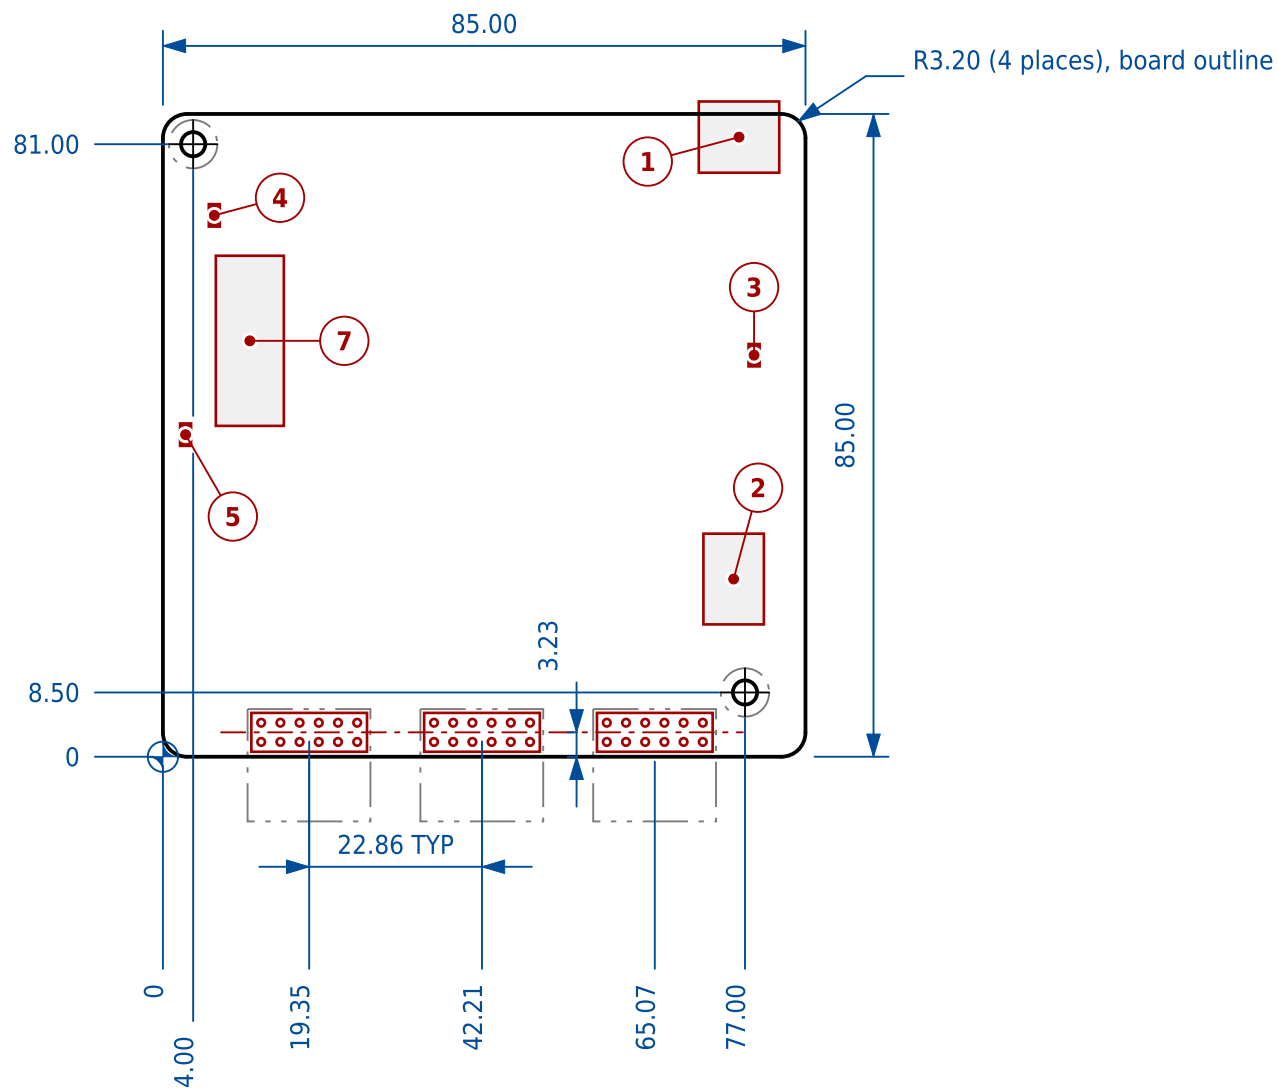

NOTES

1. Viewed from the component side.
2. Hole IDs are the KiCad reference designators.
3. Not in Tiny Tapeout's board revision spreadsheet, so no shuttle or kit is known to have shipped on it; the name follows the v3.2 ID.
4. Pmod host pitch, 22.86 mm (0.9 in), is the Digilent Pmod Interface Specification 1.2.0 figure and is the same on every revision; the mounting plate, TT-MP-01, registers against it.
5. Assembled envelope, connector overhang included: 85.00 x 86.65 mm.

SOURCES

1. KiCad board file: <https://github.com/TinyTapeout/tt-demo-pcb> tinytapeout-demo.kicad_pcb @ ecb636ace - title block: Tiny Tapeout Demoboard v3 rev 3.3, dated 2026-06-23
2. Shuttle mapping: https://docs.google.com/spreadsheets/d/1xD_uemuQcpUnXRY4twOrFzF0urJLVWMDqAnrOJLetM/edit?gid=1250963370 - no row: this revision is not in the board revision spreadsheet, so no shuttle is recorded for it.

HOLE SCHEDULE

ID	X mm	Y mm	DIA mm	KEEPOUT mm
MT1	4.00	81.00	3.20	6.40
MT2	77.00	8.50	3.20	6.40

PMOD HOST HEADERS

PORT	REF	EDGE	CX mm	CY mm	PIN1 X mm	PIN1 Y mm
INPUT	J11	bottom	19.350	3.230	25.700	4.500
BIDIR	J12	bottom	42.210	3.230	48.560	4.500
OUTPUT	J13	bottom	65.070	3.230	71.420	4.500

FEATURE SCHEDULE

#	FEATURE	X EXTENT mm	Y EXTENT mm
1	USB-C power / control	70.89 to 81.53	77.23 to 86.65
2	7-segment display	71.50 to 79.50	17.50 to 29.50
3	LED D3	77.47 to 78.93	51.62 to 54.58
4	LED D4	6.07 to 7.53	70.11 to 73.07
5	LED D5	2.27 to 3.73	41.11 to 44.07
6	Fourth indicator LED - not on this board	-	-
7	8-way input DIP switch	7.00 to 16.00	43.75 to 66.25
8	Second DIP switch - not on this board	-	-
9	Side Pmod, first position - not on this board	-	-
10	Side Pmod, second position - not on this board	-	-
11	Side Pmod, third position - not on this board	-	-

LEGEND

- Board outline
- Component body, scheduled
- Pmod connector body, hole keep-out
- Dimension, extension and leader

DB ETR V3.3

tinytapeout-demo rev 3.3

DRAWN generated	VERSION v0.0-105-gb234968	UNITS mm	SCALE 1:1
SIZE A3	SHEET 1 OF 1	DRAWING NO TT-DB-06	REV A
MATERIAL PCB, 1.6 nominal		GENERAL TOLERANCE edge +/-0.20 hole pos +/-0.10 hole dia +/-0.08	