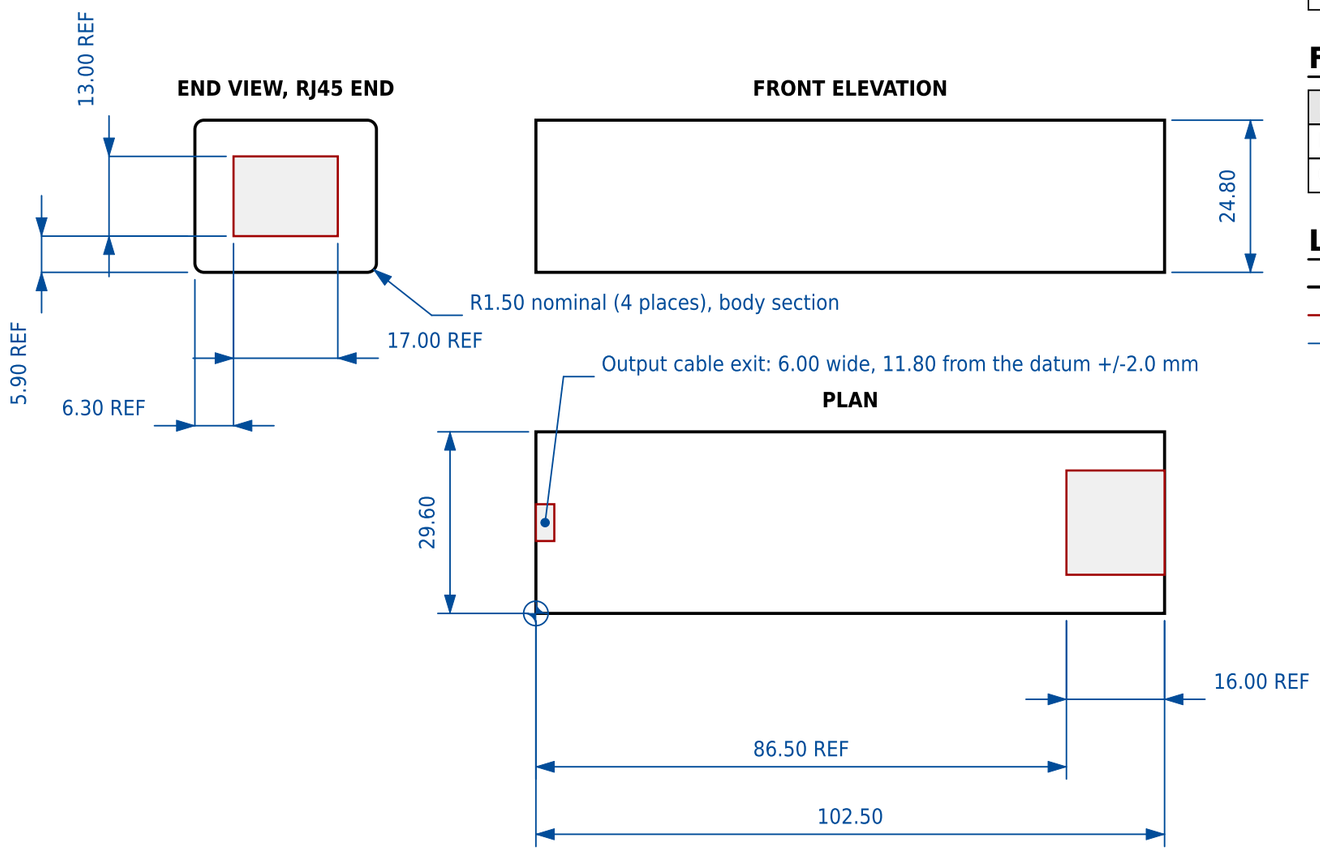



## ENVELOPE

| DIMENSION | mm |
|---|---|
| Overall length | 102.50 |
| Overall width | 29.60 |
| Overall height | 24.80 |

## FEATURES (PLAN VIEW)

| FEATURE | X EXTENT mm | Y EXTENT mm |
|---|---|---|
| RJ45 PoE input, in the end plate | 86.50 to 102.50 | 6.30 to 23.30 |
| Output cable exit | 0.00 to 3.00 | 11.80 to 17.80 |

## LEGEND

- Body envelope
- Aperture or cable exit
- Dimension, extension and leader

## NOTES

1. Origin at the datum on the plan: X along the length, Y across the width, Z up.
2. Dimensions marked REF are scaled from vendor photographs, good to about +/-1.5 mm, and are not for inspection. The RJ45 aperture is a standard 8P8C envelope placed centrally, as the vendor does not dimension it.
3. Output is a USB-C male plug on a captive lead from the cable exit, not a receptacle. Lead length is not published; allow for the plug and its bend radius.
4. No mounting holes: a bracket has to clamp or strap the body. The end-plate corner screws are not published.
5. Finned extrusion; the fins are not drawn and the outline is the overall envelope.

## SOURCES

1. Product page: https://www.waveshare.com/poe-splitter-25w-type-c.htm - Specification table: "DIMENSIONS 102.5 x 29.6 x 24.8mm (L x W x H)"; "POE INPUT VOLTAGE 37V ~ 57V"; "POWER OUTPUT 5V 5A (MAX)"; IEEE 802.3af/at.
2. Dimension drawing: https://www.waveshare.com/img/devkit/accBoard/POE-SPLITTER-25W-TYPE-C/POE-SPLITTER-25W-TYPE-C-details-size.jpg - Annotated 102.50 / 29.60 / 24.80, unit mm, matching the specification table.

# WAVESHARE POE SPLITTER 25 W, TYPE-C

POE-SPLITTER-25W-TYPE-C, extruded aluminium body

| DRAWN | VERSION | UNITS | SCALE |
|---|---|---|---|
| **generated** | **v0.0-171-g3d6831c** | **mm** | **1:1** |

| SIZE | SHEET | DRAWING NO | REV |
|---|---|---|---|
| **A3** | **1 OF 1** | **ACC-POE-USBC** | **A** |

| MATERIAL | GENERAL TOLERANCE | PROJECTION |
|---|---|---|
| **aluminium extrusion** | **envelope +/-1.0 unless noted** | |