


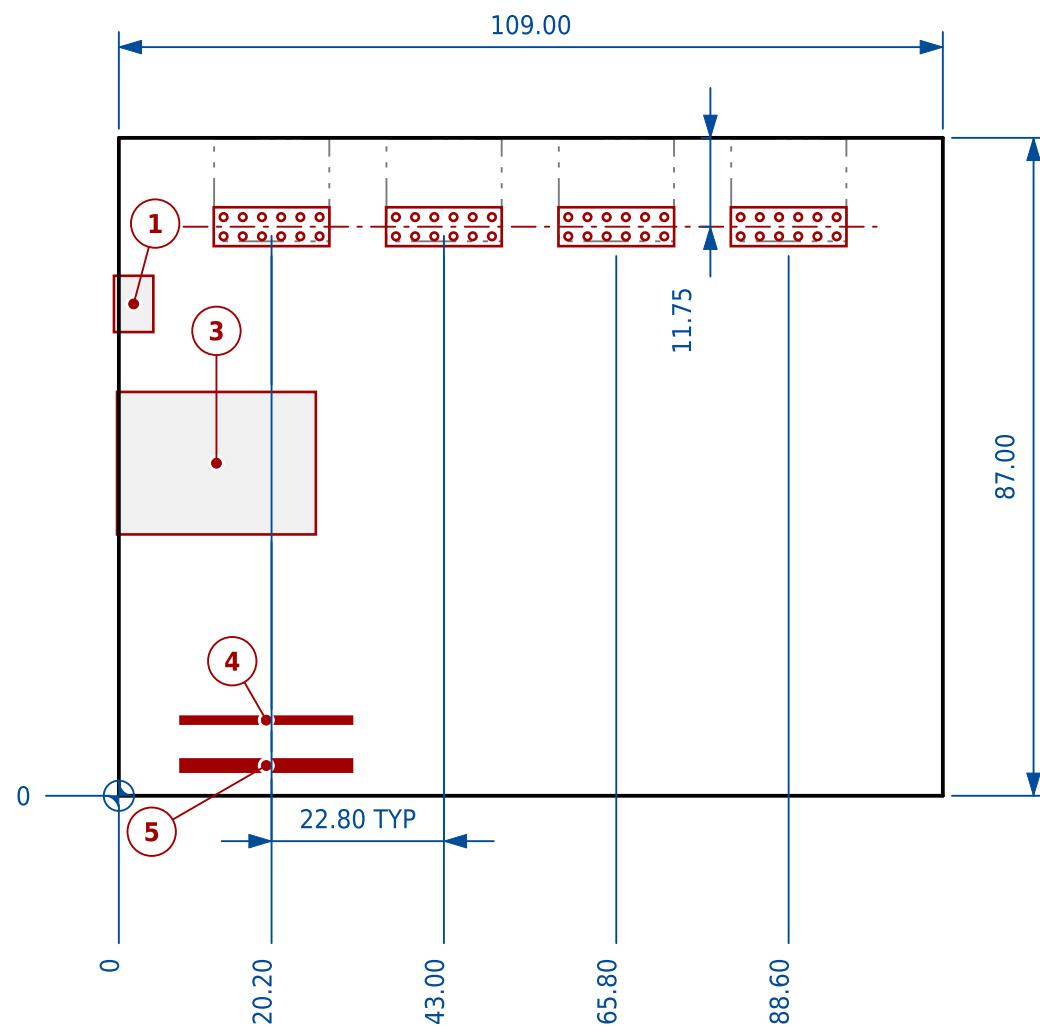

NOTES

1. Viewed from the component side.
2. No mounting holes. The drawing shows four 10.0 mm rubber feet centred 5.0 mm from each corner; a plate has to carry the board on those or clamp its edges.
3. The Pmod pin rows are 2.50 mm apart on the drawing, not 2.54, and the hosts are on a 22.80 mm pitch where the PDF's dimension reads 0.90 in; both within the general tolerance.
4. JA is nearest the USB and Ethernet corner, per the reference manual's callout figure.
5. The 1.6 x 1.6 mm LED row nearest the edge is taken as the tri-colour LD0-LD3 and the 0603 row behind it as LD4-LD7; no source names them.
6. Bodies read from the PDF plot are good to about +/-0.3 mm; the DXF figures carry the general tolerance.
7. Assembled envelope, connector overhang included: 109.65 x 87.00 mm.

SOURCES

1. Mechanical drawing:
https://digilent.com/reference/_media/reference/programmable-logic/arty-a7/arty_a7.zip - Digilent, Arty_A7_DXF.DXF and Mechanical_Arty_A7.pdf, dated 2020-09-02. Outline, pin fields, slots and pegs from the DXF; component bodies from the PDF, whose plot scale is recovered from the outline (axes agree to 0.20 %).
2. 3D model: https://digilent.com/reference/_media/reference/programmable-logic/arty/arty_rev_cad.zip - Digilent, Arty Rev C: used only to identify which of the PDF's outlines are the eight user LEDs.
3. Reference manual:
<https://digilent.com/reference/programmable-logic/arty-a7/reference-manual> - Pmod JA, JB, JC, JD; four tri-colour and four single LEDs.
4. Mounting:
<https://forum.digilent.com/topic/4523-410-319-mounting/> - Digilent staff, 2017-07-19: "There are no thru holes or mounting provisions"; the board stands on rubber feet.

PMOD HOST HEADERS

PORT	EDGE	CX mm	CY mm	PIN1 X mm	PIN1 Y mm
JA	top	20.200	75.250	13.850	74.000
JB	top	43.000	75.250	36.650	74.000
JC	top	65.800	75.250	59.450	74.000
JD	top	88.600	75.250	82.250	74.000

FEATURE SCHEDULE

#	FEATURE	X EXTENT mm	Y EXTENT mm
1	micro-USB J10, programming and console	-0.65 to 4.56	61.32 to 68.76
2	Second USB port - not on this board	-	-
3	Ethernet RJ45 J9	-0.24 to 26.06	34.56 to 53.40
4	LEDs LD4-LD7, 4 on 7.00 mm pitch	8.16 to 30.84	9.54 to 10.46
5	Tri-colour LEDs LD0-LD3, 4 on 7.00 mm pitch	8.16 to 30.84	3.19 to 4.80
6	Expansion connector, first - not on this board	-	-
7	Expansion connector, second - not on this board	-	-
8	Expansion connector, third - not on this board	-	-

LEGEND

- Board outline
- Component body, scheduled
- Pmod connector body
- Dimension, extension and leader

DIGILENT ARTY A7

A7-35T and A7-100T

DRAWN	VERSION	UNITS	SCALE
generated	v0.0-171-g3d6831c	mm	1:1
SIZE	SHEET	DRAWING NO	REV
A3	1 OF 1	FPGA-ARTY-A7	A
MATERIAL	GENERAL TOLERANCE		
PCB, thickness not stated	edge +/-0.20 hole pos +/-0.10 hole dia +/-0.08		